


AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

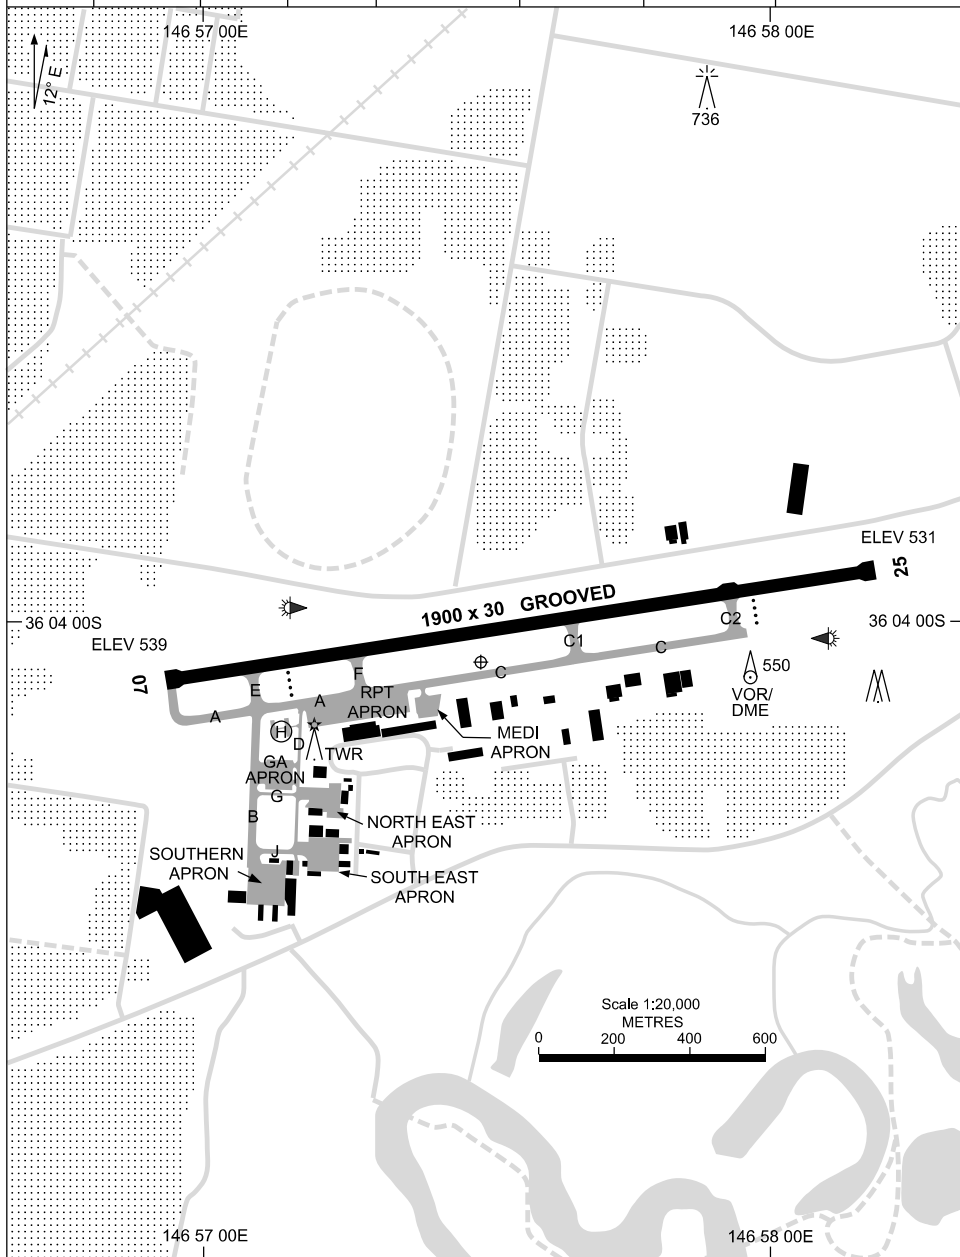

Changes: FROM SUP H24/26.

MAYAD01-187

27 NOV 2025

AD ELEV 539
36 04 04S 146 57 29E

AERODROME CHART - Page 2
ALBURY, NSW (YMAY)

AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

--	--	--	--	--	--	--	--

RWY	AERODROME LIGHTING						
	ABN : OCC W 6 SEC TAXIWAYS : BLUE EDGE ON TWY A, B, C, E, F AND J. BLUE REFLECTIVE EDGE ON TWY D. RL : AFRU+PAL 123.25, SDBY (4 SEC DURING LVP, UP TO 15 SEC OT) PTBL IN EMERG						
07 069	PAPI RIGHT SIDE 3.0° 51.6FT MIRL RTIL						
249 25	PAPI LEFT SIDE 3.0° 51.4FT MIRL RTIL						

--	--





NOTES

- 1. PAPI RWY 25 NOT TO BE USED BEYOND 3NM FROM AD WHEN R368 ACT SFC-2200.
- 2. AWIS REQUIRES ONE ONE-SECOND PULSE TO ACTIVATE.

DME or GNSS ARRIVAL PROCEDURES ALBURY, NSW (YMAJ) Page 1

30 NOV 2023

AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

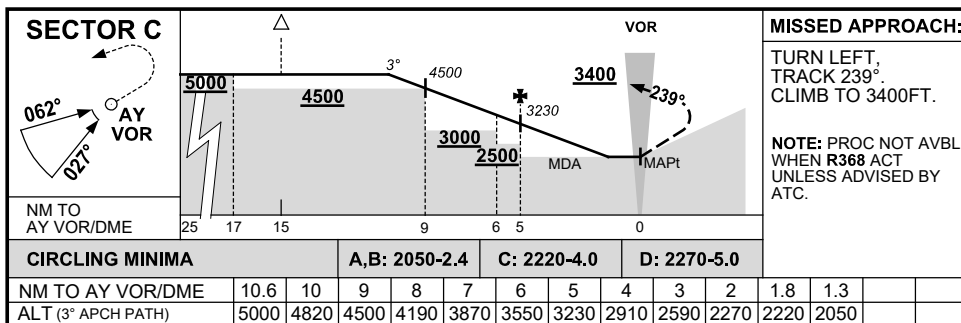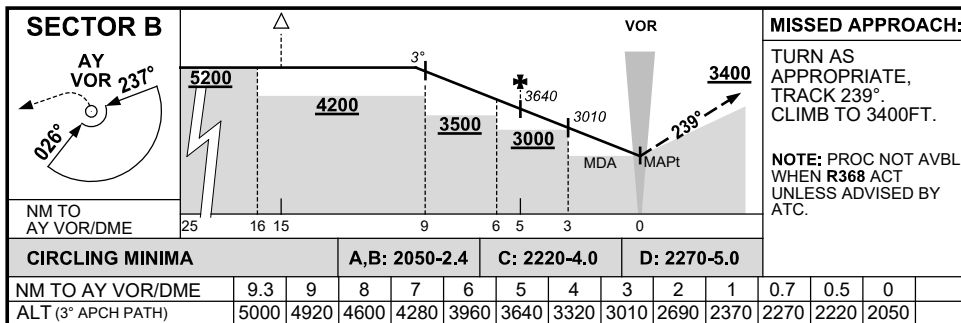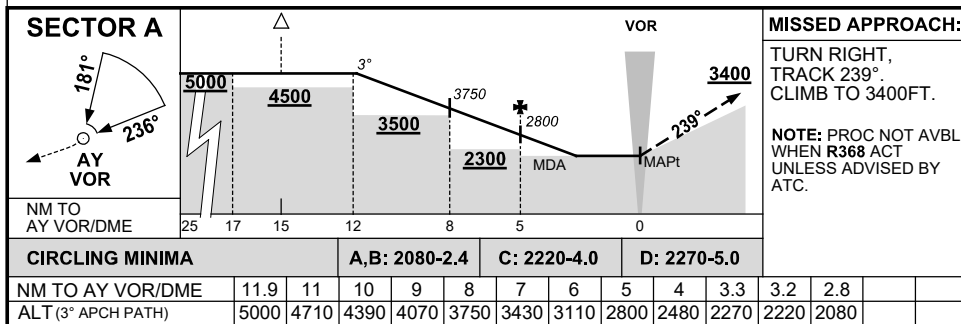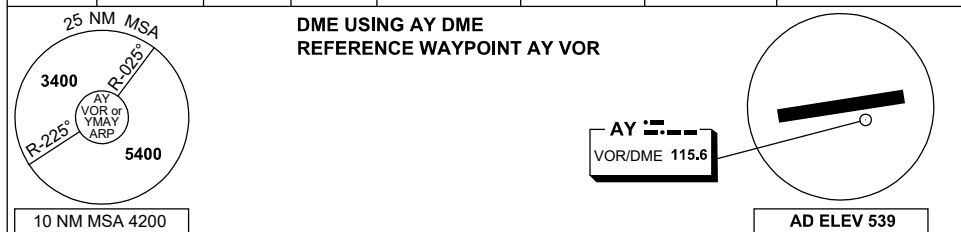


Changes: SEC-A CAT AB MINIMA, CIRCLING CAT C MINIMA, DIST-ALT TABLE, NEW LOGO.

MAYDG01-177

DME or GNSS ARRIVAL PROCEDURES
ALBURY, NSW (YMAY) Page 2


30 NOV 2023

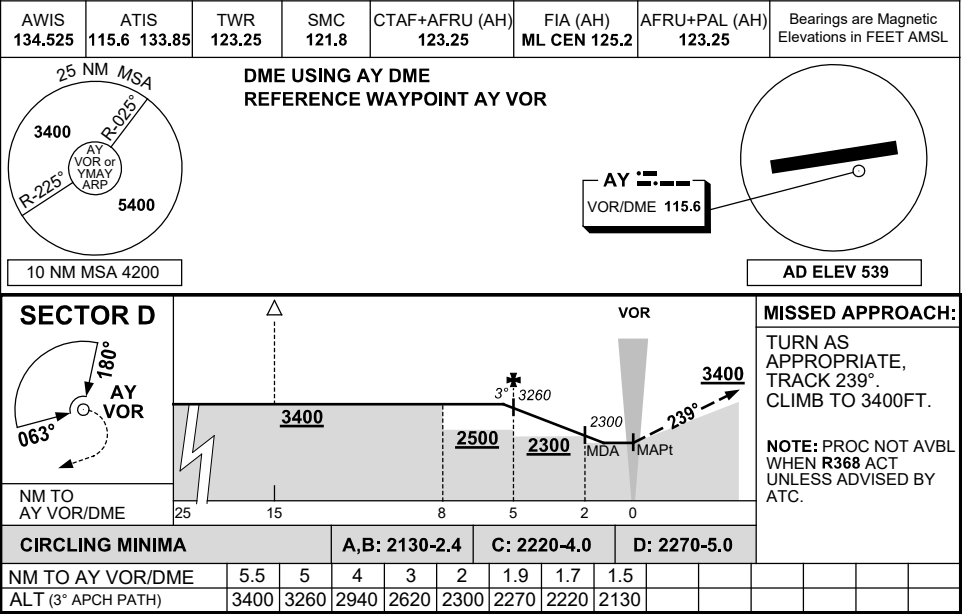

STANDARD INSTRUMENT DEPARTURES (SID)
DUGGI ONE DEPARTURE (RNAV)
ALBURY, NSW (YMAY)

30 NOV 2023

AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

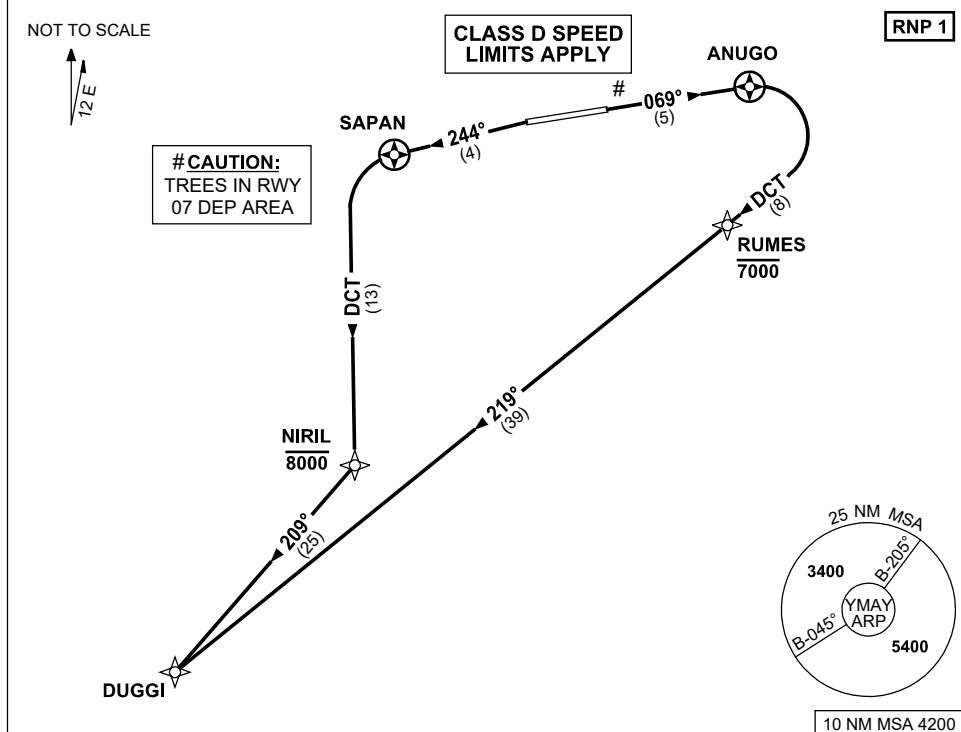

DUGGI ONE DEPARTURE

RWY 07

- GRAD 5.6% TO 2600ft THEN 3.3%
- Track 069° to ANUGO
- Turn RIGHT, track DCT to RUMES
Cross RUMES AT or BLW 7000ft
- Track 219° to DUGGI

NOTE: PROC NOT AVBL WHEN R368 ACT
UNLESS ADVISED BY ATC.


RWY 25

- GRAD 4.8% TO 1400ft THEN 3.3%
(5.0% TO 2500ft)
- NOT BEFORE DER turn LEFT,
track 244° to SAPAN
- Turn LEFT, track DCT to NIRIL
Cross NIRIL AT or BLW 8000ft
- Turn RIGHT, track 209° to DUGGI

STANDARD INSTRUMENT DEPARTURES (SID) UGVER ONE DEPARTURE (RNAV) ALBURY, NSW (YMAY)

30 NOV 2023

AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

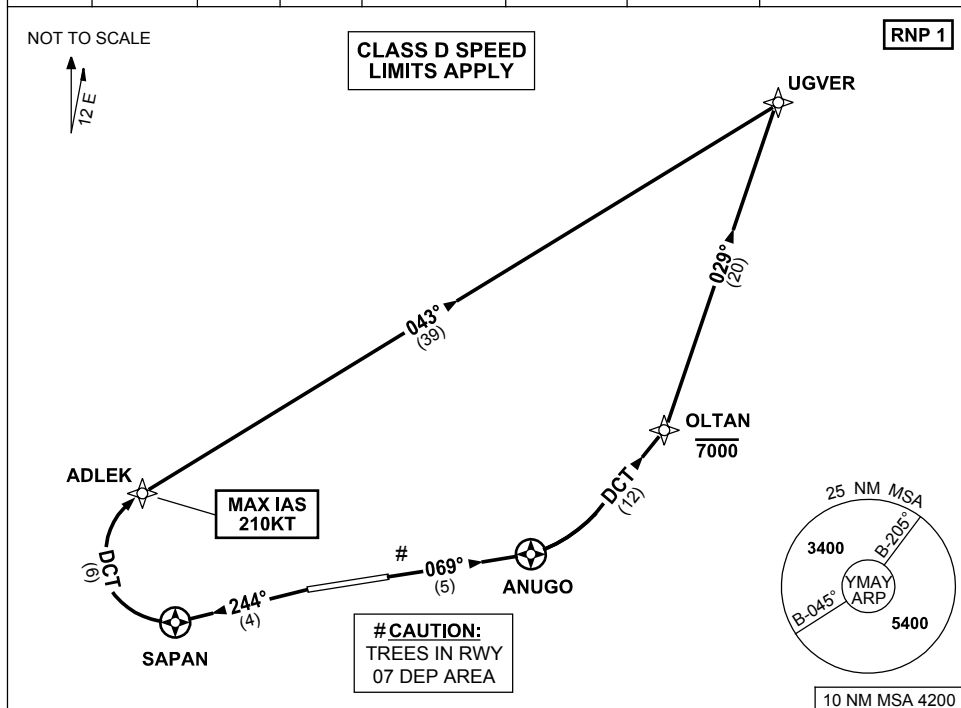

UGVER ONE DEPARTURE

RWY 07

- GRAD 4.8% TO 1700ft THEN 3.3%
- Track 069° to ANUGO
- Turn LEFT, track DCT to OLTAN
- **Cross** OLTAN AT or BLW 7000ft
- Track 029° to UGVER



NOTE: PROC NOT AVBL WHEN R368 ACT
UNLESS ADVISED BY ATC.

RWY 25

- GRAD 4.8% TO 1900ft THEN 3.3% (5.0% TO 2500ft)
- NOT BEFORE DER turn LEFT, track 244° to SAPAN
- Turn RIGHT, track DCT to ADLEK
- **MAX IAS** 210KT to ADLEK
- Track 043° to UGVER

USE QNH

RNP Z RWY 07

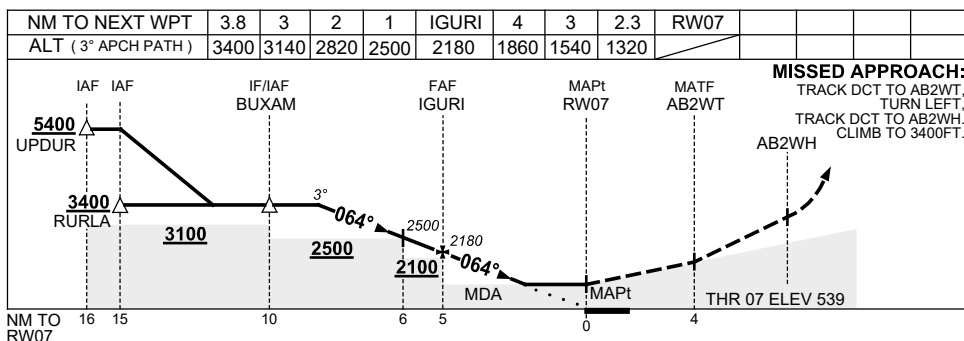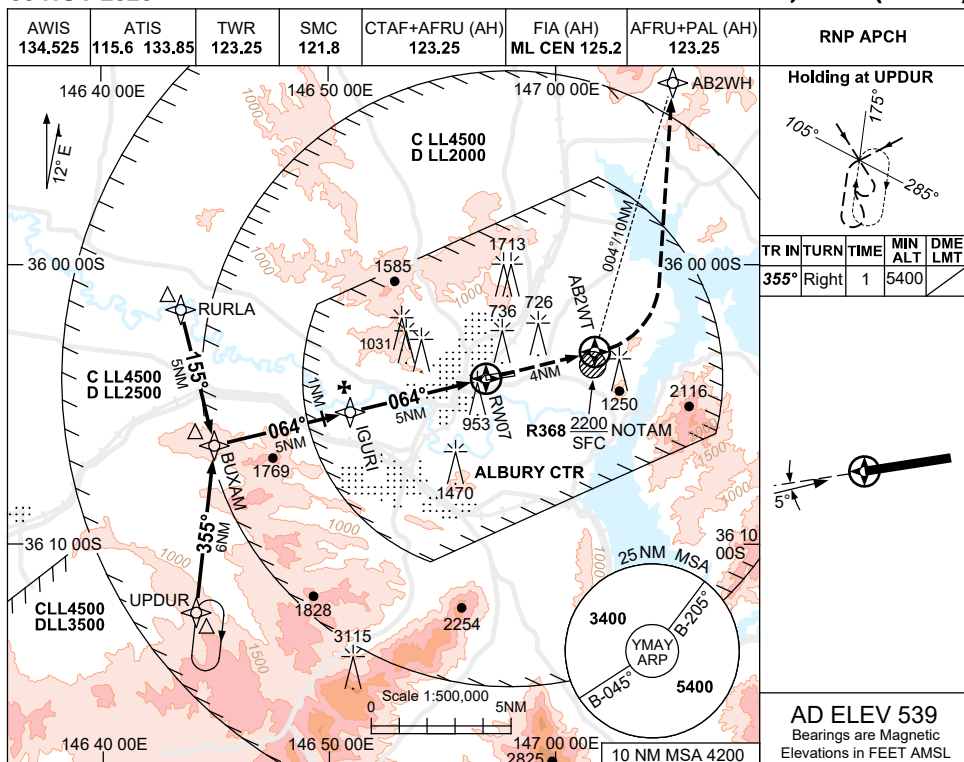ALBURY, NSW (YMAY)**30 NOV 2023****NOTES**

1. MAX IAS:
INITIAL : 210KT.
2. COLOUR: SEE
SPEC NOTICES.
3. PROC NOT AVBL
WHEN R368 ACT
UNLESS ADVISED
BY ATC.

Changes: LNAV MINIMA, CIRCLING & ALTERNATE CAT C MINIMA, DIST-ALT TABLE, NEW LOGO.



MAYGN02-177

USE QNH

RNP RWY 25

ALBURY, NSW (YMAY)

30 NOV 2023

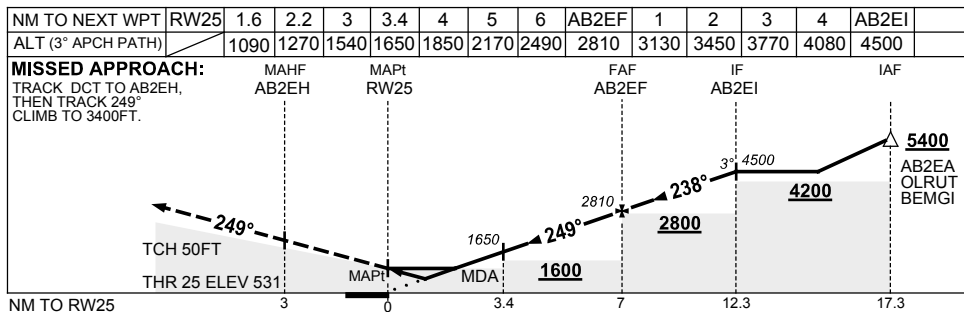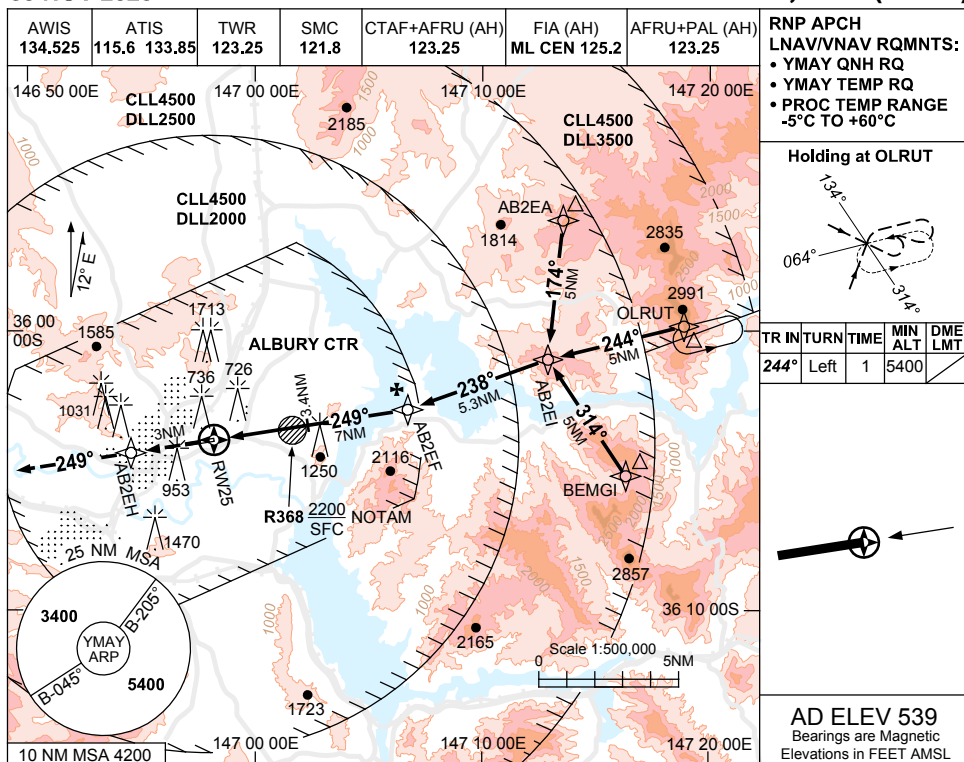

NOTES

- MAX IAS:
INITIAL : 210KT.
- COLOUR: SEE
SPEC NOTICES.
- HLDG NOT
CONTAINED IN CTA.
- PROC NOT AVBL
WHEN R368 ACT
UNLESS ADVISED
BY ATC.

CATEGORY	A	B	C	D
LNAV/VNAV	1090 (559-3.2)			
LNAV	1270 (739-4.2)			
CIRCLING	2050 (1511-2.4)	2220 (1681-4.0)	2270 (1731-5.0)	
ALTERNATE	(2011-4.4)	(2181-6.0)	(2231-7.0)	


Changes: CIRCLING & ALTERNATE CAT C MINIMA, Editorial.

MAYGN04-177

**STANDARD INSTRUMENT ARRIVAL (STAR)
VEGRU ONE ARRIVAL (RNAV)
ALBURY, NSW (YMAY)**

23 MAR 2023

AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

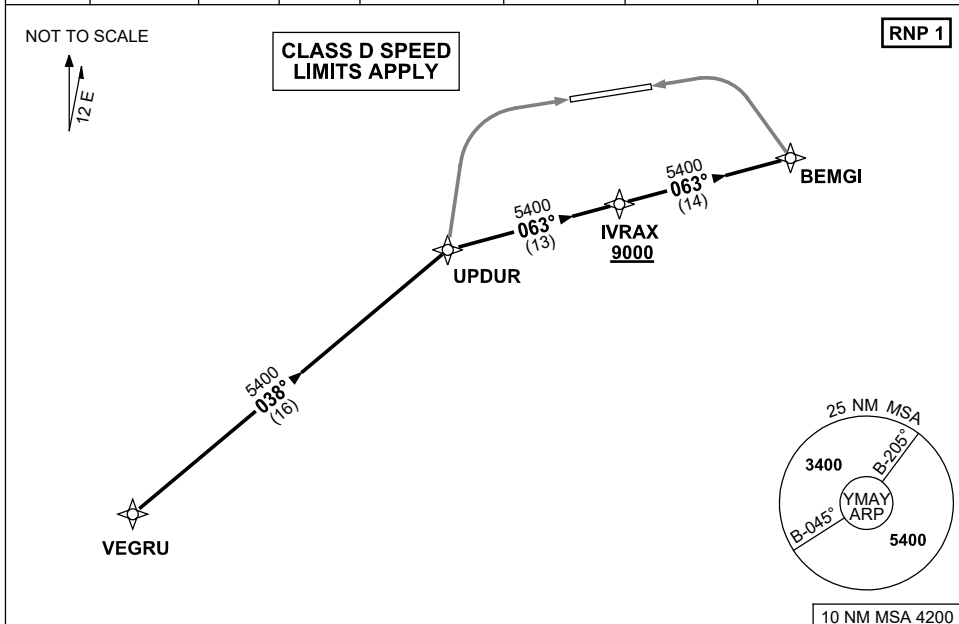

ARRIVAL: VEGRU ONE

- From VEGRU track 038° to UPDUR

RWY 07:

- Track via RNP Z RWY 07 or
RNP Y RWY 07 (LNAV/VNAV ONLY)

NOTE: PROC NOT AVBL WHEN R368 ACT
UNLESS ADVISED BY ATC.


RWY 25:

- Track 063° to IVRAX
Cross IVRAX AT or ABV 9000ft
- Track 063° to BEMGI
- Track via RNP RWY 25

STANDARD INSTRUMENT ARRIVAL (STAR)
ARRAN ONE ARRIVAL (RNAV)
ALBURY, NSW (YMAY)

23 MAR 2023

AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25	Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------	--

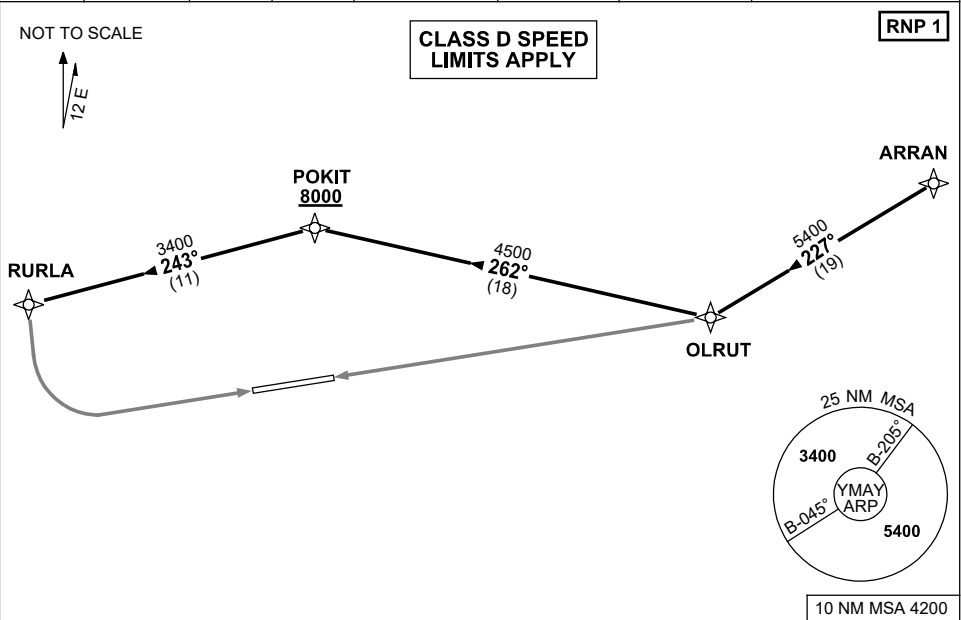

ARRIVAL: ARRAN ONE

- From ARRAN track 227° to OLRUT

RWY 07:

- Track 262° to POKIT
Cross POKIT AT or ABV 8000ft
- Turn LEFT, track 243° to RURLA
- Track via RNP Z RWY 07 or
RNP Y RWY 07 (LNAV/VNAV ONLY)

RWY 25:

- Track via RNP RWY 25

NOTE: PROC NOT AVBL WHEN R368 ACT
UNLESS ADVISED BY ATC.

VOR RWY 07
ALBURY, NSW (YMAY)


AWIS 134.525	ATIS 115.6 133.85	TWR 123.25	SMC 121.8	CTAF+AFRU (AH) 123.25	FIA (AH) ML CEN 125.2	AFRU+PAL (AH) 123.25
-----------------	----------------------	---------------	--------------	--------------------------	--------------------------	-------------------------

NAVAID RQ:			
• DME			

Holding at AY VOR			
TR IN TURN	TIME	MIN ALT	DME LMT
281° Right	1	3500	

--

AD ELEV 539 Bearings are Magnetic Elevations in FEET AMSL
--

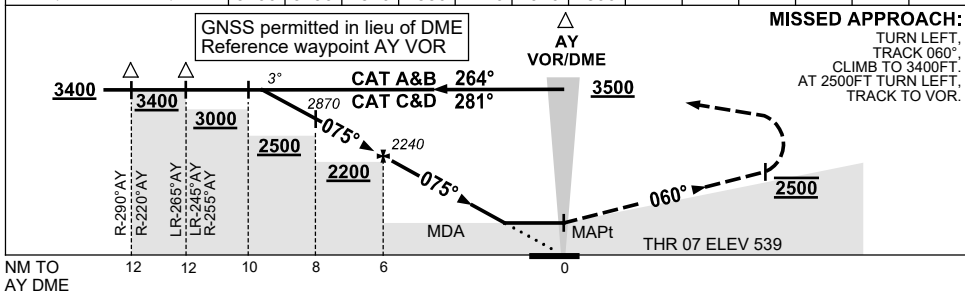[illegible]

1. **COLOUR:** SEE SPEC NOTICES.
2. CIRCLING NOT AVBL WHEN R368 ACT.

CATEGORY	A	B	C	D
S-I VOR/DME	1800 (1261-5.0)			
CIRCLING	2050 (1511-2.4)		2220(1681-4.0)	2270(1731-5.0)
ALTERNATE	(2011-4.4)		(2181-6.0)	(2231-7.0)



MAYVO01-177

USE QNH

VOR RWY 25

ALBURY, NSW (YMAY)

30 NOV 2023

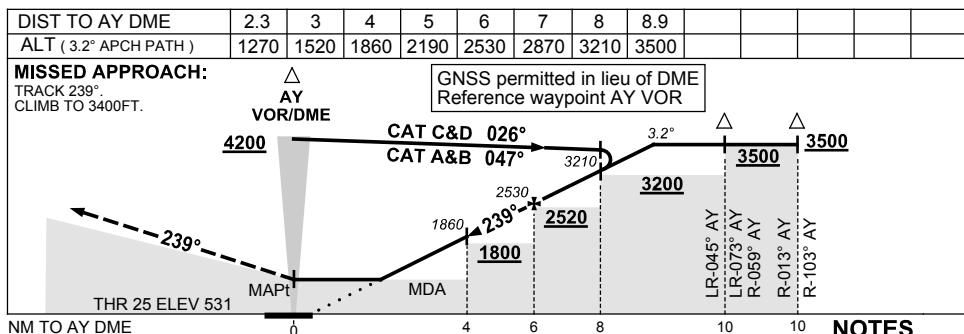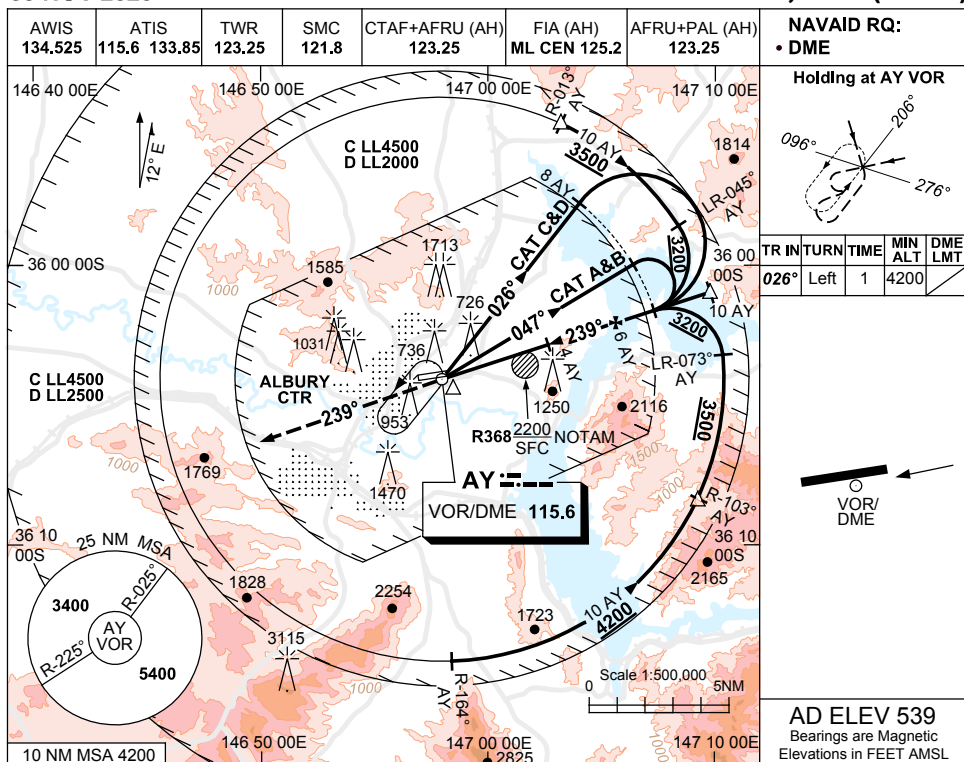

CATEGORY	A	B	C	D
S-I VOR/DME	1270 (739-4.2)			
CIRCLING	2050 (1511-2.4)	2220 (1681-4.0)	2270 (1731-5.0)	
ALTERNATE	(2011-4.4)	(2181-6.0)	(2231-7.0)	

Changes: CIRCLING & ALTERNATE CAT C MINIMA, NEW LOGO.



MAYVO02-177

USE QNH

VOR-A

ALBURY, NSW (YMAY)

30 NOV 2023

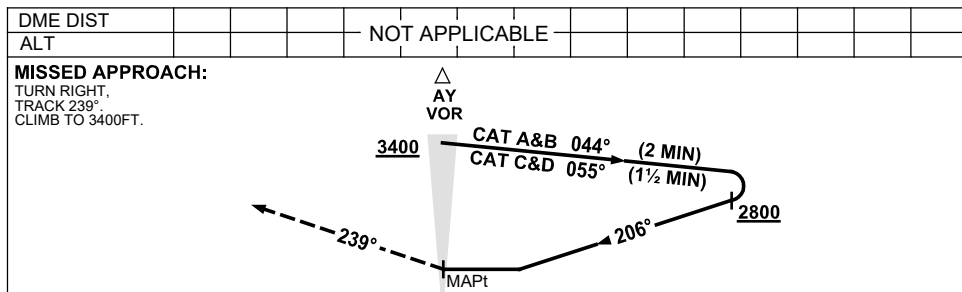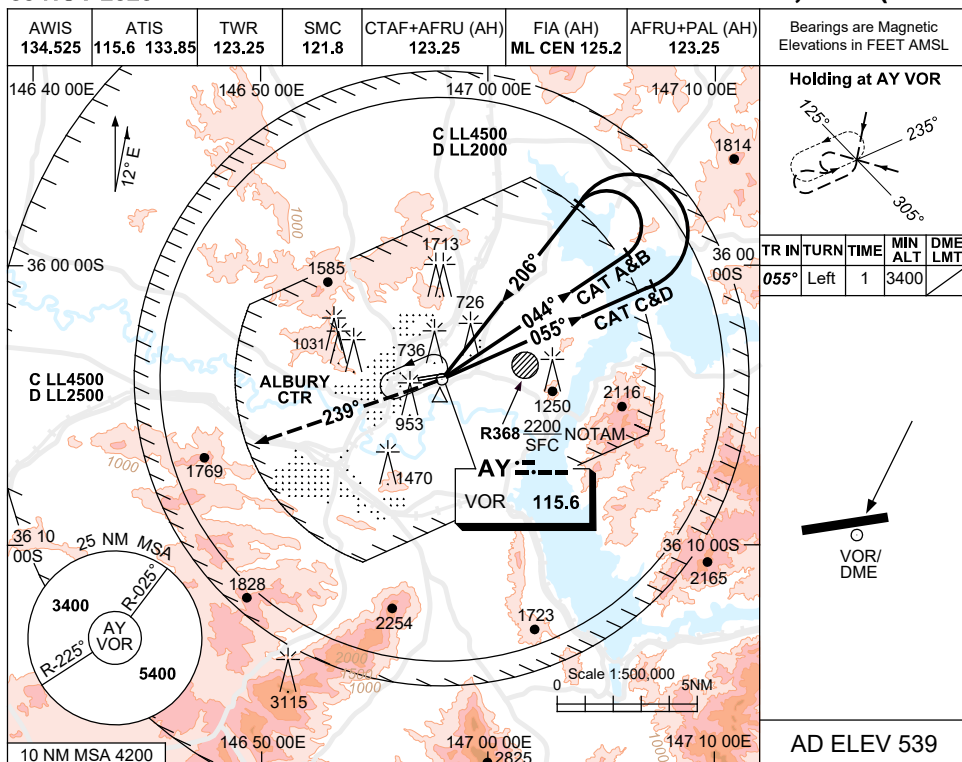

CATEGORY	A	B	C	D
CIRCLING	2050 (1511-2.4)	2220 (1681-4.0)	2270 (1731-5.0)	
ALTERNATE	(2011-4.4)	(2181-6.0)	(2231-7.0)	

Changes: CIRCLING & ALTERNATE CAT C MINIMA, BASE TURN ALTITUDE, NOTE 3, NEW LOGO.

MAYVO03-177