

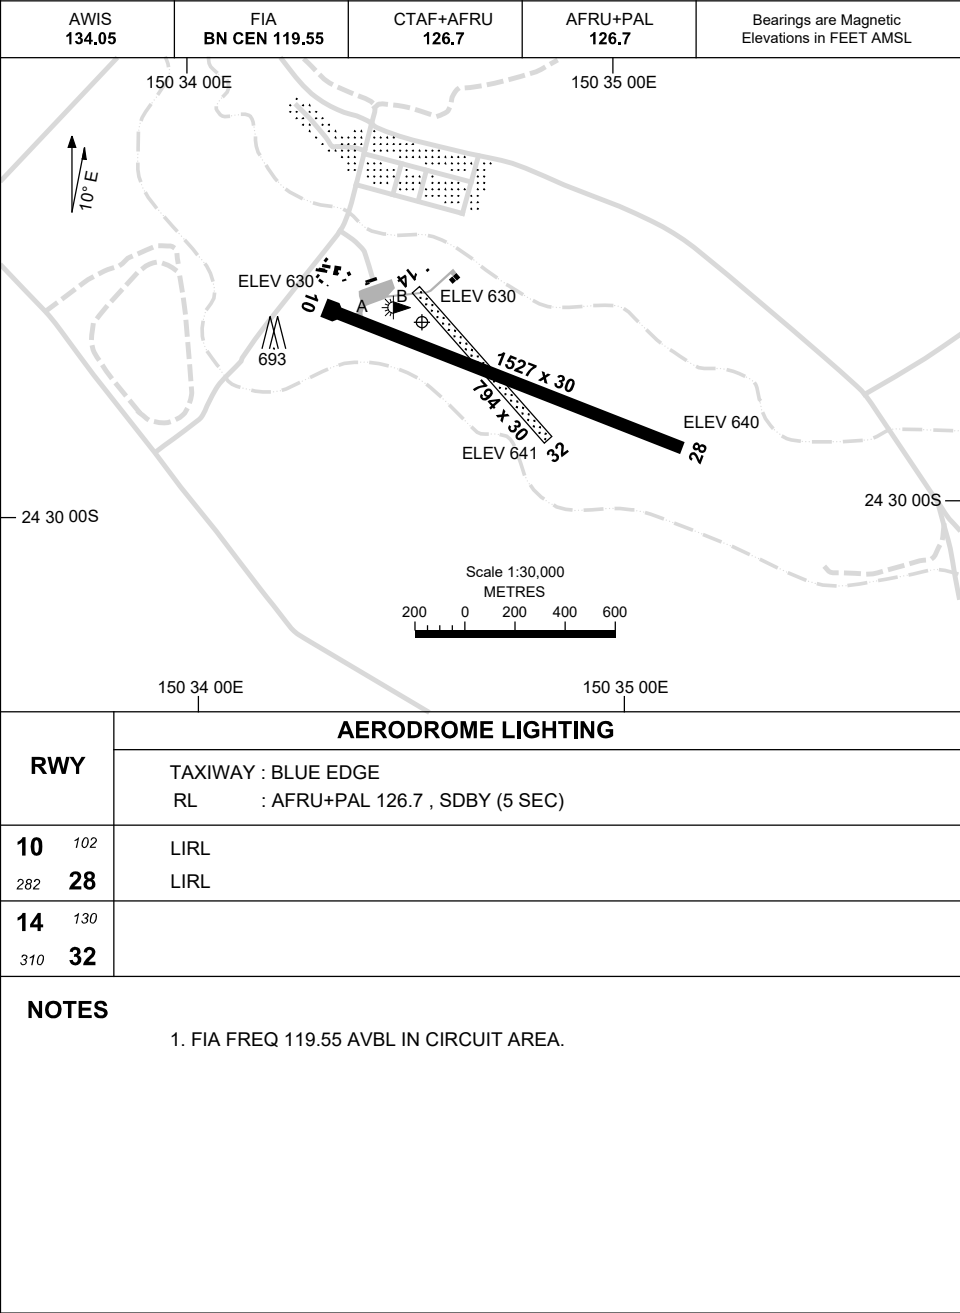


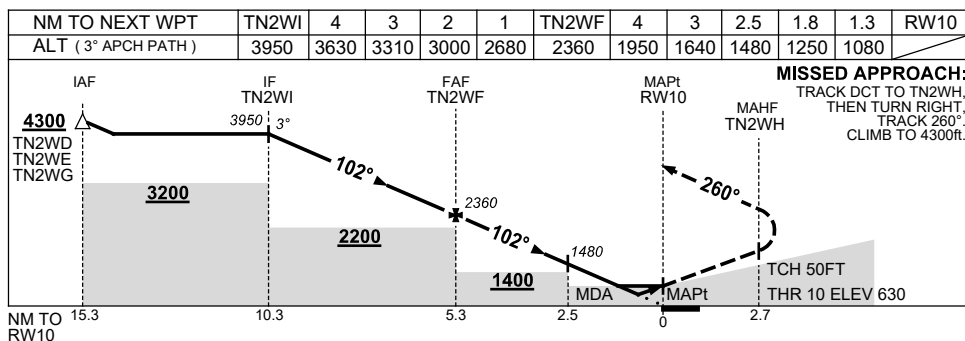

USE QNH

RNP RWY 10
THANGOOL, QLD (YTNG)

13 JUN 2024

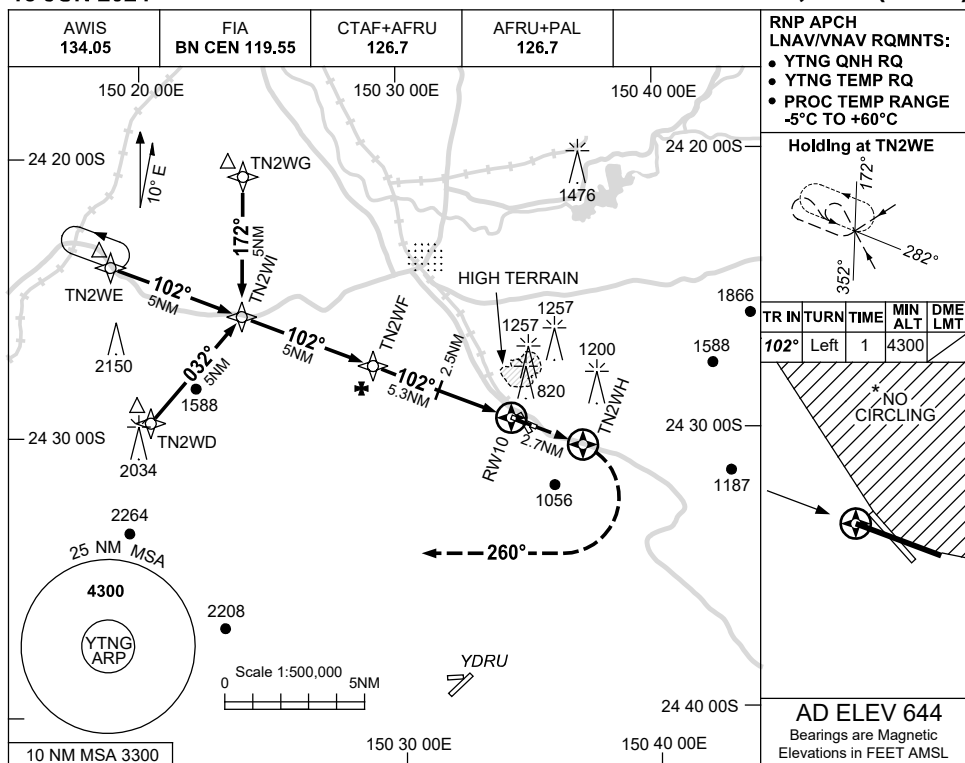

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	1080 (450-2.5)			NOT APPLICABLE
LNAV	1250 (620-3.5)			
CIRCLING*	1700 (1056-2.4)		1800(1156-4.0)	
ALTERNATE	(1556-4.4)		(1656-6.0)	

- MAX IAS:
INITIAL : 210KT.
- NO CIRCLING IN
SECTOR NORTH OF
RWYS 14/32 & 10/28.

Changes: CAT C CIRCLING AND ALTERNATE MINIMA, SEGMENT MINIMA, Editorial.

TNGGN01-179

RNP RWY 28
THANGOOL, QLD (YTNG)

TR	IN	TURN	TIME	MIN	ALT	DME	LMT
282°	Right	1	4300				

* NO CIRCLING

AD ELEV 644

Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	RW28	1.1	1.9	2	3	4	TN2EF	1	2	3	4	TN2EI	
ALT (3° APCH PATH)		1030	1290	1330	1650	1960	2280	2600	2920	3240	3560	3870	

MISSED APPROACH:
 TRACK DCT to TN2EH,
 THEN TRACK 282°. CLIMB TO 4300ft.

MAPt RW28

FAF TN2EF

IF TN2EI

IAF

MAHF TN2EH

282°

282°

282°

3°

4300

3100

2200

1500

1650

2280

3870

TN2EA

TN2EB

TN2EC

TCH 50FT

THR 28 ELEV 640

MAPt

MDA

NM TO RW28

CATEGORY	A	B	C	D
LNAV/VNAV	1030 (390-2.2)			NOT APPLICABLE
LNAV	1290 (646-3.7)			
CIRCLING *	1700 (1056-2.4)		1800 (1156-4.0)	
ALTERNATE	(1556-4.4)		(1656-6.0)	

1. MAX IAS:
INITIAL : 210KT.
- *2. NO CIRCLING IN
SECTOR NORTH OF
RWYS 14/32 & 10/28.

TNGGN02-179