


ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--

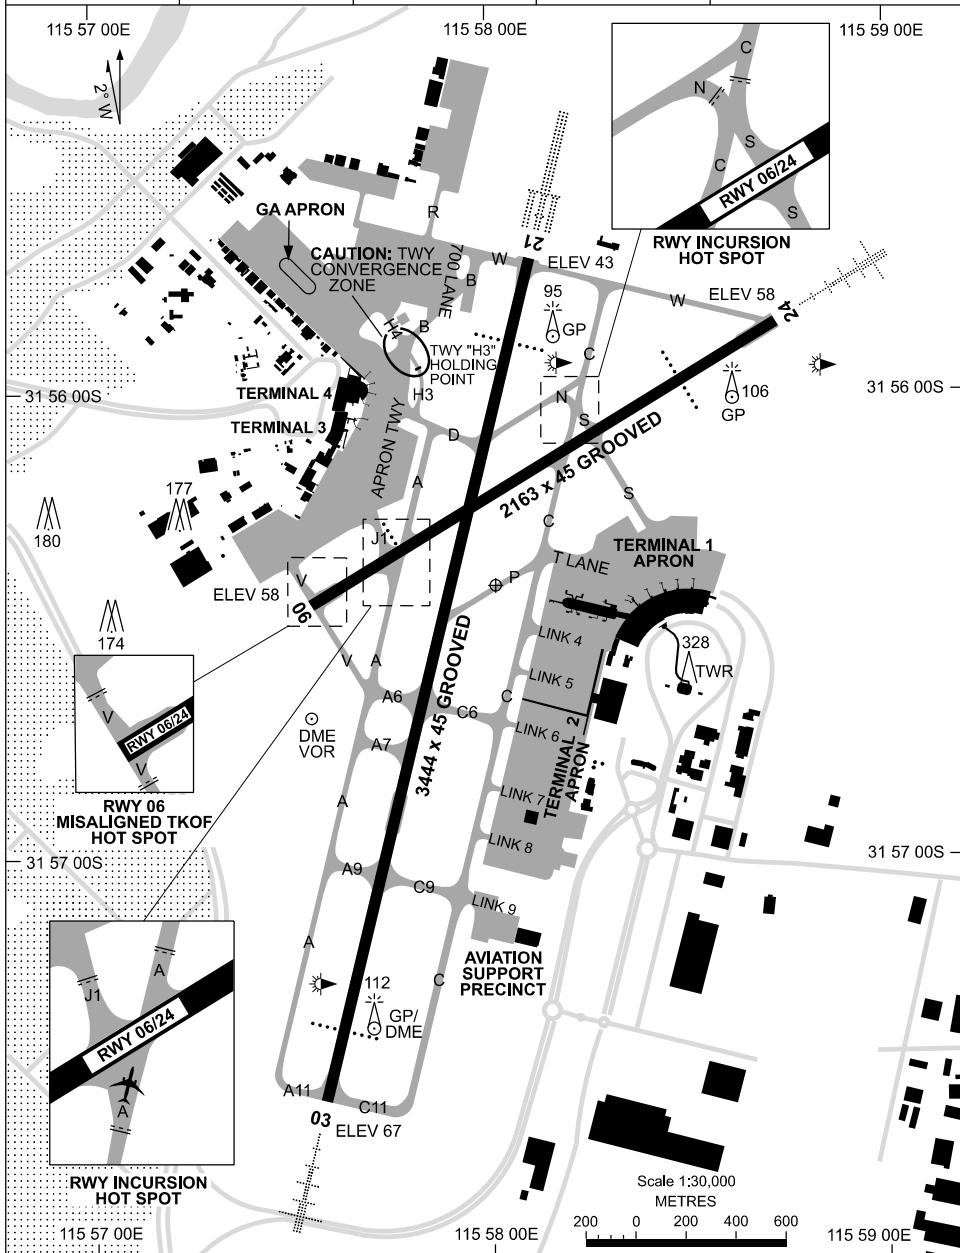

PPHAD01-188

09 JUL 2026

AD ELEV 67
31 56 25S 115 58 01E


AERODROME CHART - Page 2
PERTH, WA (YPPH)

ATIS 113.7 123.8		ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	Bearings are Magnetic Elevations in FEET AMSL
RWY	AERODROME LIGHTING				
	TAXIWAY : GREEN CENTRELINE, RGL, STOP BARS RL : MAN, SDBY (DURING LVP 1 SEC, OTHER TIMES 15 SEC)				
03 016	PAPI BOTH SIDES 3.0° 71FT HIRL MIRL HIAL - CAT I RCLL RVR				
196 21	PAPI BOTH SIDES 3.0° 71FT HIRL MIRL HIAL - CAT III RTZL RCLL RVR				
06 061	PAPI LEFT SIDE 3.0° 64FT HIRL MIRL				
241 24	PAPI BOTH SIDES 3.0° 71FT HIRL MIRL HIAL - CAT I				
NOTES					
1. CAUTION: RWY 03/21 GLIDEPATH FALSE INDICATIONS POSSIBLE DUE ACFT LINING UP FM THE EAST ON TWY W AND TWY C11.					

AERODROME GROUND MOVEMENT CHART - PAGE 1

PERTH, WA (YPPH)

19 MAR 2026

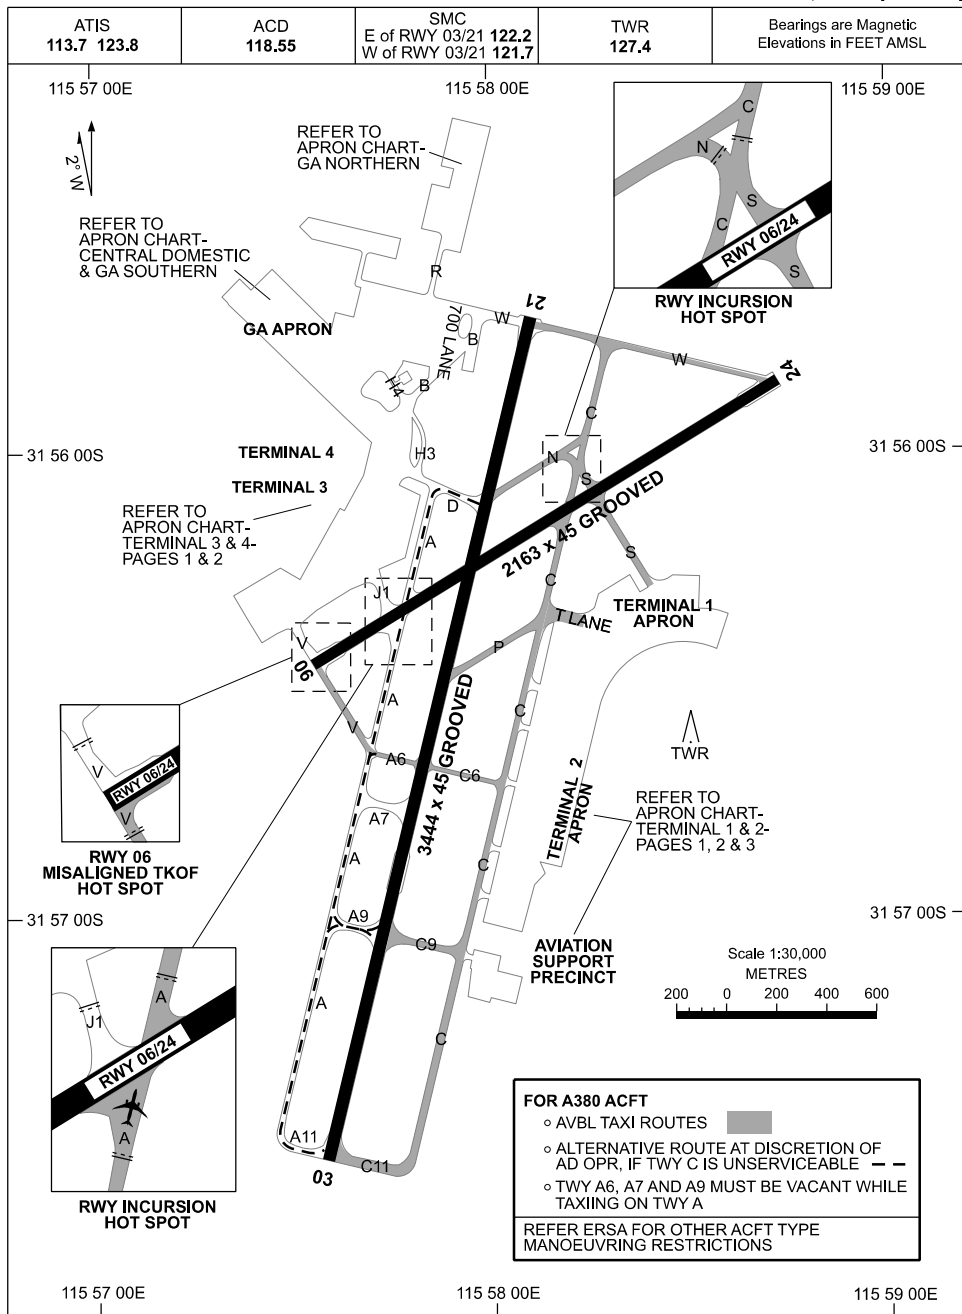


Changes: AVIATION SUPPORT PRECINCT LABEL ADDED, Editorial.

PPHAG01-186

AERODROME GROUND MOVEMENT CHART - PAGE 2 PERTH, WA (YPPH)

19 MAR 2026

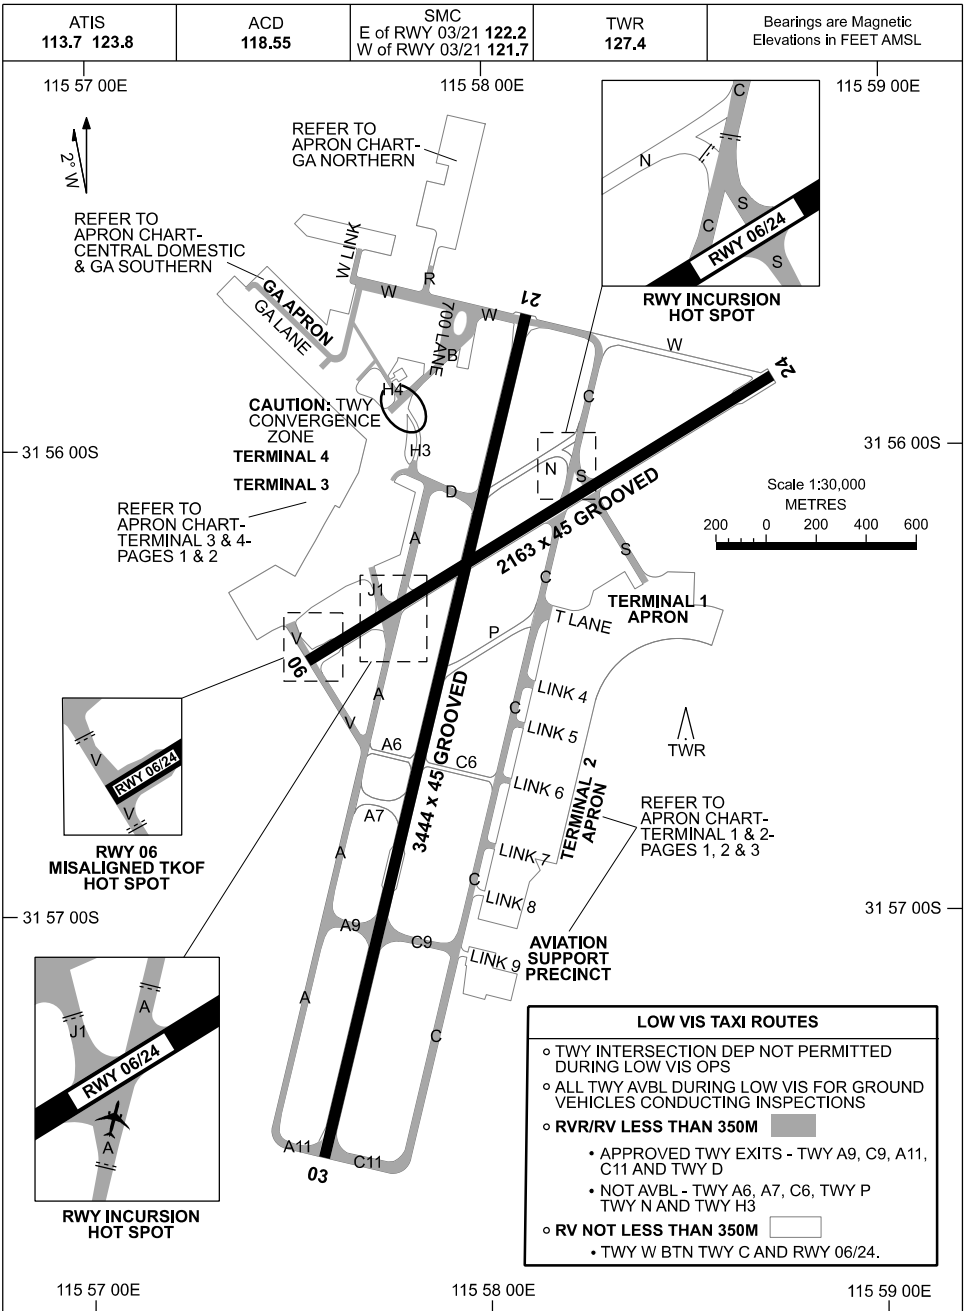


Changes: AVIATION SUPPORT PRECINCT LABEL ADDED, Editorial.


PPHAG02-186

12 JUN 2025

PERTH, WA (YPPH)

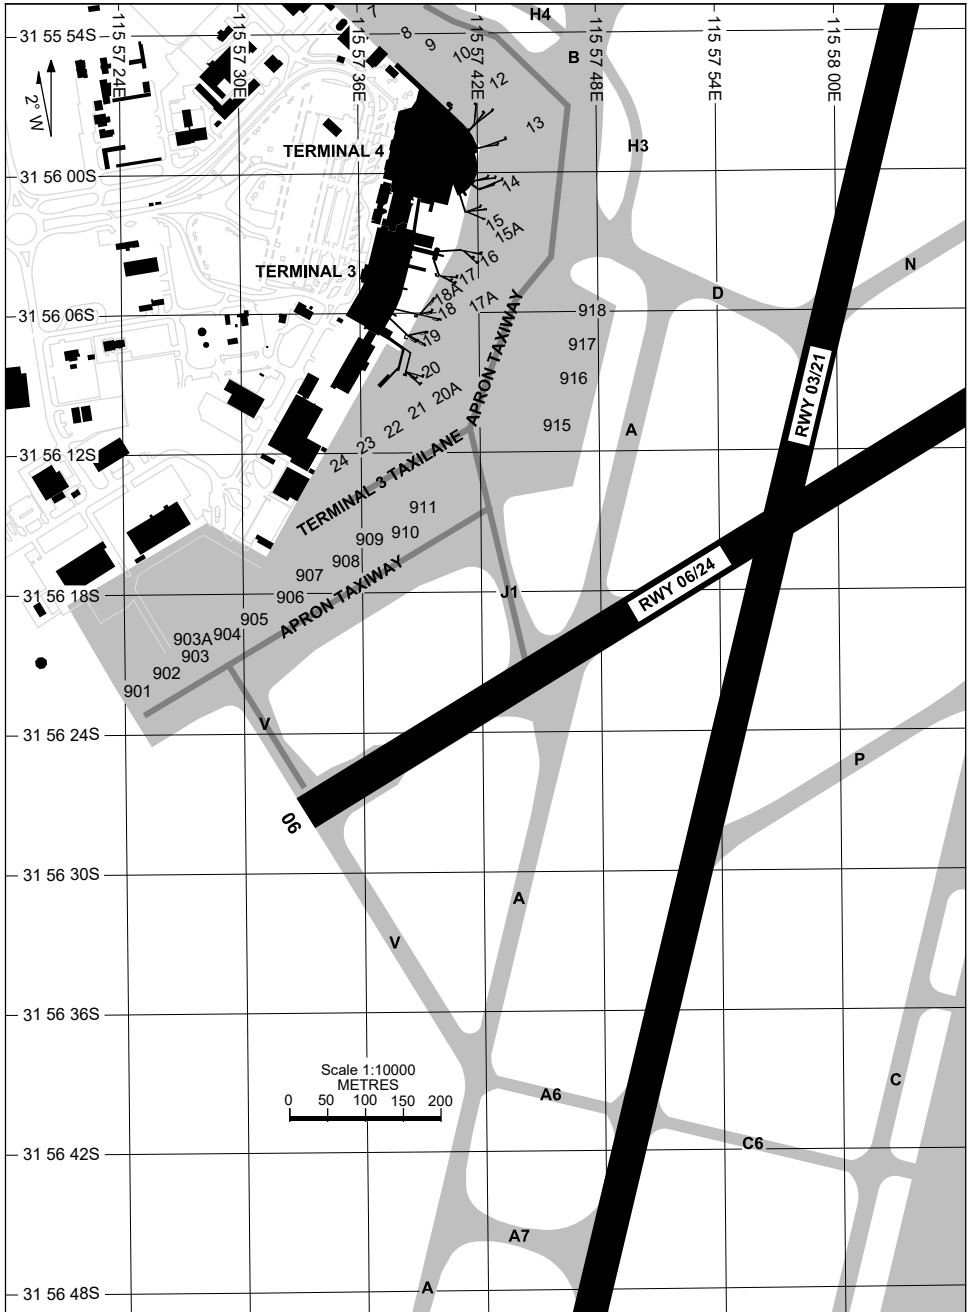


03 SEP 2026

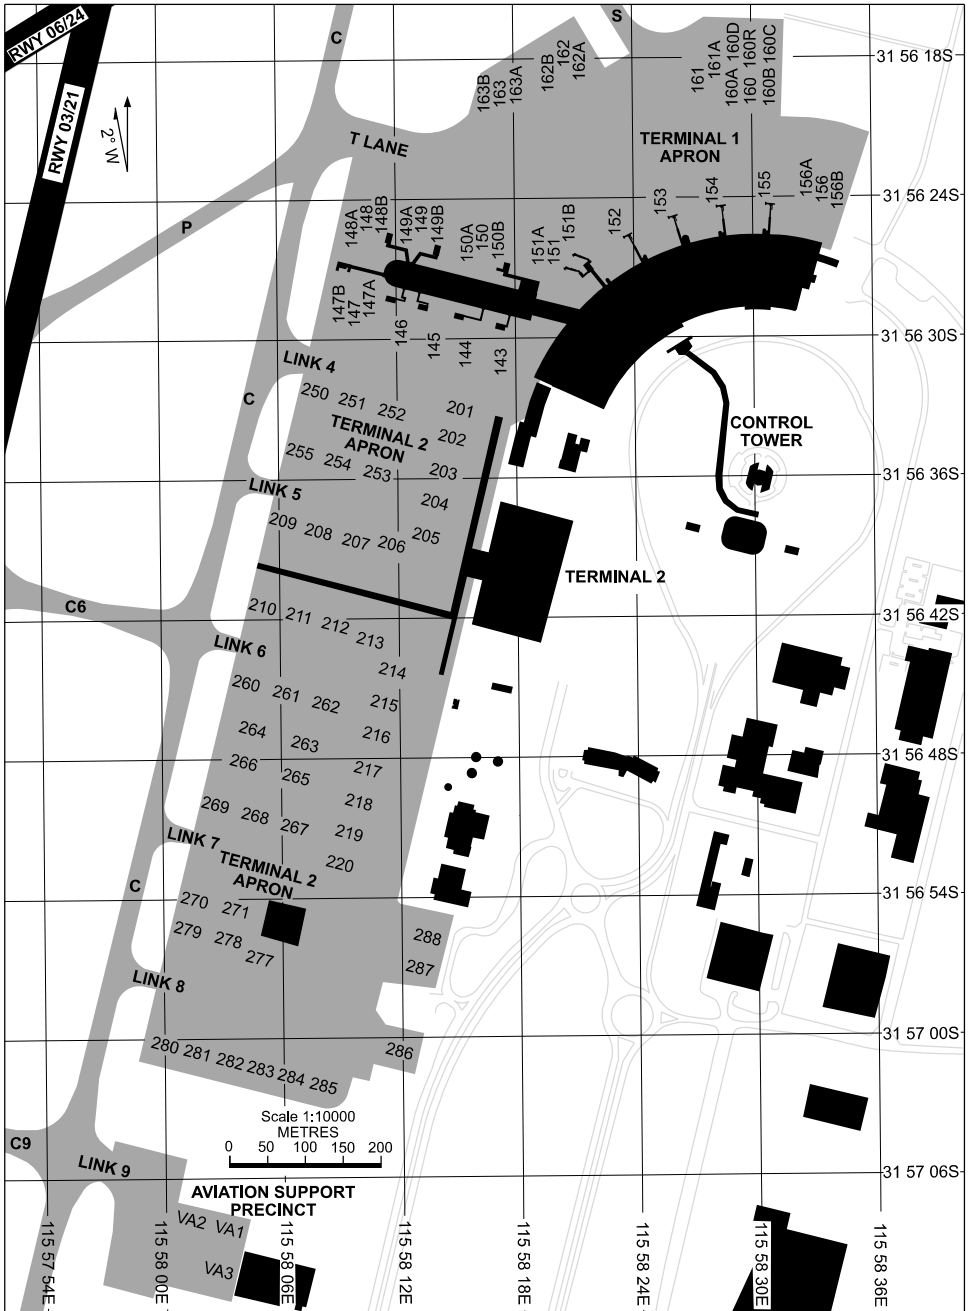

APRON CHART - CENTRAL DOMESTIC AND GA SOUTHERN PERTH, WA (YPPH)

09 JUL 2026

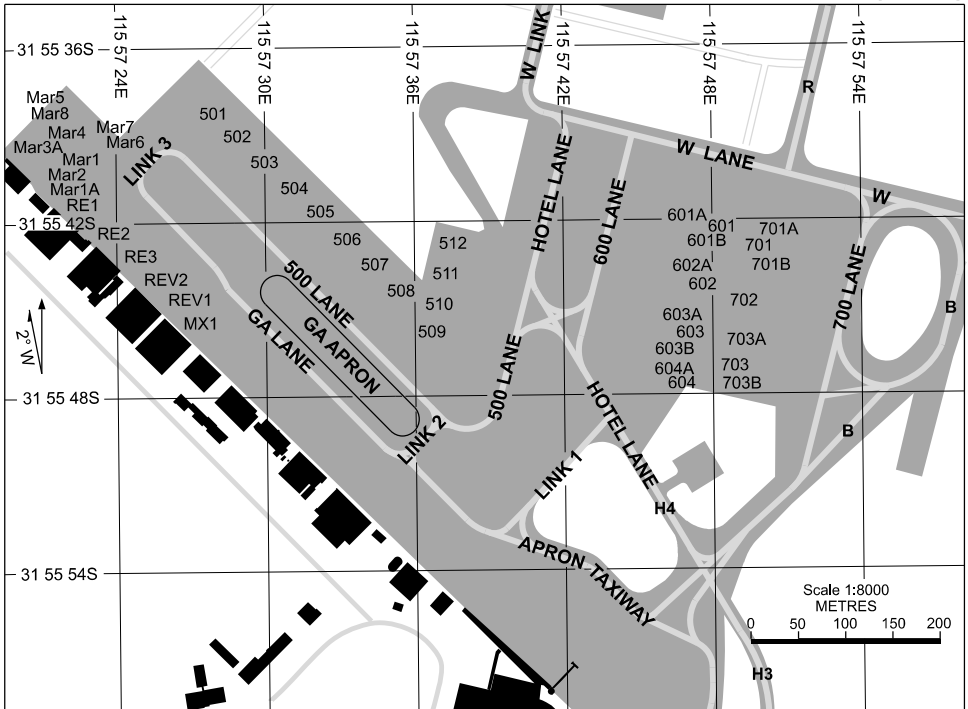

PARKING POSITION INFORMATION

STAND	CO-ORDINATES	ELEV (ft)	CAPACITY	STAND	CO-ORDINATES	ELEV (ft)	CAPACITY
Maroomba 1	31 55 40.77S 115 57 21.46E	37	H25B	701	31 55 42.52S 115 57 49.32E	41	A333/B789
Maroomba 1A	31 55 41.10S 115 57 21.53E	37	H25B	701A	31 55 42.23S 115 57 50.04E	41	A21N/B738
Maroomba 2	31 55 40.16S 115 57 22.11E	36	H25B	701B	31 55 43.42S 115 57 49.27E	41	A21N/B738
Maroomba 3A	31 55 39.49S 115 57 20.24E	36	DH8A	702	31 55 44.65S 115 57 48.70E	41	A333/B789
Maroomba 4	31 55 39.18S 115 57 21.51E	35	DH8A	703	31 55 46.76S 115 57 47.88E	41	A333/A35K
Maroomba 5	31 55 38.05S 115 57 21.93E	34	DH8A	703A	31 55 45.97S 115 57 48.53E	41	A21N/B738
Maroomba 6	31 55 39.41S 115 57 23.78E	35	H25B	703B	31 55 47.34S 115 57 48.56E	41	A21N/B738
Maroomba 7	31 55 38.96S 115 57 23.26E	35	H25B				
Maroomba 8	31 55 38.50S 115 57 22.74E	34	H25B				
501	31 55 37.97S 115 57 27.87E	37	A321/B738	RE1	31 55 41.34S 115 57 22.22E	37	GLF6/GLEX
502	31 55 38.90S 115 57 28.95E	38	A321/B738	RE2	31 55 42.31S 115 57 23.36E	37	GLF6/GLEX
503	31 55 39.83S 115 57 30.03E	38	A321/B378	RE3	31 55 41.89S 115 57 22.71E	37	GLF6/GLEX
504	31 55 40.76S 115 57 31.11E	39	E170				
505	31 55 41.68S 115 57 32.20E	39	A321/B738	REV1	31 55 44.43S 115 57 26.12E	38	GLEX
506	31 55 42.61S 115 57 33.28E	40	A321/B738	REV2	31 55 43.88S 115 57 25.55E	39	B737
507	31 55 43.54S 115 57 34.36E	40	A321/B738	MX1	31 55 45.51S 115 57 26.87E	39	C550/C560
508	31 55 44.55S 115 57 35.35E	41	A319/B712				
509	31 55 46.64S 115 57 37.16E	41	B738				
510	31 55 45.30S 115 57 37.37E	41	B738				
511	31 55 44.05S 115 57 37.73E	41	B712				
512	31 55 42.91S 115 57 38.07E	41	B712				
601	31 55 42.02S 115 57 47.87E	41	B744				
601A	31 55 41.67S 115 57 46.95E	41	B738				
601B	31 55 42.58S 115 57 47.75E	42	A21N/B738				
602	31 55 44.27S 115 57 47.02E	42	A333				
602A	31 55 43.58S 115 57 46.92E	42	A21N/B738				
603	31 55 45.88S 115 57 46.32E	42	A21N/B738				
603A	31 55 45.30S 115 57 46.60E	42	A21N/B738				
603B	31 55 46.59S 115 57 46.53E	42	B744				
604	31 55 47.24S 115 57 46.09E	42	A21N/B738				
604A	31 55 47.12S 115 57 46.47E	42	A21N/B738				

Changes: AMD STAND COORD MAROOMBA 2, 3A, 4, AND 5, DELETE MAROOMBA 5A, Editorial.

PPHAP03-187

09 JUL 2026

PERTH, WA (YPPH)

PARKING POSITION INFORMATION						
STAND	CO-ORDINATES		ELEV (ft)	CAPACITY	HYDRANT FUEL	DOCKING SYSTEM
143	31 56 30.66S	115 58 17.96E	62	B38M/B738	JET A1	A-VDGS
144	31 56 29.88S	115 58 15.90E	61	B38M/B738	JET A1	A-VDGS
145	31 56 29.50S	115 58 14.11E	60	B38M/B738	JET A1	A-VDGS
146	31 56 29.16S	115 58 12.50E	60	B38M/B738	JET A1	A-VDGS
147	31 56 27.97S	115 58 10.27E	60	A333	JET A1	A-VDGS
147A	31 56 28.13S	115 58 10.60E	60	B38M/B738	JET A1	A-VDGS
147B	31 56 28.43S	115 58 09.15E	60	B38M/B738	JET A1	A-VDGS
148	31 56 25.37S	115 58 10.47E	60	A333	JET A1	A-VDGS
148A	31 56 25.63S	115 58 10.21E	60	E190	JET A1	A-VDGS
148B	31 56 24.55S	115 58 11.11E	60	B38M/B738	JET A1	A-VDGS
149	31 56 25.97S	115 58 13.10E	61	A333	JET A1	A-VDGS
149A	31 56 25.90S	115 58 12.78E	61	B38M/B738	JET A1	A-VDGS
149B	31 56 25.00S	115 58 14.15E	60	E190	JET A1	A-VDGS
150	31 56 26.64S	115 58 16.10E	62	A388	JET A1	A-VDGS
150A	31 56 26.79S	115 58 15.95E	62	A321/B38M	JET A1	A-VDGS
150B	31 56 25.89S	115 58 17.16E	61	B38M/B738	JET A1	A-VDGS
151	31 56 27.17S	115 58 20.15E	62	A388	JET A1	A-VDGS
151A	31 56 27.37S	115 58 19.92E	62	A321/B38M	JET A1	A-VDGS
151B	31 56 25.94S	115 58 20.60E	62	A321/B38M	JET A1	A-VDGS
152	31 56 26.22S	115 58 23.68E	60	B744	JET A1	A-VDGS
153	31 56 25.19S	115 58 25.83E	63	B779	JET A1	A-VDGS
154	31 56 24.90S	115 58 28.19E	60	B778	JET A1	A-VDGS
155	31 56 24.77S	115 58 30.58E	63	B744	JET A1	A-VDGS
156	31 56 24.90S	115 58 33.04E	63	B744	JET A1	MARSHALLER
156A	31 56 24.26S	115 58 33.08E	63	A21N/B38M	JET A1	MARSHALLER
156B	31 56 24.58S	115 58 34.17E	63	A21N/B38M	JET A1	MARSHALLER
160	31 56 19.04S	115 58 30.28E	58	B744	NIL	MARSHALLER
160A	31 56 19.33S	115 58 29.59E	59	B734/GLEX	NIL	MARSHALLER
160B	31 56 19.38S	115 58 31.13E	59	B734/GLEX	NIL	MARSHALLER
160C	31 56 17.50S	115 58 30.26E	58	GLEX	NIL	MARSHALLER
160D	31 56 17.44S	115 58 28.28E	57	B734/GLEX	NIL	MARSHALLER
160R	31 56 17.13S	115 58 30.37E	57	B744	NIL	MARSHALLER
161	31 56 18.59S	115 58 27.53E	58	B744	NIL	MARSHALLER
161A	31 56 17.87S	115 58 27.98E	57	B744	NIL	MARSHALLER
162	31 56 17.35S	115 58 20.13E	56	A388	NIL	MARSHALLER
162A	31 56 17.76S	115 58 21.15E	56	A21N/B3XM	NIL	MARSHALLER
162B	31 56 18.23S	115 58 19.65E	56	A21N/B3XM	NIL	MARSHALLER
163	31 56 20.42S	115 58 18.12E	57	A388	NIL	MARSHALLER
163A	31 56 19.76S	115 58 18.61E	57	A21N/B3XM	NIL	MARSHALLER
163B	31 56 20.26S	115 58 16.99E	56	A21N/B3XM	NIL	MARSHALLER

Changes: AMD STAND CAPACITY 156A-B, 162A-B, 163A-B.

PPHAP05-187

27 NOV 2025

PERTH, WA (YPPH)

PARKING POSITION INFORMATION					
STAND	CO-ORDINATES	ELEV (ft)	CAPACITY	HYDRANT FUEL	DOCKING SYSTEM
7	31 55 53.63S 115 57 36.63E	42	B738	NIL	MARSHALLER
8	31 55 54.73S 115 57 38.17E	42	A321/B738	JET A1	MARSHALLER
9	31 55 55.49S 115 57 39.35E	43	A321/B738	JET A1	MARSHALLER
10	31 55 55.86S 115 57 41.04E	44	A21N/B738	JET A1	MARSHALLER
12	31 55 57.23S 115 57 42.03E	44	A333	JET A1	A-VDGS
13	31 55 58.61S 115 57 42.87E	45	A333	JET A1	A-VDGS
14	31 56 00.10S 115 57 42.77E	47	A333	JET A1	A-VDGS
15	31 56 01.62S 115 57 42.23E	48	A21N/B738	JET A1	A-VDGS
15A	31 56 01.97S 115 57 42.14E	48	A333	JET A1	MARSHALLER
16	31 56 03.57S 115 57 41.96E	48	A21N/B738	JET A1	A-VDGS
17	31 56 04.57S 115 57 40.85E	48	A21N/B738	JET A1	A-VDGS
17A	31 56 04.36S 115 57 40.88E	48	B789	JET A1	A-VDGS
18	31 56 06.01S 115 57 40.29E	49	A21N/B738	JET A1	A-VDGS
18A	31 56 05.89S 115 57 39.75E	49	B789	JET A1	A-VDGS
19	31 56 07.08S 115 57 39.18E	49	A21N/B738	JET A1	A-VDGS
20	31 56 08.71S 115 57 39.21E	47	A21N/B738	JET A1	A-VDGS
20A	31 56 08.49S 115 57 39.16E	47	B789	JET A1	A-VDGS
21	31 56 10.01S 115 57 38.46E	47	A321/B738	JET A1	A-VDGS
22	31 56 10.72S 115 57 37.52E	48	A21N/B738	JET A1	A-VDGS
23	31 56 11.45S 115 57 36.11E	48	A321/B738	JET A1	A-VDGS
24	31 56 12.11S 115 57 35.06E	48	A321/B738	JET A1	A-VDGS
901	31 56 22.15S 115 57 24.58E	53	A21N/B738	NIL	MARSHALLER
902	31 56 21.38S 115 57 26.07E	52	A21N/B738	NIL	MARSHALLER
903	31 56 20.62S 115 57 27.56E	52	A21N/B738	NIL	MARSHALLER
903A	31 56 19.93S 115 57 28.10E	52	A332	NIL	MARSHALLER
904	31 56 19.79S 115 57 29.02E	52	B738	NIL	MARSHALLER
905	31 56 18.91S 115 57 30.32E	51	B738	NIL	MARSHALLER
906	31 56 18.19S 115 57 31.74E	51	B738	NIL	MARSHALLER
907	31 56 17.31S 115 57 33.16E	51	A21N/B738	NIL	MARSHALLER
908	31 56 16.65S 115 57 34.73E	51	B738	NIL	MARSHALLER
909	31 56 15.87S 115 57 36.23E	51	B738	NIL	MARSHALLER
910	31 56 15.10S 115 57 37.73E	51	B738	NIL	MARSHALLER
911	31 56 14.33S 115 57 39.23E	51	B738	NIL	MARSHALLER
915	31 56 11.19S 115 57 46.58E	50	A333	NIL	MARSHALLER
916	31 56 09.06S 115 57 47.19E	49	A333	NIL	MARSHALLER
917	31 56 07.75S 115 57 47.62E	49	A21N/B738	NIL	MARSHALLER
918	31 56 06.43S 115 57 48.07E	47	B738	NIL	MARSHALLER

Changes: AMD STAND CAPACITY 10, 16, 17, 18, 19, 20, 22.

PPHAP06-185

03 SEP 2026

PERTH, WA (YPPH)

PARKING POSITION INFORMATION

STAND	CO-ORDINATES	ELEV (ft)	CAPACITY	HYDRANT FUEL	DOCKING SYSTEM
201	31 56 33.70S 115 58 16.14E	62	A21N/B38M	JET A1	MARSHALLER
202	31 56 35.02S 115 58 15.75E	62	A21N/B38M	JET A1	MARSHALLER
203	31 56 36.39S 115 58 15.35E	62	A21N/B38M	JET A1	MARSHALLER
204	31 56 37.77S 115 58 14.96E	62	A21N/B38M	JET A1	MARSHALLER
205	31 56 39.28S 115 58 14.49E	62	A21N/B38M	JET A1	MARSHALLER
206	31 56 40.05S 115 58 10.94E	62	A21N/B38M	JET A1	MARSHALLER
207	31 56 39.71S 115 58 09.34E	62	A21N/B38M	JET A1	MARSHALLER
208	31 56 39.37S 115 58 07.73E	62	A21N/B38M	JET A1	MARSHALLER
209	31 56 39.03S 115 58 06.12E	61	A21N/B38M	JET A1	MARSHALLER
210	31 56 41.01S 115 58 05.55E	61	A21N/B38M	JET A1	MARSHALLER
211	31 56 41.35S 115 58 07.16E	62	A21N/B38M	JET A1	MARSHALLER
212	31 56 41.69S 115 58 08.76E	62	A21N/B38M	JET A1	MARSHALLER
213	31 56 42.03S 115 58 10.37E	62	A21N/B38M	JET A1	MARSHALLER
214	31 56 44.09S 115 58 13.11E	63	A321/B738	JET A1	MARSHALLER
215	31 56 45.62S 115 58 12.66E	63	A21N/B38M	JET A1	MARSHALLER
216	31 56 46.99S 115 58 12.27E	63	A21N/B38M	JET A1	MARSHALLER
217	31 56 48.36S 115 58 11.87E	63	A21N/B38M	JET A1	MARSHALLER
218	31 56 49.73S 115 58 11.47E	63	A21N/B38M	JET A1	MARSHALLER
219	31 56 51.10S 115 58 11.07E	63	A21N/B38M	JET A1	MARSHALLER
220	31 56 52.47S 115 58 10.67E	63	A21N/B38M	JET A1	MARSHALLER
250	31 56 33.76S 115 58 07.83E	58	A21N/B38M	NIL	MARSHALLER
251	31 56 34.10S 115 58 09.44E	60	A21N/B38M	NIL	MARSHALLER
252	31 56 34.44S 115 58 11.04E	59	A21N/B38M	NIL	MARSHALLER
253	31 56 35.34S 115 58 10.79E	59	A21N/B38M	NIL	MARSHALLER
254	31 56 35.00S 115 58 09.18E	58	A21N/B38M	NIL	MARSHALLER
255	31 56 34.66S 115 58 07.57E	59	A21N/B38M	NIL	MARSHALLER
260	31 56 45.75S 115 58 04.20E	59	A21N/B38M	NIL	MARSHALLER
261	31 56 46.09S 115 58 05.78E	59	A21N/B38M	NIL	MARSHALLER
262	31 56 46.43S 115 58 07.37E	60	A21N/B38M	NIL	MARSHALLER
263	31 56 47.32S 115 58 06.27E	61	A21N/B38M	NIL	MARSHALLER
264	31 56 46.82S 115 58 03.89E	59	A21N/B38M	NIL	MARSHALLER
265	31 56 48.69S 115 58 05.87E	61	A21N/B38M	NIL	MARSHALLER
266	31 56 48.19S 115 58 03.49E	59	A21N/B38M	NIL	MARSHALLER
267	31 56 49.93S 115 58 06.36E	60	A21N/B38M/SF34	NIL	PILOT STOP BAR
268	31 56 49.60S 115 58 04.77E	61	A21N/B38M/SF34	NIL	PILOT STOP BAR
269	31 56 49.26S 115 58 03.18E	59	A21N/B38M/SF34	NIL	PILOT STOP BAR
270	31 56 54.10S 115 58 01.85E	60	A21N/B3XM	NIL	MARSHALLER
271	31 56 54.41S 115 58 03.43E	61	A21N/B3XM	NIL	MARSHALLER
277	31 56 56.50S 115 58 04.49E	61	A20N	NIL	MARSHALLER
278	31 56 55.69S 115 58 03.05E	61	A21N/B3XM	NIL	MARSHALLER
279	31 56 55.36S 115 58 01.48E	60	A21N/B3XM	NIL	MARSHALLER
280	31 57 00.23S 115 58 00.06E	60	A21N/B3XM	NIL	MARSHALLER
281	31 57 00.56S 115 58 01.64E	61	A21N/B3XM	NIL	MARSHALLER
282	31 57 00.89S 115 58 03.21E	62	A21N/B3XM	NIL	MARSHALLER
283	31 57 01.18S 115 58 04.81E	62	A21N/B3XM	NIL	MARSHALLER
284	31 57 01.51S 115 58 06.38E	63	A21N/B3XM	NIL	MARSHALLER
285	31 57 01.85S 115 58 07.95E	64	A21N/B3XM	NIL	MARSHALLER
286	31 57 00.57S 115 58 11.87E	66	A21N/B3XM	NIL	MARSHALLER
287	31 56 56.99S 115 58 12.91E	67	A21N/B3XM	NIL	MARSHALLER
288	31 56 55.65S 115 58 13.30E	67	A21N/B3XM	NIL	MARSHALLER
VA1	31 57 07.83S 115 58 02.96E	60	B3XM	NIL	MARSHALLER
VA2	31 57 07.49S 115 58 01.35E	59	B3XM	NIL	MARSHALLER
VA3	31 57 10.07S 115 58 03.11E	62	B3XM	NIL	MARSHALLER

Changes: FROM SUP H45/26.

PPHAP07-188

03 SEP 2026


PARKING POSITION INFORMATION

STAND	CO-ORDINATES		ELEV (ft)	CAPACITY	HYDRANT FUEL	DOCKING SYSTEM
NT1	31 55 17.93S	115 57 55.08E	36	E190	NIL	MARSHALLER
NT1R	31 55 18.18S	115 57 56.28E	36	E190	NIL	MARSHALLER
PJ1	31 55 19.95S	115 57 55.91E	36	B190	NIL	MARSHALLER
PJ2	31 55 19.81S	115 57 55.25E	36	B190	NIL	MARSHALLER
PJ3	31 55 19.64S	115 57 54.14E	37	B190	NIL	MARSHALLER
AF1	31 55 20.54S	115 57 55.83E	36	CL60	NIL	MARSHALLER
AF2	31 55 21.35S	115 57 53.69E	37	GL7T/GLEX	NIL	MARSHALLER
AF3	31 55 19.94S	115 57 54.08E	37	GL7T/GLEX	NIL	MARSHALLER
AF4	31 55 22.41S	115 57 54.72E	36	B738	NIL	MARSHALLER
AF5	31 55 22.76S	115 57 53.72E	37	A21N	NIL	MARSHALLER

STANDARD INSTRUMENT DEPARTURES (SID)
PERTH SEVEN DEPARTURE (RADAR)
PERTH, WA (YPPH)

7 SEP 2023

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

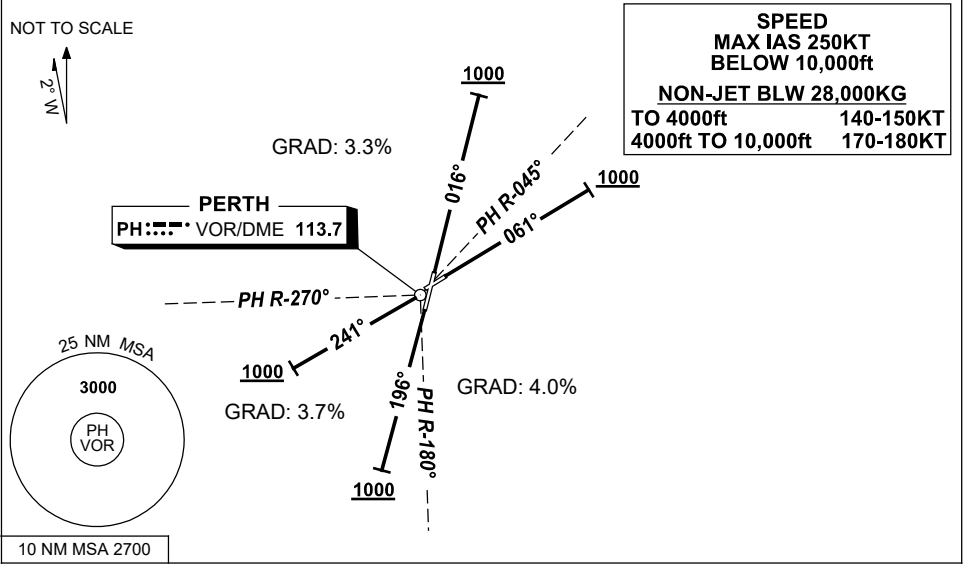

PERTH SEVEN DEPARTURE (RADAR)

RWY 03

- Track 016°
- AT 1000ft but not before DER
- turn to Assigned Heading or track
- Contact Departures for Radar Vectors

RWY 06

- Track 061°
- AT 1000ft but not before DER
- turn to Assigned Heading or track
- Contact Departures for Radar Vectors

RWY 21

- Track 196°
- AT 1000ft but not before DER
- turn to Assigned Heading or track
- Contact Departures for Radar Vectors

RWY 24

- Track 241°
- AT 1000ft but not before DER
- turn to Assigned Heading or track
- Contact Departures for Radar Vectors

COMMUNICATIONS FAILURE : PROCEDURE IN IMC

- On recognition of communication failure.
- Squawk 7600.
 - Maintain last assigned vector for 2 minutes, and
 - CLIMB IF NECESSARY TO MINIMUM SAFE ALTITUDE, to maintain terrain clearance, then
 - Proceed in accordance with the latest ATC route clearance acknowledged.

Changes: RWY 06/24 INITIAL TRACKS.

PPHPD01-176

STANDARD INSTRUMENT DEPARTURES (SID)
EKEPO ONE (RNAV)
PERTH, WA (YPPH)

04 SEP 2025



ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

NOT TO SCALE



SPEED
MAX IAS 250KT
BELOW 10,000ft

RNP1

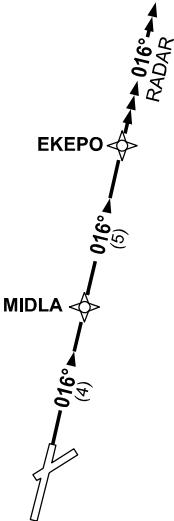

10 NM MSA 2700

EKEPO ONE DEPARTURE


- RWY 03**
GRAD 3.3%
- Track 016° to MIDLA
 - Track 016° to EKEPO
 - At EKEPO continue tracking 016°
 - Expect radar vectors to cleared route

**STANDARD INSTRUMENT DEPARTURES (SID)
AMANA FIVE (JET) (RNAV)
PERTH, WA (YPPH)**

13 JUN 2024

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

NOT TO SCALE

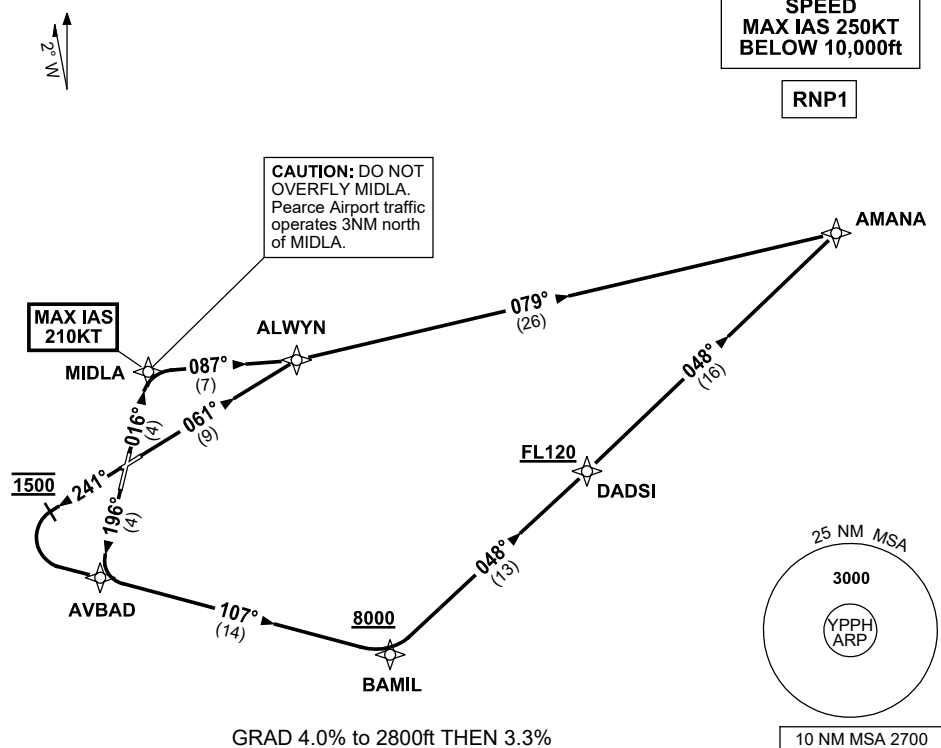

AMANA FIVE DEPARTURE (JET)

RWY 03

MAX IAS 210KT until MIDLA

- Track 016° to MIDLA,
- Turn RIGHT, track 087° to ALWYN,
- Turn LEFT, track 079° to AMANA, then as cleared

RWY 06

- Track 061° to ALWYN,
- Turn RIGHT, track 079° to AMANA, then as cleared

RWY 21

- Track 196° to AVBAD

RWY 24

- Track 241°
- AT 1500ft turn LEFT,
- Track DCT to AVBAD

From AVBAD

- Track 107° to BAMIL
Cross BAMIL AT or ABV 8000ft
- Turn LEFT, track 048° to DADSI,
Cross DADSI AT or ABV FL120,
- Track 048° to AMANA, then as cleared


Changes: DADSI REPLACES HELNA, VALIDITY INDICATOR.

PPHDP03-179

STANDARD INSTRUMENT DEPARTURES (SID) HECTO FIVE, MEMUP FIVE, MUBID FOUR, YNRV FIVE (JET) (RNAV) PERTH, WA (YPPH)

5 SEP 2024

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

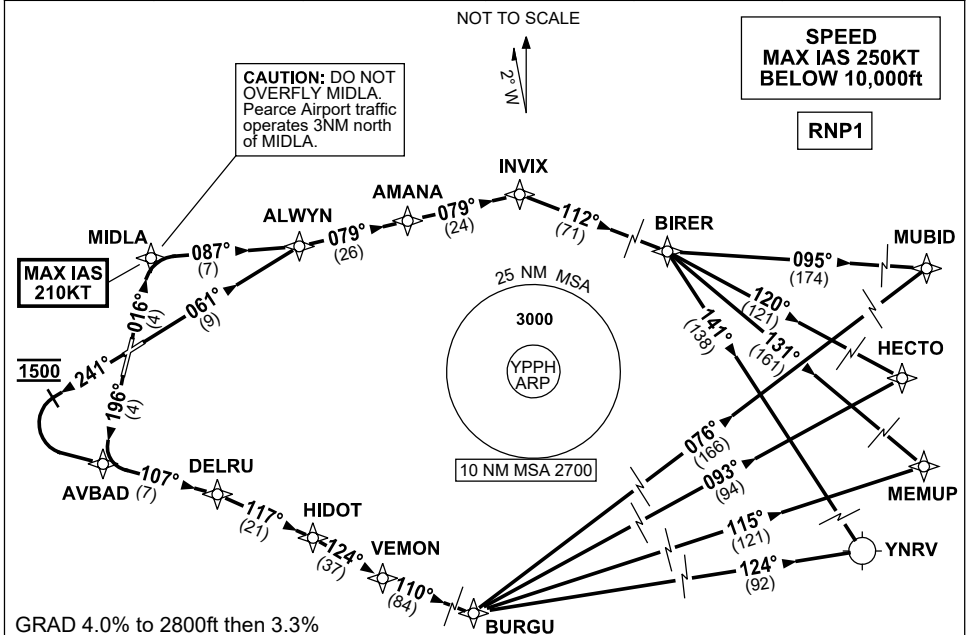

GRAD 4.0% to 2800ft then 3.3%

MUBID **FOUR** **DEPARTURE**
HECTO **FIVE** **DEPARTURE**
MEMUP **FIVE** **DEPARTURE**
RAVENSTHORPE (YNRV) FIVE **DEPARTURE**
RWY 03

MAX IAS 210KT until MIDLA

- Track 016° to MIDLA
- Turn RIGHT, track 087° to ALWYN

RWY 06

- Track 061° to ALWYN

From ALWYN

- Track 079° to AMANA
- Track 079° to INVIX
- Turn RIGHT, track 112° to BIRER

From BIRER

For MUBID

- Turn LEFT, track 095° to MUBID, then as cleared

For HECTO

- Turn RIGHT, track 120° to HECTO, then as cleared

For MEMUP

- Turn RIGHT, track 131° to MEMUP, then as cleared

For YNRV

- Turn RIGHT, track 141° to YNRV

RWY 21

- Track 196° to AVBAD
- Turn LEFT, track 107° to DELRU

RWY 24

- Track 241°
- AT 1500ft turn LEFT
- Track DCT to AVBAD
- Track 107° to DELRU

From DELRU

- Turn RIGHT, track 117° to HIDOT
- Turn RIGHT, track 124° to VEMON
- Turn LEFT, track 110° to BURGU

From BURGU

For MUBID

- Turn LEFT, track 076° to MUBID, then as cleared

For HECTO

- Turn LEFT, track 093° to HECTO, then as cleared

For MEMUP

- Turn RIGHT, track 115° to MEMUP, then as cleared

For YNRV

- Turn RIGHT, track 124° to YNRV


Changes: Editorial.

PPHP04-180

STANDARD INSTRUMENT DEPARTURES (SID) LENVU ONE, PUMRY SEVEN (NON-JET) (RNAV) PERTH, WA (YPPH)

5 SEP 2024

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

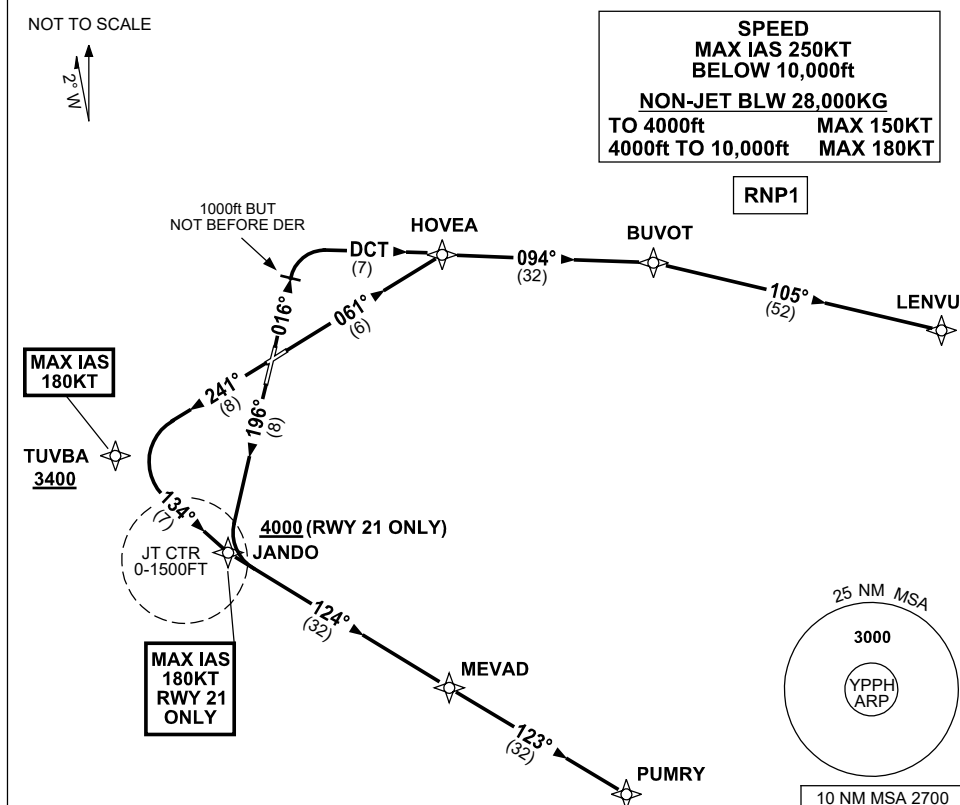

LENVU ONE DEPARTURE (NON-JET)

RWY 03

- GRAD 4.0% to 2800ft THEN 3.3%
- Track 016°
- AT 1000ft but not before DER
Turn RIGHT, track DCT to HOVEA
- Track 094° to BUVOT
- Turn RIGHT, track 105° to LENVU, then as cleared

RWY 06

- GRAD 4.0% to 2800ft THEN 3.3%
- Track 061° to HOVEA
- Turn RIGHT, track 094° to BUVOT
- Turn RIGHT, track 105° to LENVU, then as cleared

PUMRY SEVEN DEPARTURE (NON-JET)

RWY 21

- GRAD 4.0% to 2800ft
THEN 3.3% (7.9% to 4000ft)
MAX IAS 180KT until JANDO
- Track 196° to JANDO
Cross JANDO AT or ABV 4000ft
- Turn LEFT, track 124° to MEVAD
- Track 123° to PUMRY, then as cleared

RWY 24

- GRAD 4.0% to 2800ft
THEN 3.3% (6.6% to 3400ft)
MAX IAS 180KT until TUVBA
- Track 241° to TUVBA
Cross TUVBA AT or ABV 3400ft
- Turn LEFT, track 134° to JANDO
- Track 124° to MEVAD
- Track 123° to PUMRY, then as cleared


Changes: Editorial.

PPHPD07-180

STANDARD INSTRUMENT DEPARTURES (SID)
OPEGA ONE (RNAV)
PERTH, WA (YPPH)

21 MAR 2024

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

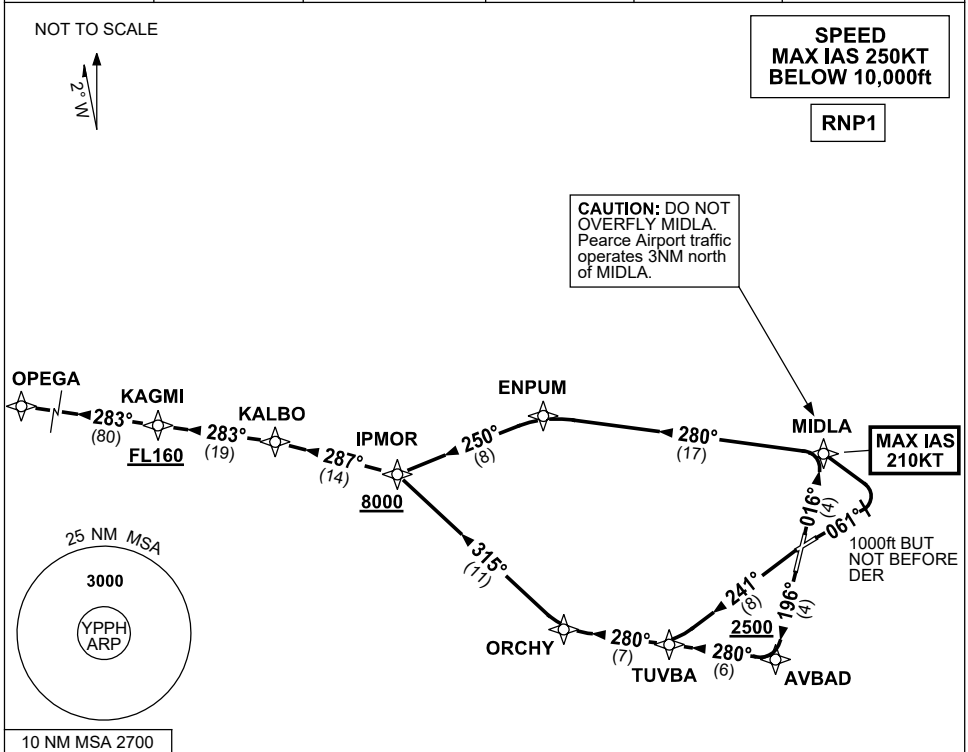

OPEGA ONE DEPARTURE

RWY 03

- GRAD 3.3% (4.7% to 8000ft)
- MAX IAS 210KT UNTIL MIDLA**
- Track 016° to MIDLA

RWY 06

- GRAD 4.0% to 2800ft (4.7% to 8000ft)
- **MAX IAS 210KT UNTIL MIDLA**
- Track 061°
- AT 1000ft but not before DER turn LEFT
- Track DCT to MIDLA

From MIDLA

- Turn LEFT, track 280° to ENPUM
- Turn LEFT, track 250° to IPMOR
- **Cross IPMOR AT or ABV 8000ft**
- Turn RIGHT, track 287° to KALBO
- Turn LEFT, track 283° to KAGMI
- **Cross KAGMI AT or ABV FL160**
- Track 283° to OPEGA, then as cleared

RWY 21

- GRAD 3.7% to 2800ft (4.7% to 8000ft)
- Track 196° to AVBAD
- **Cross AVBAD AT or ABV 2500ft**
- Turn RIGHT, track 280° to TUVBA

RWY 24

- GRAD 3.7% to 2800ft (4.7% to 8000ft)
- Track 241° to TUVBA

From TUVBA

- Track 280° to ORCHY
- Turn RIGHT, track 315° to IPMOR
- **Cross IPMOR AT or ABV 8000ft**
- Turn LEFT, track 287° to KALBO
- Turn LEFT, track 283° to KAGMI
- **Cross KAGMI AT or ABV FL160**
- Track 283° to OPEGA, then as cleared

Changes: MSA REF, DEP INSTRUCTIONS, Editorial.

PPHPD08-178

5 SEP 2024


NOT TO SCALE




CAUTION: DO NOT OVERFLY MIDLA. Pearce Airport traffic operates 3NM north of MIDLA.

SPEED
MAX IAS 250KT
BELOW 10.000ft

RNP1

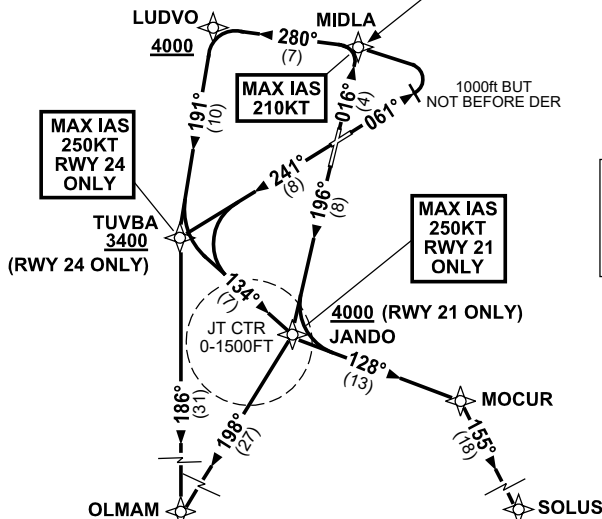

RWY 03: GRAD 3.3%
 RWY 06: GRAD 4.0% to 2800ft
 RWY 21: GRAD 3.7% to 2800ft
 (7.9% to 4000ft)
 RWY 24: GRAD 3.7% to 2800ft
 (6.6% to 3400ft)



10 NM MSA 2700

RWY 03

MAX IAS 210KT until MIDLA

- Track 016° to MIDLA
- Turn LEFT, track 280° to LUDVO
- **Cross** LUDVO AT or ABV 4000ft
- Turn LEFT, track 191° to TUVBA
- Turn LEFT, track 186° to OLMAM

RWY 06

MAX IAS 210KT until MIDLA

- Track 061°
- AT 1000ft but not before DER
- Turn LEFT, track DCT to MIDLA
- Turn LEFT, track 280° to LUDVO
- **Cross** LUDVO AT or ABV 4000ft
- Turn LEFT, track 191° to TUVBA
- Turn LEFT, track 186° to OLMAM

RWY 21

MAX IAS 250KT until JANDO

- Track 196° to JANDO
- **Cross** JANDO AT or ABV 4000ft
- Track 198° to OLMAM

RWY 24

MAX IAS 250KT until TUVBA

- Cross TUVBA AT or ABV 3400ft
- Turn LEFT, track 186° to OLMAM

SOLUS SIX DEPARTURE

RWY 03

MAX IAS 210KT until MIDLA

- Turn LEFT, track 280° to LUDVO
- **Cross** LUDVO AT or ABV 4000ft
- Turn LEFT, track 191° to TUVBA
- Turn LEFT, track 134° to JANDO

RWY 06

MAX IAS 210KT until MIDLA

- Track 061°
- AT 1000ft but not before DER
- Turn LEFT, track DCT to MIDLA
- Turn LEFT, track 280° to LUDVO
- **Cross** LUDVO AT or ABV 4000ft
- Turn LEFT, track 191° to TUVBA
- Turn LEFT, track 134° to JANDO

RWY 21

MAX IAS 250KT until JANDO

- Track 196° to JANDO
Cross JANDO AT or ABV 4000ft

RWY 24

MAX IAS 250KT until TUVBA

- Track 241° to TUVBA
- **Cross** TUVBA AT or ABV 3400ft
- Turn **LEFT**, track 134° to JANDO

From JANDO

- Track 128° to MOCUR
- Turn RIGHT, track 155° to SOLUS

STANDARD INSTRUMENT DEPARTURES (SID)
REPOK ONE (NON-JET) (RNAV)
PERTH, WA (YPPH)

13 JUN 2024


ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

NOT TO SCALE



RNP1

SPEED
MAX IAS 250KT
BELOW 10,000ft
NON-JET BLW 28,000KG
TO 4000ft MAX 150KT
4000ft TO 10,000ft MAX 180KT

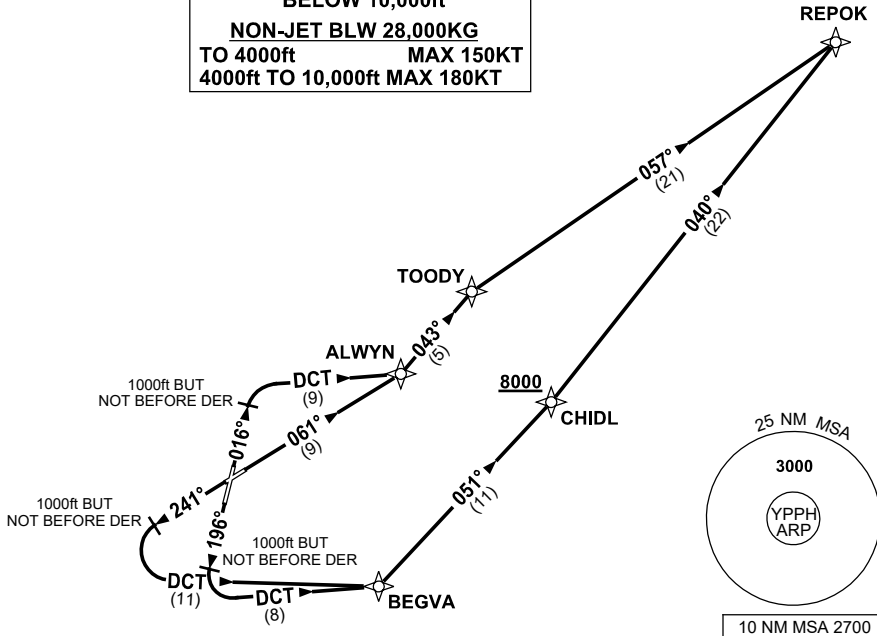

REPOK ONE DEPARTURE (NON-JET)

GRAD 4.0% to 2800ft then 3.3%

RWY 03

- Track 016°
- AT 1000ft but not before DER
- Turn RIGHT, track DCT to ALWYN
- Turn LEFT, track 043° to TOODY
- Turn RIGHT, track 057° to REPOK, then as cleared

RWY 06

- Track 061° to ALWYN
- Turn LEFT, track 043° to TOODY
- Turn RIGHT, track 057° to REPOK, then as cleared

RWY 21

- Track 196°
- AT 1000ft but not before DER
- Turn LEFT, track DCT to BEGVA

RWY 24

- Track 241°
- AT 1000ft but not before DER
- Turn LEFT, track DCT to BEGVA

From BEGVA

- Turn LEFT, track 051° to CHIDL
- **Cross** CHIDL AT or ABV 8000ft
- Turn LEFT, track 040° to REPOK, then as cleared


Changes: REPOK REPLACES RAVON, BEGVA REPLACES SOKAL, VALIDITY INDICATOR.

PPHDP12-179

STANDARD INSTRUMENT DEPARTURES (SID) AVNEX FIVE (JET) (RNAV) PERTH, WA (YPPH)

21 MAR 2024

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

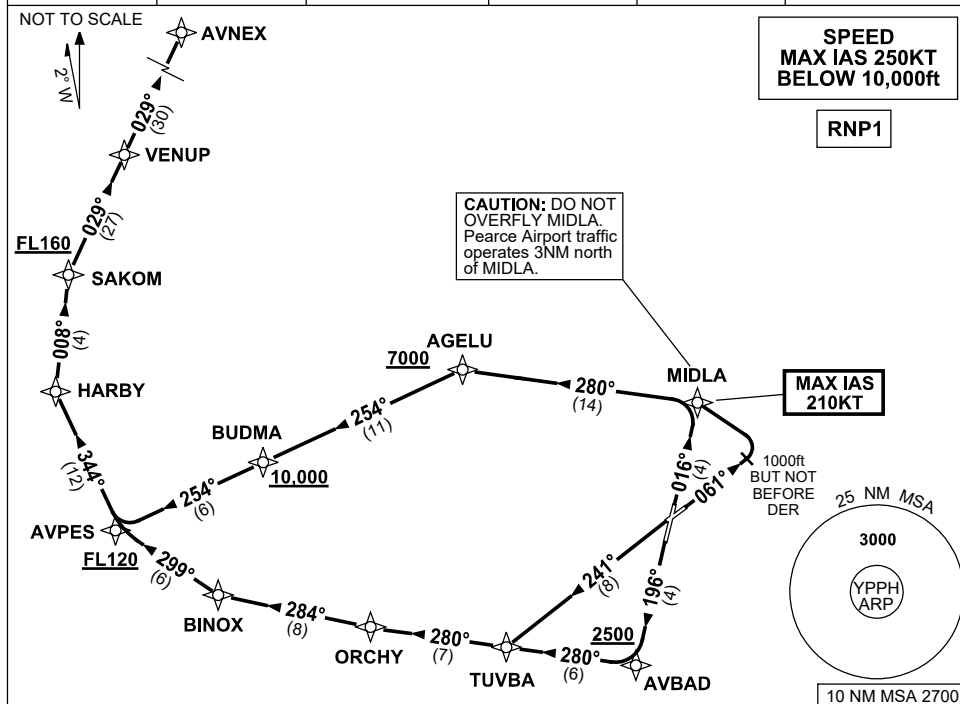

AVNEX FIVE DEPARTURE (JET) (RNAV)

RWY 03

GRAD 3.3% (6.1% to FL120, then 5.1% to FL160)

MAX IAS 210KT UNTIL MIDLA

- Track 016° to MIDLA

RWY 06

GRAD 4% to 2800ft (6.1% to FL120, then 5.1% to FL160)

MAX IAS 210KT UNTIL MIDLA

- Track 061°
- AT 1000ft but not before DER, turn LEFT
- Track DCT to MIDLA

From MIDLA

- Turn LEFT, track 280° to AGELU
Cross AGELU AT or ABV 7000ft
(RQ GRAD to AGELU is 7.0% for RWY 03 only)
- Turn LEFT, track 254° to BUDMA
Cross BUDMA AT or ABV 10,000ft
- Track 254° to AVPES
Cross AVPES AT or ABV FL120
- Turn RIGHT, track 344° to HARBY
- Turn RIGHT, track 008° to SAKOM
Cross SAKOM AT or ABV FL160
- Turn RIGHT, track 029° to VENUP
- Track 029° to AVNEX, then as cleared

RWY 21

GRAD 3.7% to 2800ft (10.6% to 2500ft, 5.7% to FL120, then 4.8% to FL160)

- Track 016° to MIDLA
- Cross AVBAD AT or ABV 2500ft**
- Turn RIGHT, track 280° to TUVBA

RWY 24

GRAD 3.7% to 2800ft (6.6% to FL120, then 4.8% to FL160)

- Track 241° to TUVBA

From TUVBA

- Track 280° to ORCHY
- Turn RIGHT, track 284° to BINOX
- Turn RIGHT, track 299° to AVPES
Cross AVPES AT or ABV FL120
- Turn RIGHT, track 344° to HARBY
- Turn RIGHT, track 008° to SAKOM
Cross SAKOM AT or ABV FL160
- Turn RIGHT, track 029° to VENUP
- Track 029° to AVNEX, then as cleared


Changes: MSA REF, DEP INSTRUCTIONS, Editorial.

PPHPD14-178

STANDARD INSTRUMENT DEPARTURES (SID) OTLED FIVE (NON-JET) (RNAV) PERTH, WA (YPPH)

21 MAR 2024

ATIS 113.7 123.8	ACD 118.55	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	TWR 127.4	DEP 118.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------	---	--------------	--------------	--

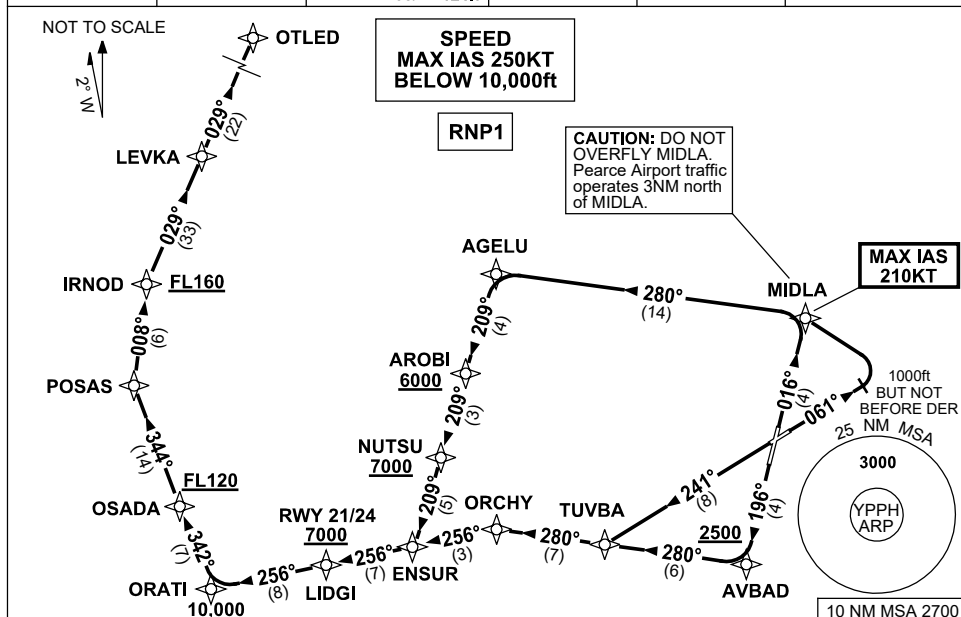

OTLED FIVE DEPARTURE

RWY 03

GRAD 3.3% (4.3% to FL120)
MAX IAS 210KT UNTIL MIDLA

- Track 016° to MIDLA

RWY 06

GRAD 4% to 2800ft (4.3% to FL120)
MAX IAS 210KT UNTIL MIDLA

- Track 061°
- AT 1000ft but not before DER, turn LEFT
- Track DCT to MIDLA

From MIDLA

- Turn LEFT, track 280° to AGELU
- Turn LEFT, track 209° to AROBI
Cross AROBI AT or ABV 6000ft
(RQ GRAD to AROBI is 5.0%)
- Track 209° to NUTSU
Cross NUTSU AT or ABV 7000ft
(RQ GRAD to NUTSU is 5.0%)
- Track 209° to ENSUR
- Turn RIGHT, track 256° to LIDGI
- Track 256° to ORATI,
Cross ORATI AT or ABV 10,000ft
- Turn RIGHT, track 342° to OSADA
Cross OSADA AT or ABV FL120
- Turn RIGHT, track 344° to POSAS
- Turn RIGHT, track 008° to IRNOD,
Cross IRNOD AT or ABV FL160
- Turn RIGHT, track 029° to LEVKA
- Track 029° to OTLED, then as cleared

RWY 21

GRAD 3.7% to 2800ft (10.6% to 2500ft, then 4.2% to FL120)

- Track 196° to AVBAD
Cross AVBAD AT or ABV 2500ft
- Turn RIGHT, track 280° to TUVBA

RWY 24

GRAD 3.7% to 2800ft (5.3% to FL120)

- Track 241° to TUVBA

From TUVBA

- Track 280° to ORCHY
- Turn LEFT, track 256° to ENSUR
- Track 256° to LIDGI
Cross LIDGI AT or ABV 7,000ft
- Track 256° to ORATI
Cross ORATI AT or ABV 10,000ft
- Turn RIGHT, track 342° to OSADA
Cross OSADA AT or ABV FL120
- Turn RIGHT, track 344° to POSAS
- Turn RIGHT, track 008° to IRNOD
Cross IRNOD AT or ABV FL160
- Turn RIGHT, track 029° to LEVKA
then as cleared



Changes: MSA REF, DEP INSTRUCTIONS, Editorial.

PPHPD15-178

USE QNH

RNP Z RWY 03
PERTH, WA (YPPH)

12 JUN 2025

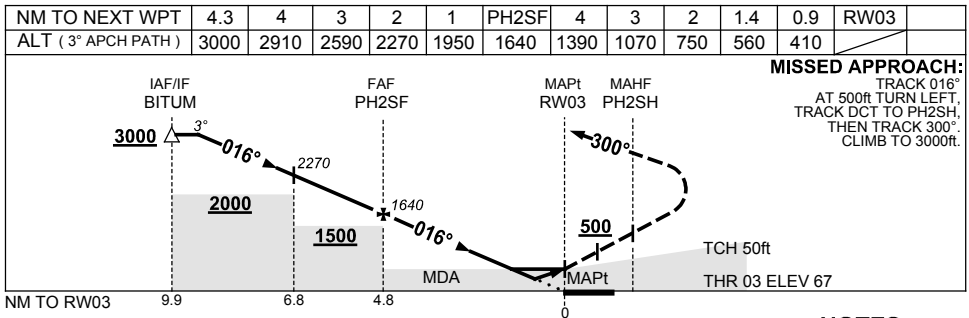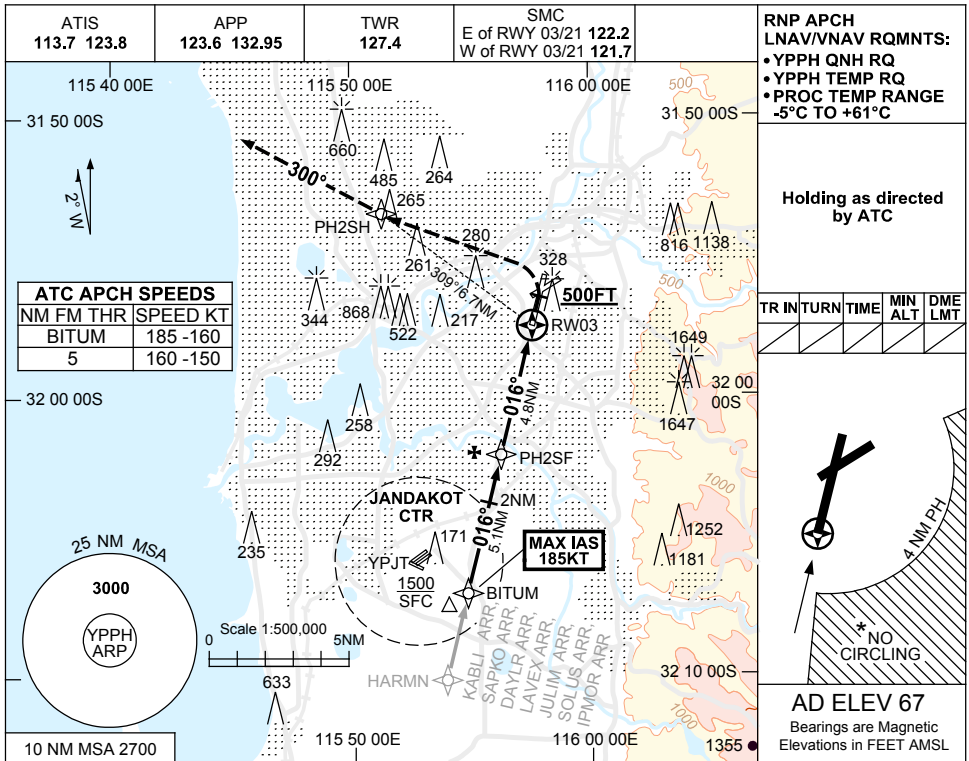

NOTES

- MAX IAS:
BITUM : 185KT.
MISSED APCH
TURN : 200KT.
- NO CIRCLING CAT C & D ACFT BEYOND 4NM PH E OF RWY 03/21 AND 06/24.
- COLOUR: SEE SPEC NOTICES.

CATEGORY	A	B	C	D
LNAV/VNAV	410 (343-1.0)			
LNAV	560 (493-1.9)			
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE	(1193-4.4)	(1873-6.0)	(1873-7.0)	



Changes: YPJT ABN DCMSD, Editorial.

PPHGN01-183

USE QNH

RNP RWY 21
PERTH, WA (YPPH)

12 JUN 2025

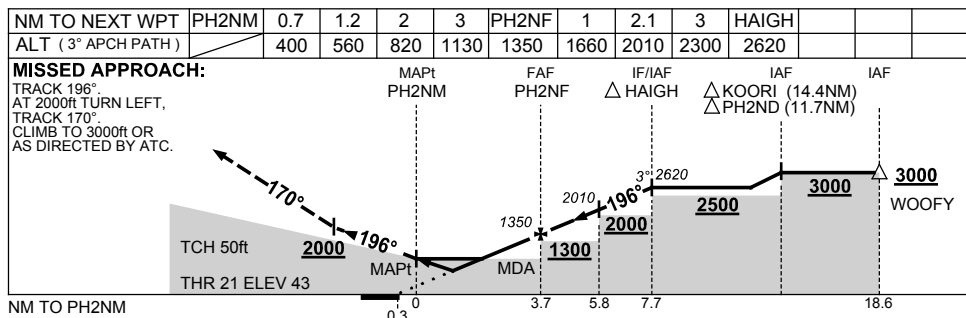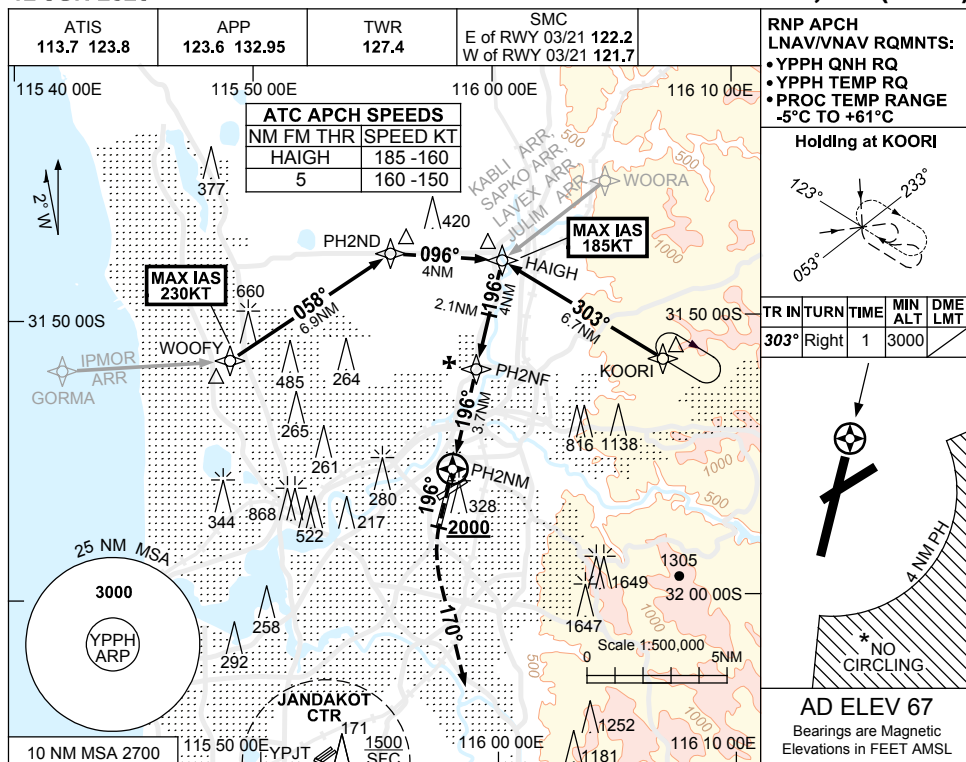

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	400 (357-1.1)			
LNAV	560 (517-2.0)			
CIRCLING*	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE	(1193-4.4)	(1873-6.0)	(1873-7.0)	

1. MAX IAS:
HAIGH : 185KT,
WOOFY : 230KT.

* 2. NO CIRCLING CAT C & D
ACFT BEYOND 4NM PH
E OF RWY 03/21 AND 06/24.

3. COLOUR: SEE
SPEC NOTICES.



Changes: YPJT ABN DCMSD, Editorial.

PPHGN02-183

USE QNH

RNP RWY 06
PERTH, WA (YPPH)

12 JUN 2025

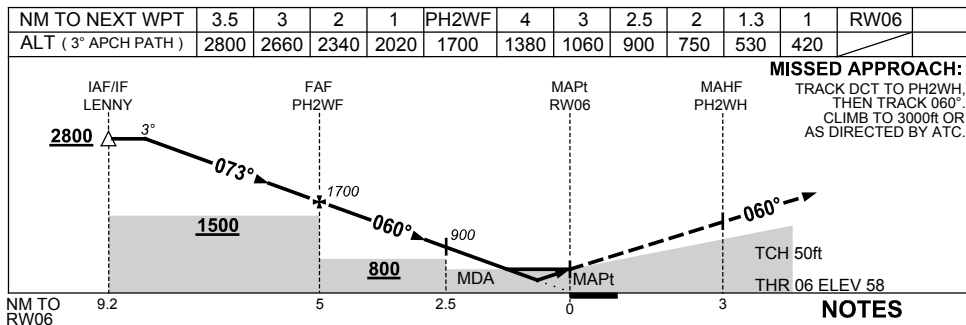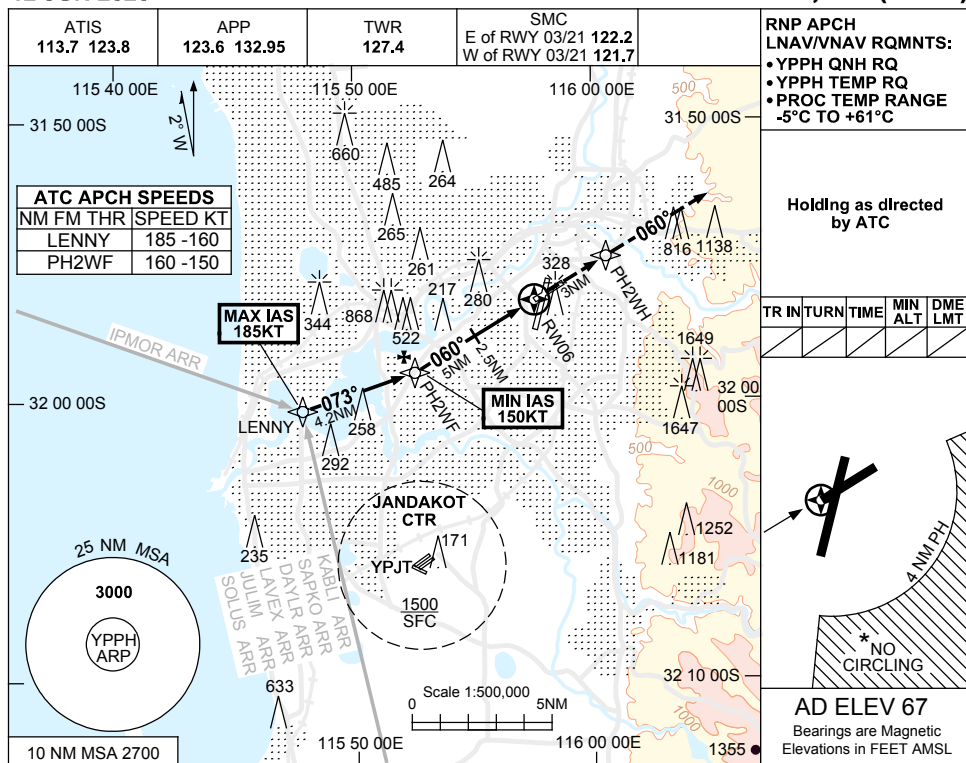

CATEGORY	A	B	C	D
LNAV/VNAV		420 (362-2.0)		
LNAV		530 (472-2.7)		
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE	(1193-4.4)	(1873-6.0)	(1873-7.0)	

- MAX IAS:
LENNY : 185KT.
- MIN IAS:
PH2WF : 150KT.
- * NO CIRCLING CAT C & D ACFT BEYOND 4NM PH E OF RWY 03/21 AND 06/24.
- * COLOUR: SEE SPEC NOTICES.

Changes: YPJT ABN DCMSD, Editorial.

PPHGN03-183

RNP RWY 24
PERTH, WA (YPPH)

ATIS
113.7 123.8

APP
123.6 132.95

TWR
127.4

SMC
E of RWY 03/21 122.2
W of RWY 03/21 121.7

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
5			160 -150

RNP APCH
LNAV/VNAV RQMTS:
• YPPH QNH RQ
• YPPH TEMP RQ
• PROC TEMP RANGE
-5°C TO +61°C

Holding as directed by ATC

TR	TURN	TIME	MIN ALT	DME LMT

AD ELEV 67
Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	RW24	1	1.4	2	3	3.5	4	PH2EF	1	2	2.5	
ALT (3° APCH PATH)		430	560	740	1060	1220	1380	1700	2020	2340	2500	

MISSED APPROACH:
 TRACK DCT TO PH2EH,
 THEN TRACK 241°. CLIMB TO 3000ft OR
 AS DIRECTED BY ATC.

MAHF PH2EH MAPt RW24 FAF PH2EF IF KOORI IAF SPUDO

241° 241° 3° 241° 3000

TCH 50ft THR 24 ELEV 58 MDA 1200 1700 2500

NM TO RW24 3 0 3.5 5 8.3 12.4

*1. NO CIRCLING
CAT C&D ACFT
BEYOND 4NM PH
E OF RWY 03 / 21
AND 06 / 24.
2. **COLOUR:** SEE
SPEC NOTICES.



CATEGORY	A	B	C	D
LNAV/VNAV	430 (372-1.2)			
LNAV	560 (502-1.9)			
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)		
ALTERNATE	(1193-4.4)	(1873-6.0)		
		(1873-7.0)		

PPHGN04-187

FOR CASA APPROVED OPERATORS ONLY USE QNH

RNP X RWY 03 (AR)
PERTH, WA (YPPH)

12 JUN 2025

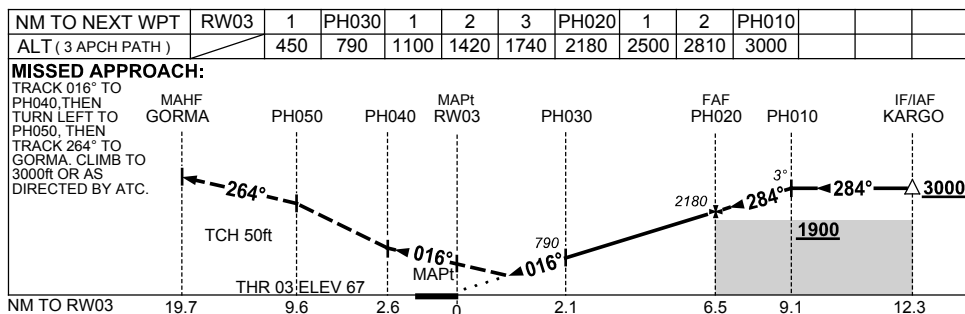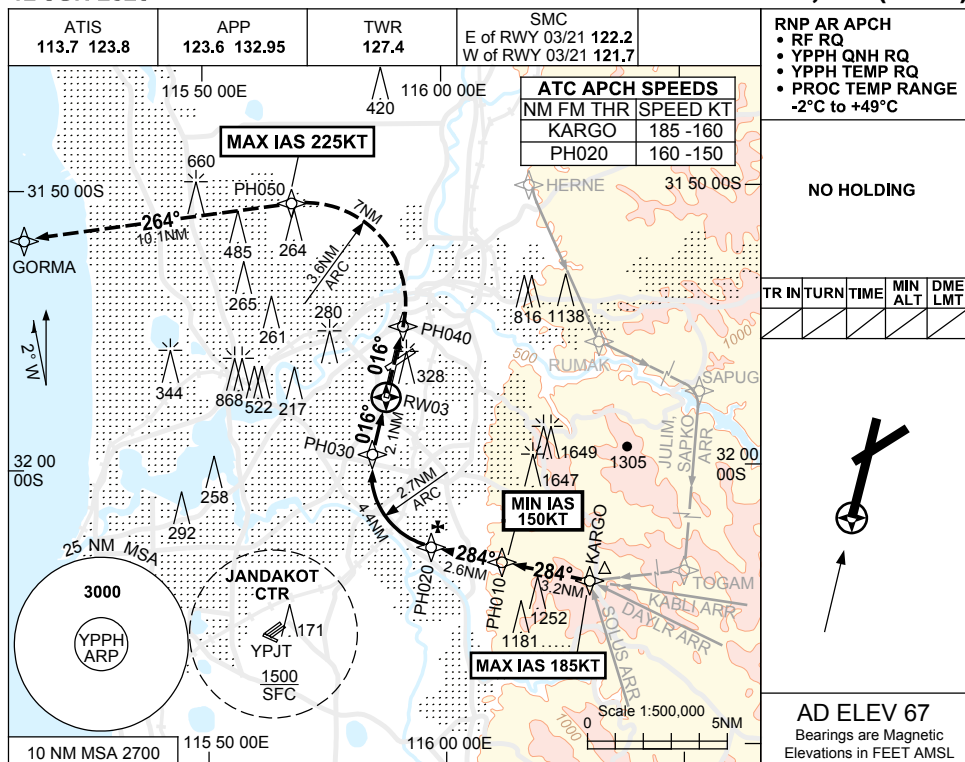

NOTES



- MAX IAS:
KARGO : 185KT.
MISSED APCH
TURN : 225KT.
- MIN IAS:
PH010 : 150KT.
- RNP 0.3 FM KARGO.
- COLOUR:** SEE SPEC NOTICES.

CATEGORY	A	B	C	D
RNP 0.3	450 (383-1.2)			
CIRCLING	NOT AUTHORISED			
ALTERNATE	(1193-4.4)		(1873-6.0)	(1873-7.0)

Changes: YPJT ABN DCMSD, Editorial.

PPHGN05-183

USE QNH

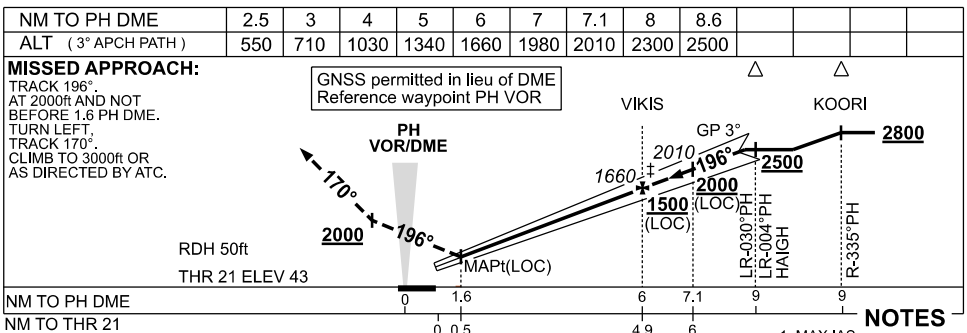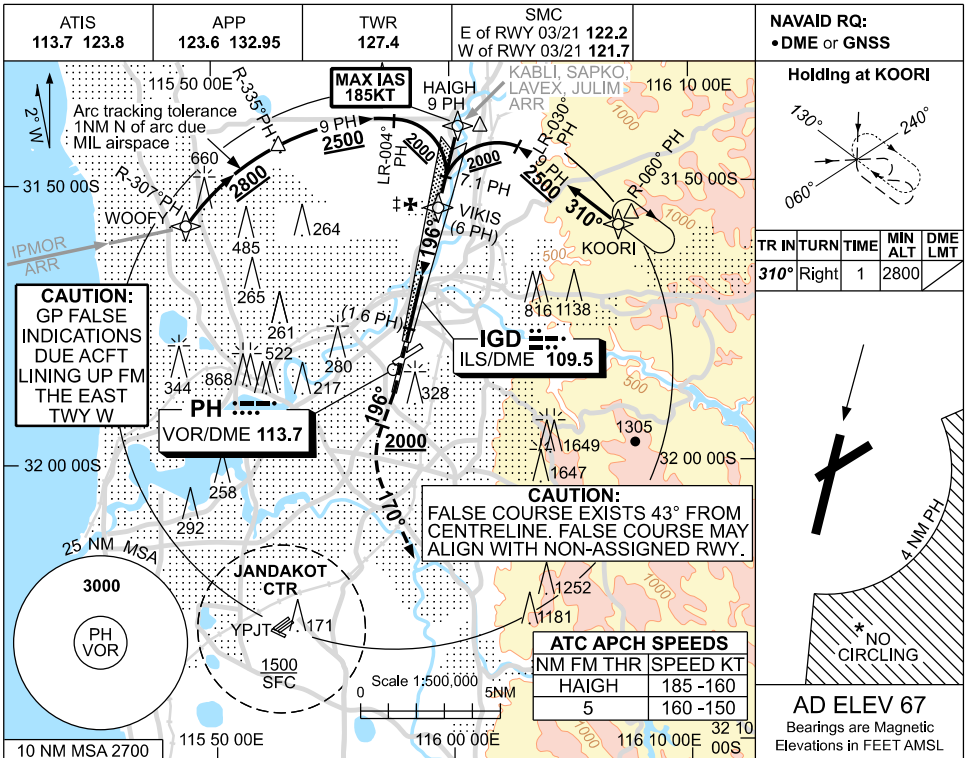ILS-Y or LOC-Y RWY 21
PERTH, WA (YPPH)**09 JUL 2026**

CATEGORY	A	B	C	D/DL
S-I ILS		250 (207) 0.8	550 RVR	
S-I LOC		550 (507-2.0)		
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE *	(1193-4.4)	(1873-6.0)	(1873-7.0)	

Changes: CAUTION NOTE, Editorial.



PPII01-187

USE QNH

ILS-Z or LOC-Z RWY 03

09 JUL 2026

PERTH, WA (YPPH)

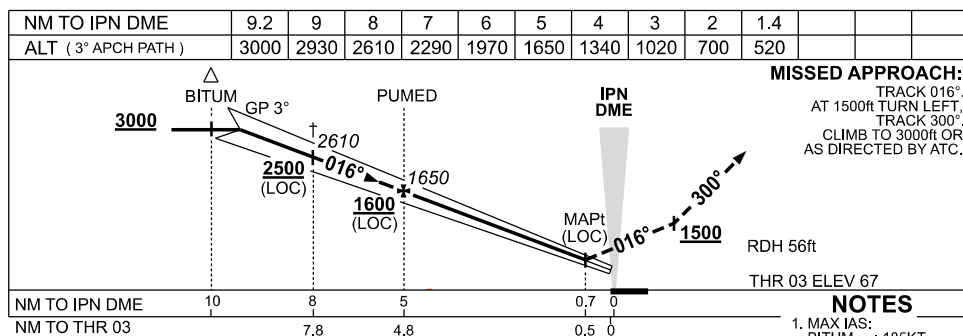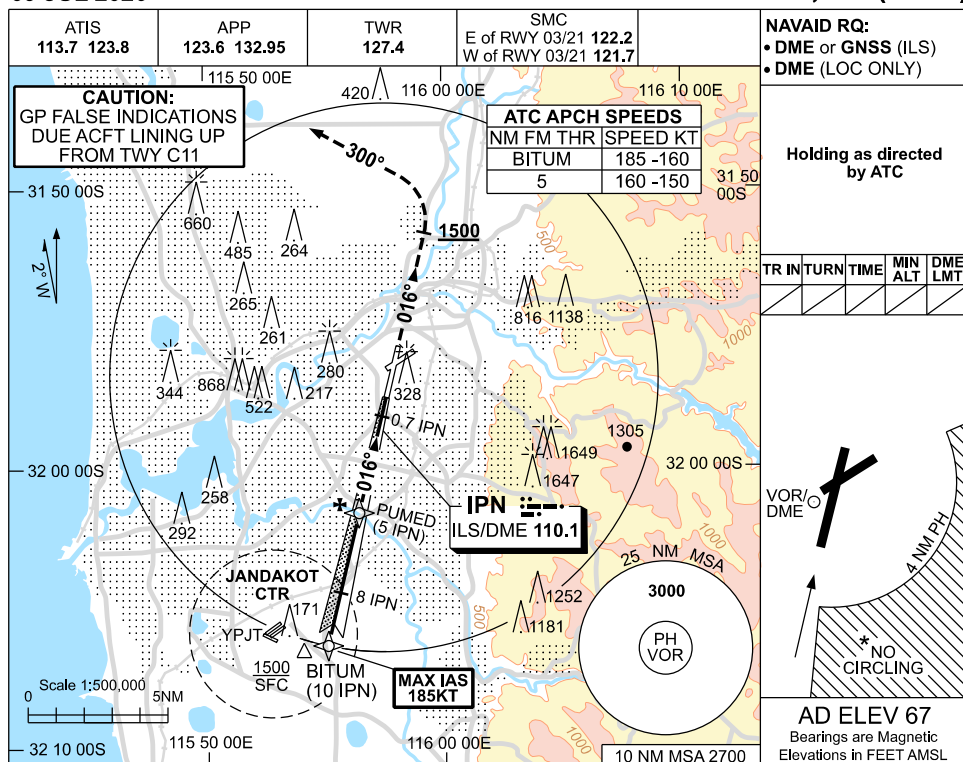

CATEGORY	A	B	C	D/DL
S-I ILS SA CAT I #	RA 148 DA 217 (150) 450 RVR			
S-I ILS	270 (203) 0.8 550 RVR			
S-I LOC	520 (453-1.7)			
CIRCLING *	760 (693-2.4)		1440 (1373-4.0)	1440 (1373-5.0)
ALTERNATE *	(1193-4.4)		(1873-6.0)	(1873-7.0)

Changes: CAUTION NOTE, Editorial.



PPII03-187

USE QNH

ILS-Y or LOC-Y RWY 03

PERTH, WA (YPPH)

09 JUL 2026

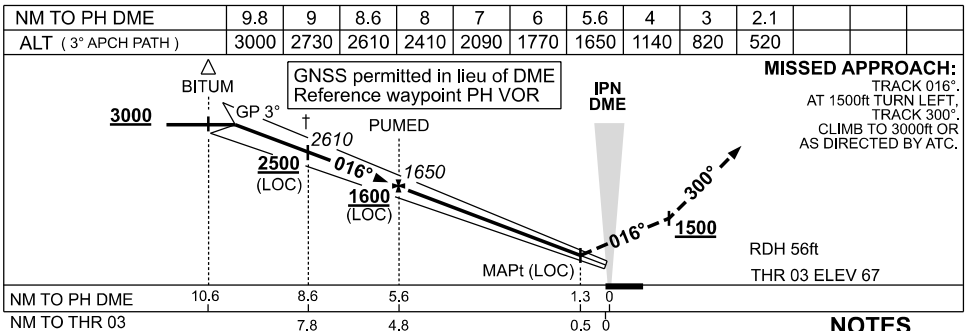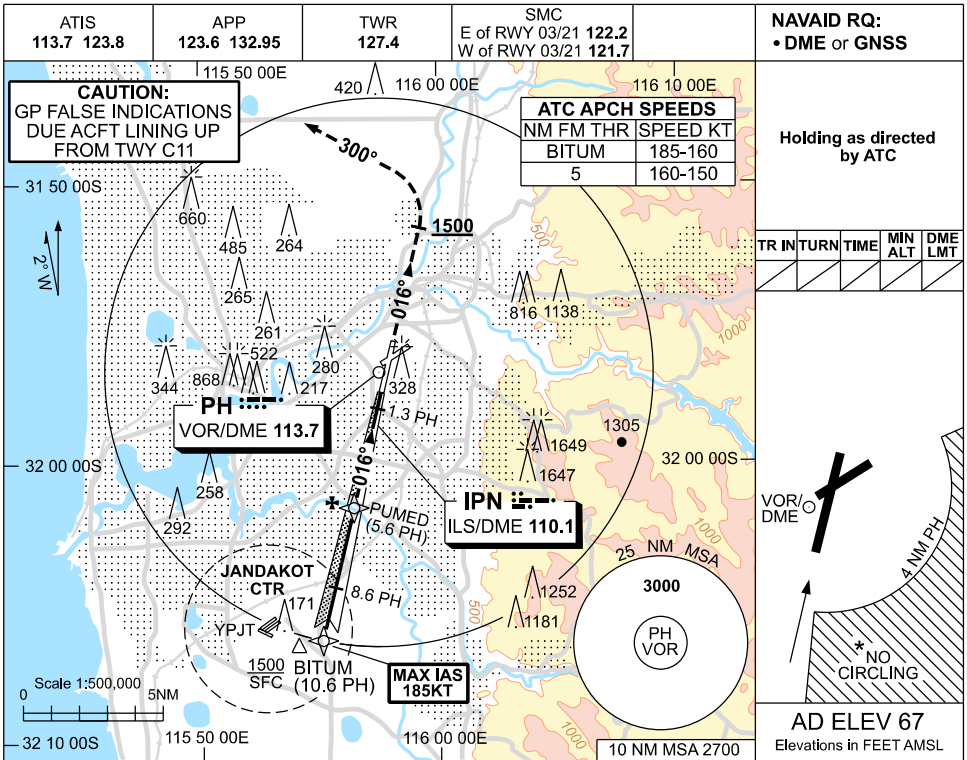



CATEGORY	A	B	C	D/D _L
S-I ILS	270 (203) 0.8			550 RVR
S-I LOC	520 (453-1.7)			
CIRCLING *	760 (693-2.4)		1440 (1373-4.0)	1440 (1373-5.0)
ALTERNATE *	(1193-4.4)		(1873-6.0)	(1873-7.0)

Changes: CAUTION BOX, Editorial.

PPII04-187

09 JUL 2026

PERTH, WA (YPPH)

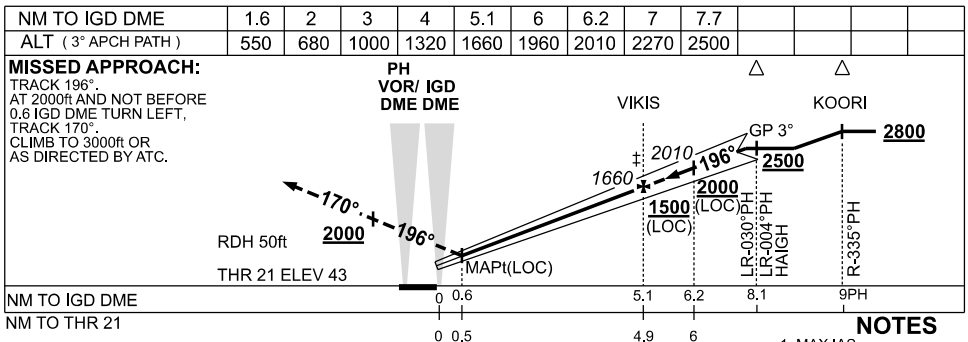
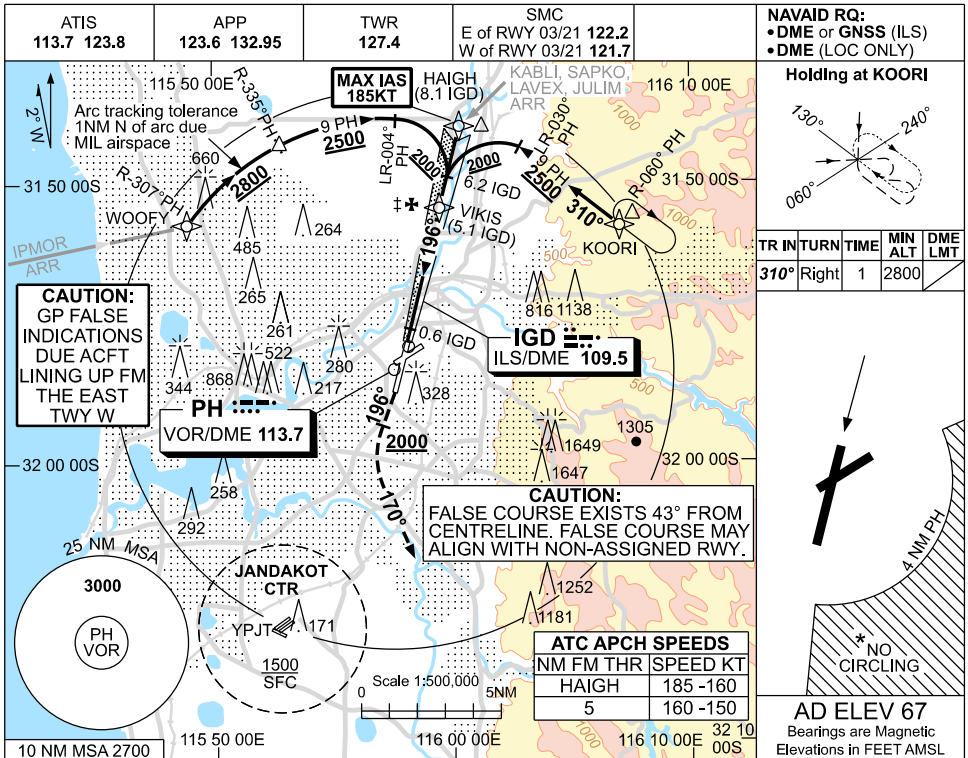


CATEGORY	A	B	C	D/DL
S-I ILS CAT I		250 (207) 0.8	550 RVR	
S-I LOC		550 (507-2.0)		
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE *	(1193-4.4)	(1873-6.0)	(1873-7.0)	

Changes: CAUTION NOTE, Editorial.

PPII05-187

09 JUL 2026

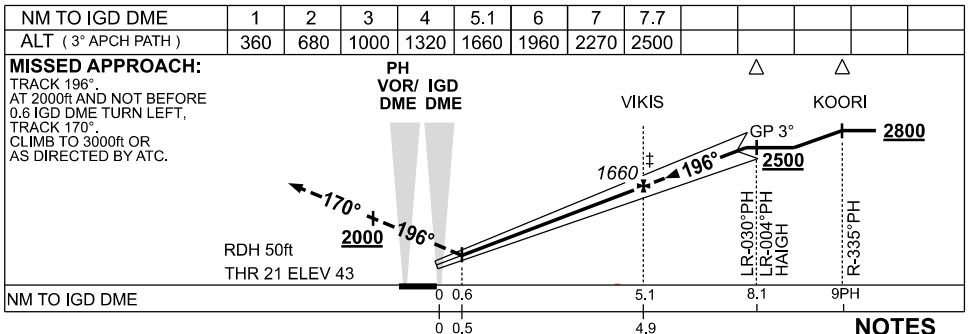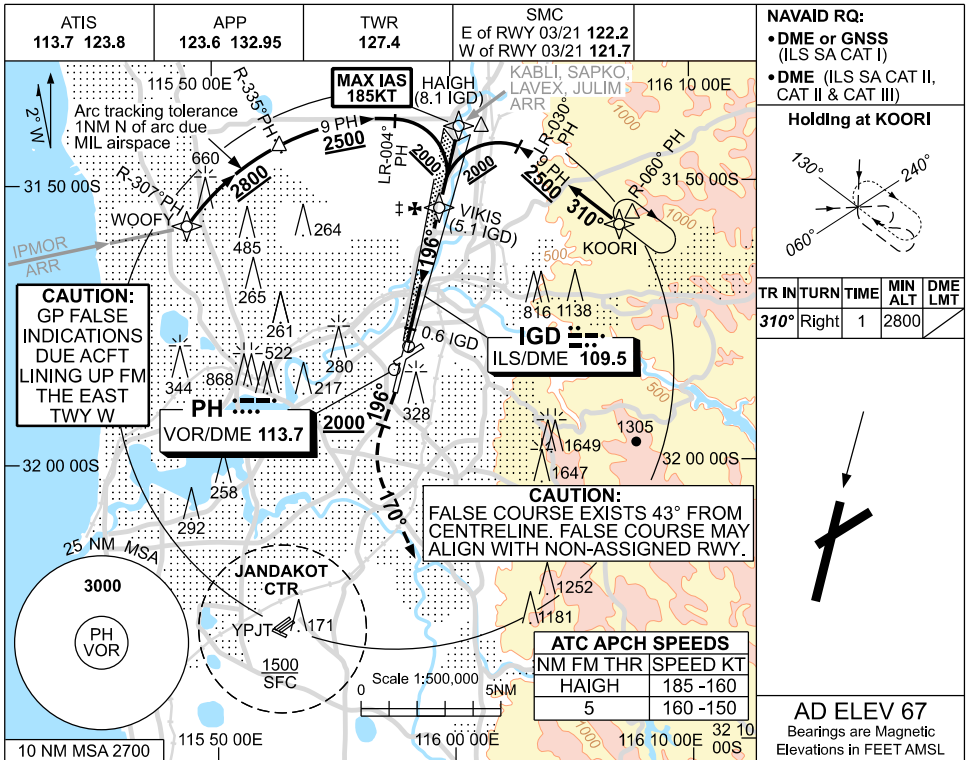**NOTES**

- MAX IAS:
HAIGH : 185KT.
- SPECIAL AIRCREW & ACFT CERTIFICATION REQUIRED.
- ACFT MAY BE RADAR VECTORED TO FNA.
- CAT A-C 350RVR
CAT D 400RVR.
- COLOUR: SEE SPEC NOTICES.

CATEGORY	A	B	C	D/DL
S-I ILS CAT IIIb #			75RVR	
S-I ILS CAT II #		RA102 DA 143 (100)	300RVR	
S-I ILS SA CAT II #		RA102 DA 143 (100)	350/400RVR §	
S-I ILS SA CAT I #		RA154 DA 193 (150)	450RVR	

Changes: CAUTION NOTE, Editorial.

PPH107-187

NOISE ABATEMENT PROCEDURES

PERTH

1 - PREFERRED RUNWAYS

- 1.1 - Runways will be nominated by Air Traffic Control for noise abatement as follows:
- | | |
|-----------|---|
| Landing | 1 - Runway 21, Runway 03 and Runway 24 are equally preferred. |
| | 2 - Runway 06 |
| Departing | 1 - Runway 21, Runway 03 and Runway 06 are equally preferred. |
| | 2 - Runway 24. |
- 1.2 - Due to a co-ordinated runway change plan for traffic management at Perth and Pearce, runway changes at Perth will generally be effected when the wind conditions listed in AIP NAP are met at both aerodromes.

2 - PREFERRED FLIGHT PATHS

- 2.1 - The minimum height over residential areas is:
- Jet aircraft 5000FT AGL;
 - Turbo-prop aircraft 3000FT AGL;
- except where impractical in the normal course of operation to and from the airport runways.
- 2.2 - Aircraft departing to the east of Perth on Standard Instrument Departures will be kept on track until leaving an altitude of 8000FT except when required for operational reasons.
- 2.3 - ATC shall normally process IFR departing aircraft via Standard Instrument Departures. When a departing aircraft is not following a procedural SID, ATC shall process the aircraft via flight paths that approximate relevant SID tracks, where possible, and in compliance with paragraph 2.1.
- 2.4 - IFR arriving aircraft must be processed via STAR tracks where available. STAR tracking may only be varied if essential for sequencing or separation.
- 2.5 - Non-STAR tracking must approximate STAR tracks or must comply with paragraph 2.1 except:
1. Landing runway 21, arriving from the South
 - a. ACFT at or below 45000kg MTOW, visual left CIRCUIT
 2. Landing runway 21, arriving from the West
 - a. Via WOOFY to 6nm final runway 21 for VISUAL APPROACH
 3. Landing runway 24, arriving from the South
 - a. Via SPUDO
 4. Landing runway 03, arriving from the South or West
 - a. Via HARMN for ILS approach
 - b. Via 5nm Final runway 03 for VISUAL APPROACH
 5. Landing runway 06, arriving from the Southwest or West
 - a. West of the coast then via straight in approach

3 - TRAINING FLIGHTS

See AIP/ERSA

1 - PERTH-DEPARTING AIRCRAFT

- 1.1 - Whenever possible, complete cockpit checks prior to lineup and keep any checks requiring completion on the runway to a minimum.
- 1.2 - On receipt of line up clearance, taxi into position as soon as possible. Do not backtrack.
- 1.3 - Pilots and ATC should endeavour to keep aircraft moving and avoid a standing start.
- 1.4 - Commence the take off roll as soon as take off clearance is issued.

2 - PERTH-ARRIVING AIRCRAFT

- 2.1 - By day, ATC may use 2,400M runway separation between aircraft arriving to RWY 03/21. Both aircraft may occupy the runway during application of the standard.
- 2.2 - To ensure minimum runway occupancy time and support optimum spacing on final, whenever operational conditions permit, expect to vacate the runway via the exit taxiways specified in the table below.
- 2.3 - Plan a predictable and efficient exit from the runway and, if an exit other than the preferred is required, advise tower on first contact.
- 2.4 - Landing Exit Distance (LED), the distance from the threshold to the furthest edge of the exit taxiway, are provided to assist planning.

	Aircraft Type	PREFERRED Exits	LED (Metres)
RWY 03	Non-Jet Jet F100/E195/RJ1H and BLW	A6/C6	1588
	Jet ABV F100/E195/RJ1H	P D	1975 2640
RWY 21	Non-Jet Jet Light, Medium	A6/C6	1777
	Jet Heavy	A7 C9	1984 2484
RWY 24	All	J1/A#	1636

Note 1: Aircraft may vacate at an earlier exit without ATC approval.

Note 2: # These exits have different LEDs if vacating left or right and the distance promulgated is the shortest of these LEDs.

Note 3: Preferred exits for RWY 06 not promulgated due infrequent use.

STANDARD INSTRUMENT ARRIVAL (STAR) LAVEX THREE ALPHA ARRIVALS (NON-JET) (RNAV) RWY 03/06 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--


NOT TO SCALE



ATC APCH SPEEDS	
NM FM TD	SPEED KT
RWY 03 BITUM	185 -160
RWY 06 LENNY	185 -160

SPEED
MAX IAS 250KT
BELOW 10,000ft

RNP1

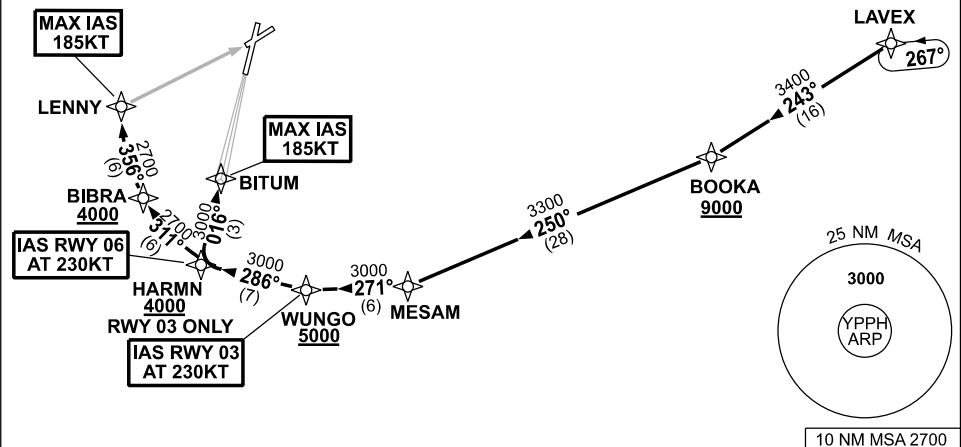

LAVEX THREE ALPHA ARRIVALS

RWY 03:

- From LAVEX track 243° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Turn RIGHT track 250° to MESAM
- Turn RIGHT track 271° to WUNGO
Cross WUNGO AT or ABV 5000ft
IAS AT 230KT from WUNGO
- Turn RIGHT track 286° to HARMN
Cross HARMN AT or ABV 4000ft
- Turn RIGHT track 016° to BITUM
for ILS, RNP Z or
LOC RWY 03 APPROACH
MAX IAS 185KT from BITUM.

RWY 06:

- From LAVEX track 243° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Turn RIGHT track 250° to MESAM
- Turn RIGHT track 271° to WUNGO
Cross WUNGO AT or ABV 5000ft
- Turn RIGHT track 286° to HARMN
IAS AT 230KT from HARMN
- Turn RIGHT track 311° to BIBRA
Cross BIBRA AT or ABV 4000ft
- Turn RIGHT track 356° to LENNY
for RNP or
VOR RWY 06 APPROACH
MAX IAS 185KT from LENNY.

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.


Changes: FROM SUP H09/26.

PPHSR01-187

STANDARD INSTRUMENT ARRIVAL (STAR) DAYLR FIVE ALPHA ARRIVALS (NON-JET) (RNAV) PERTH, WA (YPPH)

13 JUN 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

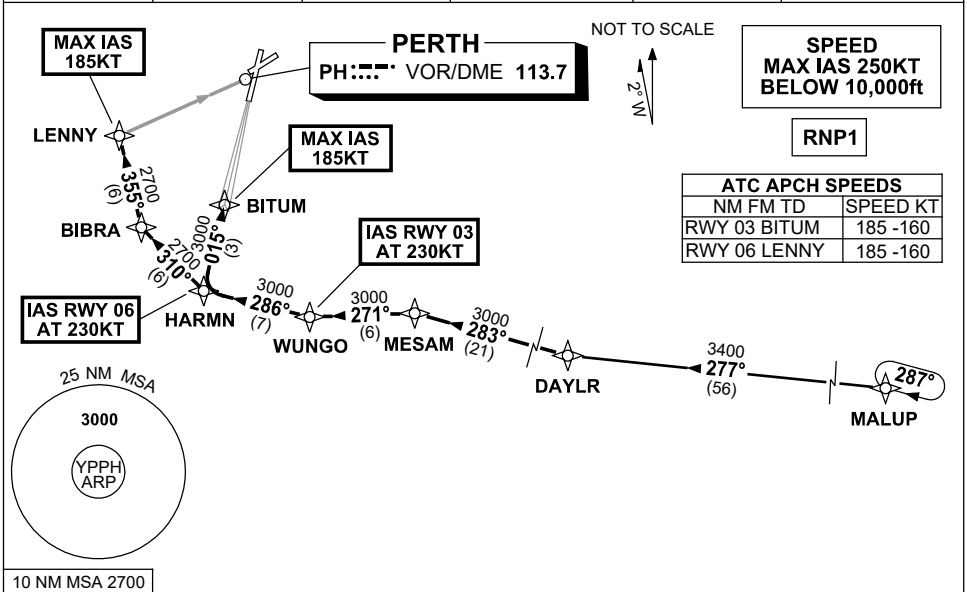

TRANSITIONS:

MALUP: From MALUP to DAYLR,
Track 277° to DAYLR,
Then follow ARRIVAL instructions.

ARRIVAL: DAYLR FIVE

RWY 03 ALPHA: From DAYLR, track 283° to MESAM,
• Turn LEFT, track 271° to WUNGO,
IAS AT 230KT from WUNGO,
• Turn RIGHT, track 286° to HARMN,
• Turn RIGHT, track 015° to BITUM,
for ILS, RNP Z or LOC RWY 03 APPROACH.
MAX IAS 185KT from BITUM.

RWY 06 ALPHA: From DAYLR, track 283° to MESAM,
• Turn LEFT, track 271° to WUNGO,
• Turn RIGHT, track 286° to HARMN,
IAS AT 230KT from HARMN,
• Turn RIGHT, track 310° to BIBRA,
• Turn RIGHT, track 355° to LENNY,
for RNP or VOR RWY 06 APPROACH.
MAX IAS 185KT from LENNY.

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.


Changes: BITUM REPLACES TIMMY, MALUP REPLACES HAMTN, VALIDITY INDICATOR.

PPHSR02-179

**STANDARD INSTRUMENT ARRIVAL (STAR)
SAPKO FOUR VICTOR ARRIVALS (NON-JET) (RNAV)
PERTH, WA (YPPH)**

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--

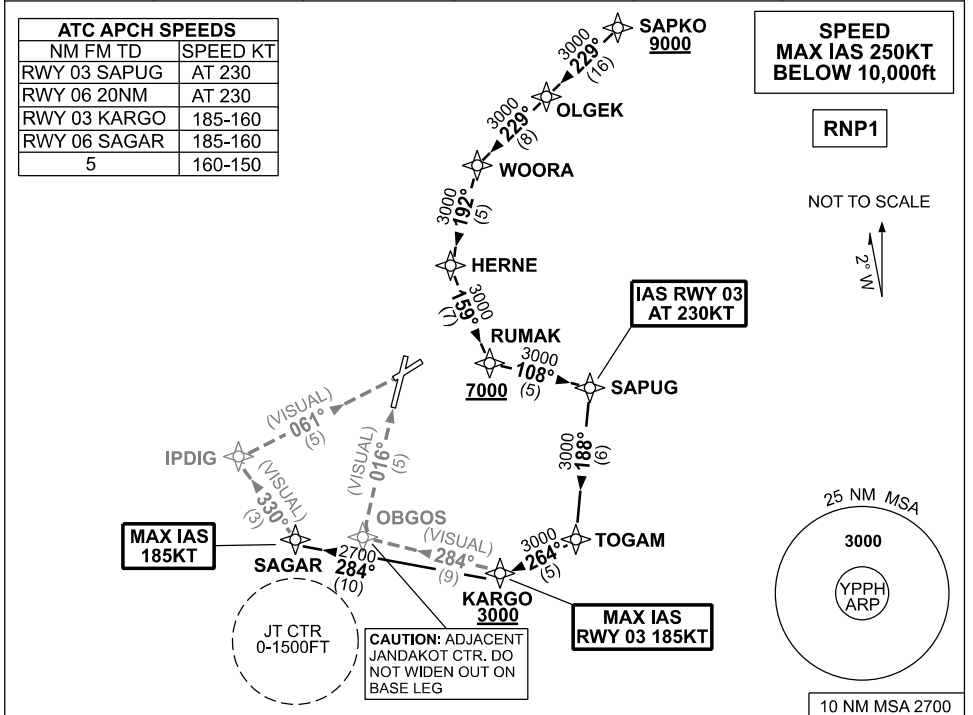

SAPKO FOUR ARRIVALS

- Cross** SAPKO AT or ABV 9000ft
- From SAPKO track 229° to OLGEK
- Track 229° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to RUMAK
- Cross** RUMAK AT or ABV 7000ft
- Turn LEFT track 108° to SAPUG
- IAS** RWY 03 AT 230KT from SAPUG
- Turn RIGHT track 188° to TOGAM
- Turn RIGHT track 264° to KARGO
- Cross** KARGO AT or ABV 3000ft
- MAX IAS** RWY 03 185KT from KARGO.

- RWY 03 VICTOR:** From KARGO
- Turn RIGHT track 284° VISUAL to OBGOS for VISUAL final RWY 03
- RWY 06 VICTOR:**
- From KARGO turn RIGHT track 284° to SAGAR
 - MAX IAS** 185KT from SAGAR
 - Turn RIGHT track 330° VISUAL to IPDIG for VISUAL final RWY 06

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: FROM SUP H09/26.

PPHSR03-187

STANDARD INSTRUMENT ARRIVAL (STAR) JULIM EIGHT ALPHA ARRIVALS (JET) (RNAV) RWY 03/06 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--



NOT TO SCALE



SPEED
MAX IAS 250KT
BELOW 10,000ft

RNP1

ATC APCH SPEEDS			
NM	FM	TD	SPEED KT
RWY 03	BITUM		185 -160
RWY 06	LENNY		185 -160

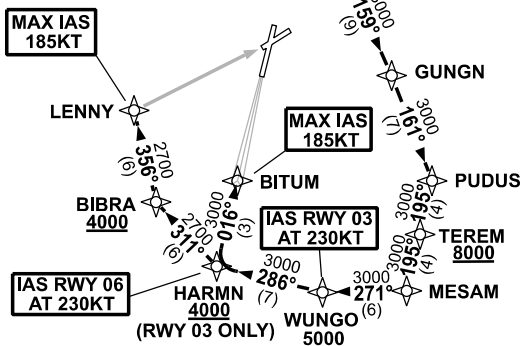

JULIM EIGHT ALPHA ARRIVALS

RWY 03:

- Cross** JULIM AT or ABV 9000ft
- From JULIM track 211° to YIREE
- Track 211° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to GUNGN
- Turn RIGHT track 161° to PUDUS
- Turn RIGHT track 195° to TEREM
- Cross** TEREM AT or ABV 8000ft
- Track 195° to MESAM
- Turn RIGHT track 271° to WUNGO
- Cross** WUNGO AT or ABV 5000ft
- IAS AT 230KT** from WUNGO
- Turn RIGHT, track 286° to HARMN
- Cross** HARMN AT or ABV 4000ft
- Turn RIGHT, track 016° to BITUM for ILS, RNP Z or LOC RWY 03 APPROACH
- MAX IAS 185KT** from BITUM.

RWY 06:

- Cross** JULIM AT or ABV 9000ft
- From JULIM track 211° to YIREE
- Track 211° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to GUNGN
- Turn RIGHT track 161° to PUDUS
- Turn RIGHT track 195° to TEREM
- Cross** TEREM AT or ABV 8000ft
- Track 195° to MESAM
- Turn RIGHT track 271° to WUNGO
- Cross** WUNGO AT or ABV 5000ft
- Turn RIGHT track 286° to HARMN
- IAS AT 230KT** from HARMN
- Turn RIGHT track 311° to BIBRA
- Cross** BIBRA AT or ABV 4000ft
- Turn RIGHT track 356° to LENNY for RNP or VOR RWY 06 APPROACH
- MAX IAS 185KT** from LENNY.

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: FROM SUP H09/26.

PPHSR04-187

STANDARD INSTRUMENT ARRIVAL (STAR) LAVEX THREE VICTOR ARRIVAL (NON-JET) (RNAV) PERTH, WA (YPPH)

09 JUL 2026


ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE



SPEED
MAX IAS 250KT
BELOW 10,000ft

RNP1

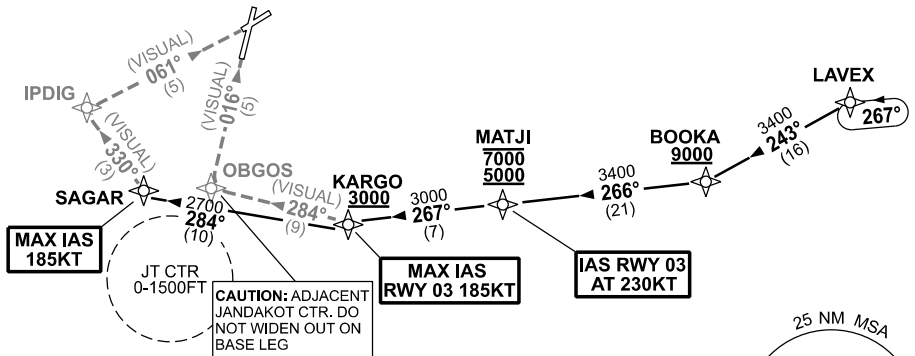

ATC APCH SPEEDS

NM	FM	TD	SPEED KT
RWY 03	MATJI		AT 230
RWY 06	20NM		AT 230
RWY 03	KARGO		185-160
RWY 06	SAGAR		185-160
5			160-150

10 NM MSA 2700

LAVEX THREE ARRIVAL

- From LAVEX track 243° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Turn RIGHT track 266° to MATJI
Cross MATJI BTN 5000ft and 7000ft
IAS RWY 03 AT 230KT from MATJI
- Turn RIGHT track 267° to KARGO
Cross KARGO AT or ABV 3000ft
MAX IAS RWY 03 185KT from KARGO

RWY 03 VICTOR:

- From KARGO turn RIGHT, track 284° VISUAL to OBGOS for VISUAL final RWY 03

RWY 06 VICTOR:

- From KARGO turn RIGHT, track 284° to SAGAR
MAX IAS 185KT from SAGAR
- Turn RIGHT, track 330° VISUAL to IPDIG for VISUAL final RWY 06

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: FROM SUP H09/26.

PPHSR05-187

**STANDARD INSTRUMENT ARRIVAL (STAR)
LAVEX THREE X-RAY ARRIVAL (NON-JET) (RNAV)
PERTH, WA (YPPH)**

09 JUL 2026


ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE



**SPEED
MAX IAS 250KT
BELOW 10,000ft**

RNP1

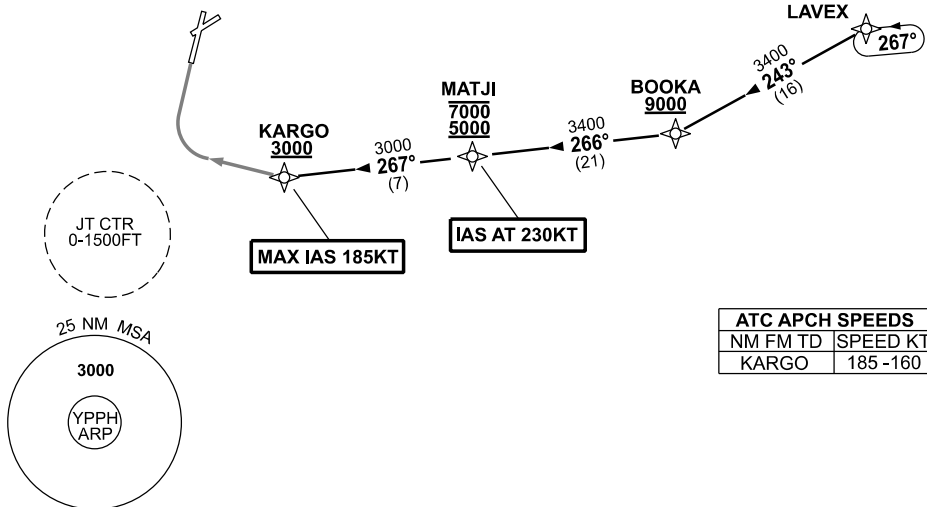

ATC APCH SPEEDS	
NM FM TD	SPEED KT
KARGO	185-160

10 NM MSA 2700

LAVEX THREE ARRIVAL

- From LAVEX track 243° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Turn RIGHT track 266° to MATJI
Cross MATJI BTN 5000ft and 7000ft
IAS AT 230KT from MATJI
- Turn RIGHT track 267° to KARGO
Cross KARGO AT or ABV 3000ft
MAX IAS 185KT from KARGO.

RWY 03 X-RAY: • From KARGO turn RIGHT, track via RNP X RWY 03 (AR).

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.


Changes: FROM SUP H09/26.

PPHSR06-187

**STANDARD INSTRUMENT ARRIVAL (STAR)
DAYLR FIVE VICTOR ARRIVAL (NON-JET) (RNAV)
PERTH, WA (YPPH)**

13 JUN 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

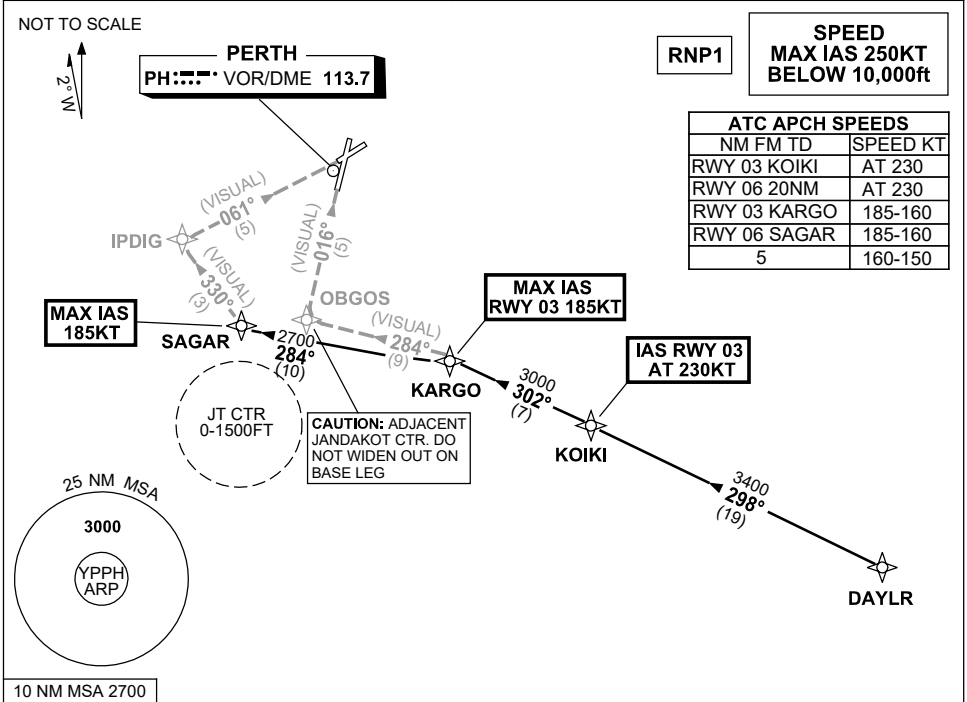

ARRIVAL:

DAYLR FIVE

- From DAYLR, track 298° to KOIKI,
IAS RWY 03 AT 230KT from KOIKI,
- Turn RIGHT, track 302° to KARGO,
MAX IAS RWY 03 185KT from KARGO

RWY 03 VICTOR: • From KARGO turn LEFT, track 284° VISUAL to OBGOS for VISUAL final RWY 03

RWY 06 VICTOR: • From KARGO turn LEFT, track 284° to SAGAR
MAX IAS 185KT from SAGAR
• Turn RIGHT, track 330° VISUAL to IPDIG for VISUAL final RWY 06

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.


Changes: VALIDITY NR, Editorial.

PPHSR07-179

STANDARD INSTRUMENT ARRIVAL (STAR)
DAYLR FIVE X-RAY ARRIVAL (NON-JET) (RNAV)
PERTH, WA (YPPH)

13 JUN 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

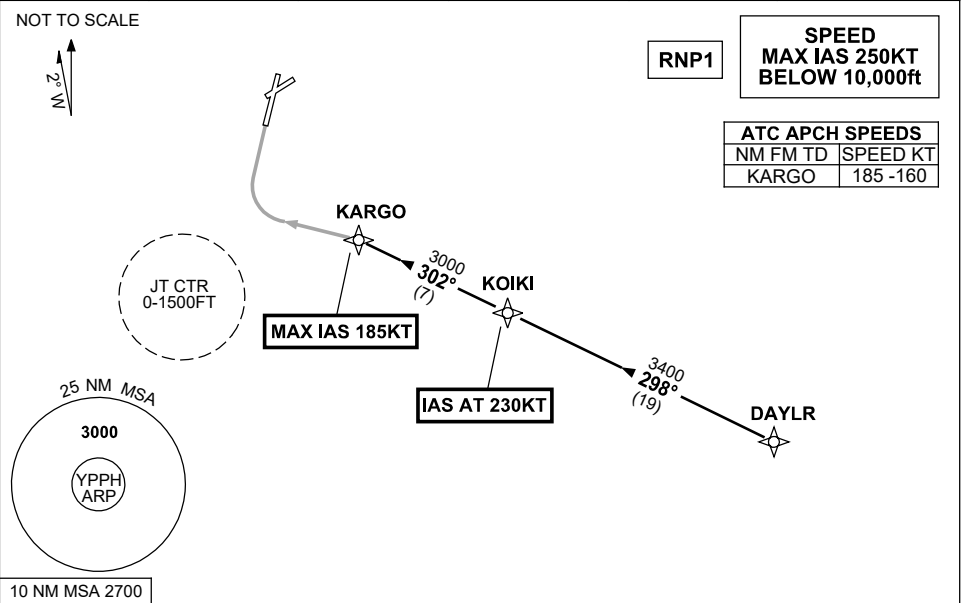

ARRIVAL:

DAYLR FIVE

- From DAYLR, track 298° to KOIKI,
IAS AT 230KT from KOIKI,
- Turn RIGHT, track 302° to KARGO,
MAX IAS 185KT from KARGO

RWY 03 X-RAY:

- From KARGO turn LEFT, track via RNP X RWY 03 (AR).

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSa EMERG Section 1.5.

Changes: VALIDITY NR, Editorial.

PPHSR08-179

STANDARD INSTRUMENT ARRIVAL (STAR)
KABLI THREE ALPHA ARRIVALS (JET) (RNAV) RWY 03/06
PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--


NOT TO SCALE



RNP1

SPEED
MAX IAS 250KT
BELOW 10,000ft

ATC APCH SPEEDS	
NM FM TD	SPEED KT
RWY 03 BITUM	185 -160
RWY 06 LENNY	185 -160

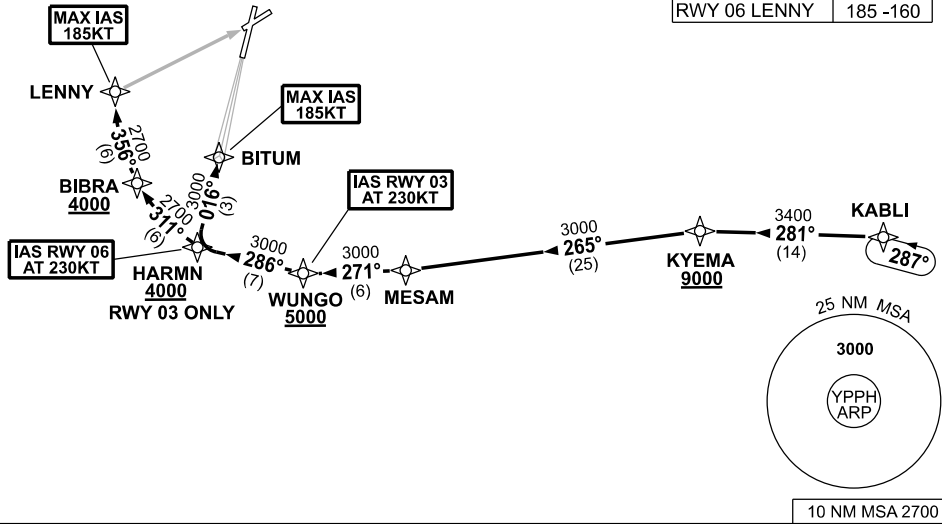

KABL THREE ALPHA ARRIVALS

RWY 03:

- From KABL track 281° to KYEMA
Cross KYEMA AT or ABV 9000ft
- Turn LEFT track 265° to MESAM
- Turn RIGHT track 271° to WUNGO
Cross WUNGO AT or ABV 5000ft
IAS AT 230KT from WUNGO
- Turn RIGHT track 286° to HARMN
Cross HARMN AT or ABV 4000ft
- Turn RIGHT track 016° to BITUM
for ILS, RNP Z or
LOC RWY 03 APPROACH
MAX IAS 185KT from BITUM

RWY 06:

- From KABL track 281° to KYEMA
Cross KYEMA AT or ABV 9000ft
- Turn LEFT track 265° to MESAM
- Turn RIGHT track 271° to WUNGO
Cross WUNGO AT or ABV 5000ft
- Turn RIGHT track 286° to HARMN
IAS AT 230KT from HARMN
- Turn RIGHT track 311° to BIBRA
Cross BIBRA AT or ABV 4000ft
- Turn RIGHT track 356° to LENNY
for RNP or
VOR RWY 06 APPROACH
MAX IAS 185KT from LENNY


COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERS A EMERG Section 1.5.

STANDARD INSTRUMENT ARRIVAL (STAR)
SOLUS THREE ALPHA ARRIVALS (RNAV)
PERTH, WA (YPPH)

5 SEP 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

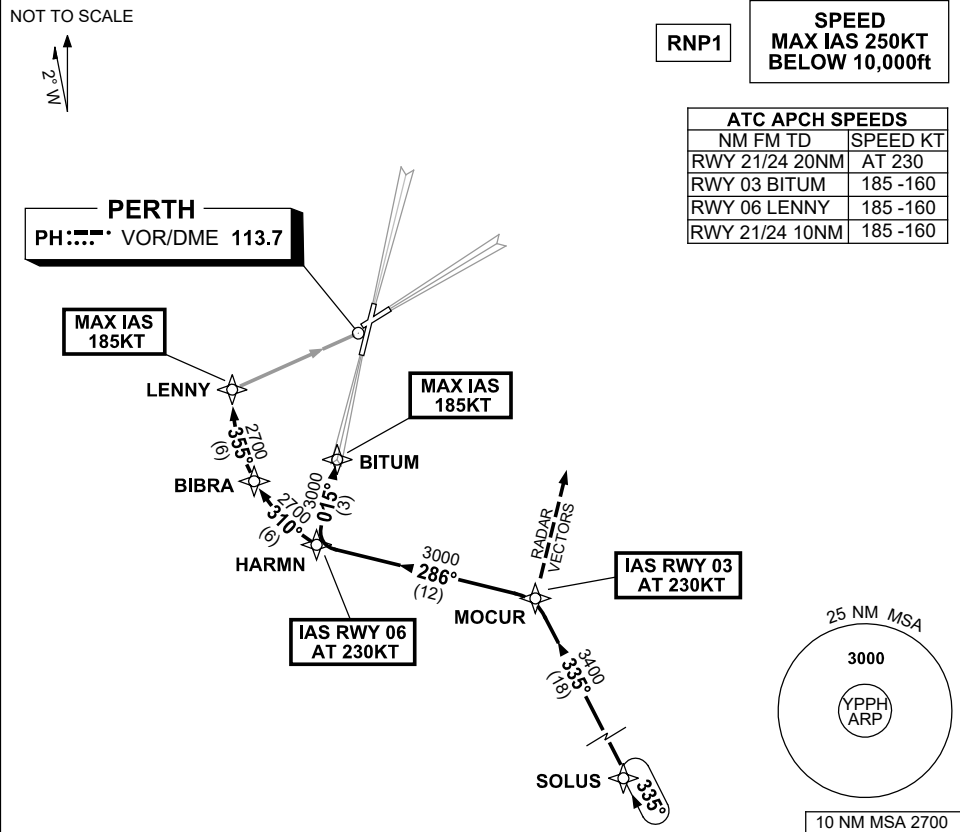


ARRIVAL: SOLUS THREE RWY 03 ALPHA: - From SOLUS, track 335° to MOCUR, IAS AT 230KT from MOCUR - Turn LEFT, track 286° to HARMN, - Turn RIGHT, track 015° to BITUM, for ILS, RNP Z or LOC RWY 03 APPROACH. MAX IAS 185KT from BITUM RWY 21 ALPHA: From SOLUS, track 335° to MOCUR, Expect radar vectors for ILS, RNP or LOC RWY 21 APPROACH.	RWY 06 ALPHA: - From SOLUS, track 335° to MOCUR, - Turn LEFT, track 286° to HARMN, IAS AT 230KT from HARMN - Turn RIGHT, track 310° to BIBRA, - Turn RIGHT, track 355° to LENNY for RNP or VOR RWY 06 APPROACH. MAX IAS 185KT from LENNY RWY 24 ALPHA: From SOLUS, track 335° to MOCUR, Expect radar vectors for ILS, RNP or LOC-RWY 24 APPROACH.
COMMUNICATIONS FAILURE: PROCEDURE IN IMC - Squawk 7600, comply with vertical navigation requirements, but not below MSA. - Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.	

STANDARD INSTRUMENT ARRIVAL (STAR) SAPKO FOUR ALPHA ARRIVALS (NON-JET) (RNAV) RWY 03/06 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7		Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--	--

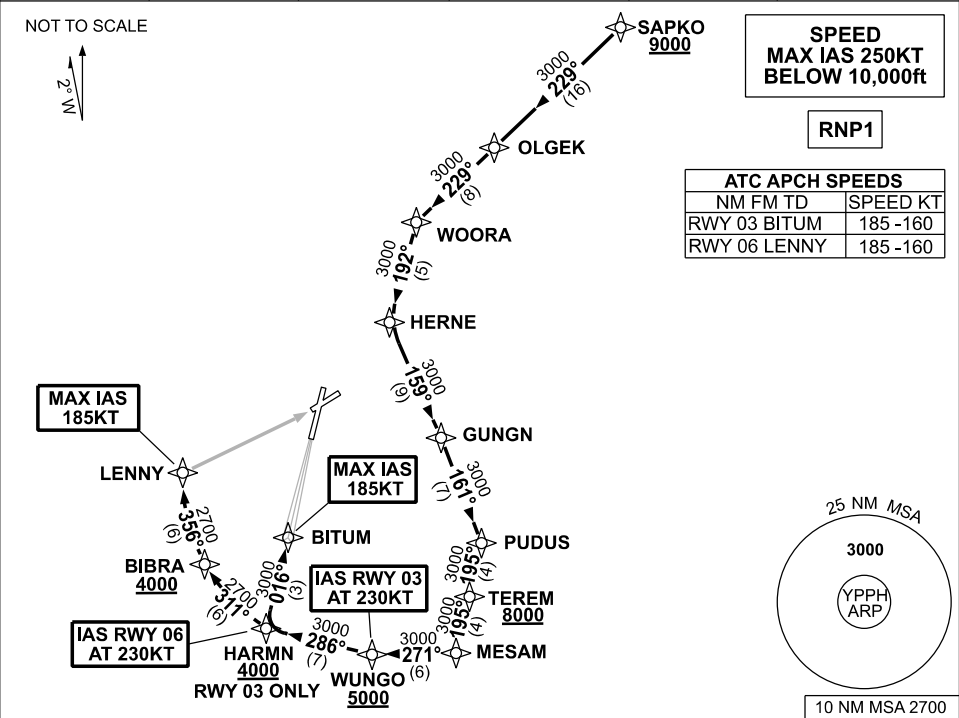

SAPKO FOUR ALPHA ARRIVALS

RWY 03:

- Cross** SAPKO AT or ABV 9000ft
- From SAPKO track 229° to OLGEK
- Track 229° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to GUNGN
- Turn RIGHT track 161° to PUDUS
- Turn RIGHT track 195° to TEREM
- Cross** TEREM AT or ABV 8000ft
- Track 195° to MESAM
- Turn RIGHT track 271° to WUNGO
- Cross** WUNGO AT or ABV 5000ft
- IAS AT 230KT** from WUNGO
- Turn RIGHT track 286° to HARMN
- Cross** HARMN AT or ABV 4000ft
- Turn RIGHT track 016° to BITUM for ILS, RNP Z or LOC RWY 03 APPROACH
- MAX IAS 185KT** from BITUM

RWY 06:

- Cross** SAPKO AT or ABV 9000ft
- From SAPKO track 229° to OLGEK
- Track 229° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to GUNGN
- Turn RIGHT track 161° to PUDUS
- Turn RIGHT track 195° to TEREM
- Cross** TEREM AT or ABV 8000ft
- Track 195° to MESAM
- Turn RIGHT track 271° to WUNGO
- Cross** WUNGO AT or ABV 5000ft
- Turn RIGHT track 286° to HARMN
- IAS AT 230KT** from HARMN
- Turn RIGHT track 311° to BIBRA
- Cross** BIBRA AT or ABV 4000ft
- Turn RIGHT track 356° to LENNY for RNP or VOR RWY 06 APPROACH
- MAX IAS 185KT** from LENNY

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: FROM SUP H09/26.

PPHSR11-187

STANDARD INSTRUMENT ARRIVAL (STAR) JULIM EIGHT VICTOR ARRIVALS (JET) (RNAV) PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--


NOT TO SCALE



RNP1

SPEED
MAX IAS 250KT
BELOW 10,000ft

ATC APCH SPEEDS	
NM FM TD	SPEED KT
RWY 03 SAPUG	AT 230
RWY 06 20NM	AT 230
RWY 03 KARGO	185-160
RWY 06 SAGAR	185-160
5	160-150

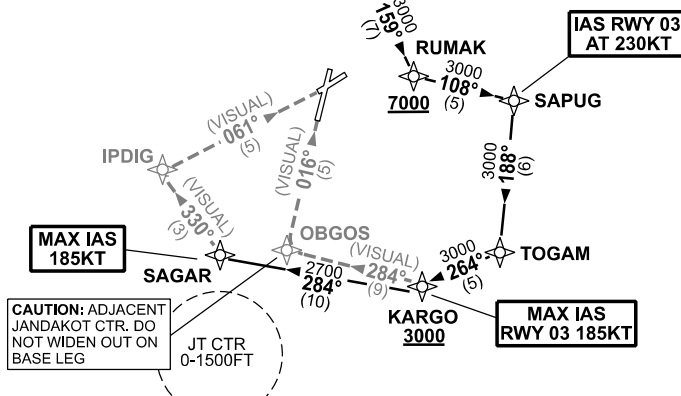

JULIM EIGHT ARRIVALS

- Cross JULIM AT or ABV 9000ft**
 - From JULIM track 211° to YIREE
 - Track 211° to WOORA
 - Turn LEFT track 192° to HERNE
 - Turn LEFT track 159° to RUMAK
- Cross RUMAK AT or ABV 7000ft**
 - Turn LEFT track 108° to SAPUG
- IAS RWY 03 AT 230KT from SAPUG**
 - Turn RIGHT track 188° to TOGAM
 - Turn RIGHT track 264° to KARGO
- Cross KARGO AT or ABV 3000ft**
MAX IAS RWY 03 185KT from KARGO

- RWY 03 VICTOR:** From KARGO,
• Turn RIGHT, track 284° VISUAL to OBGOS for VISUAL final RWY 03
- RWY 06 VICTOR:** From KARGO turn RIGHT, track 284° to SAGAR
MAX IAS 185KT from SAGAR
• Turn RIGHT, track 330° VISUAL to IPDIG for VISUAL final RWY 06

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.


Changes: FROM SUP H09/26.

PPHSR12-187

STANDARD INSTRUMENT ARRIVAL (STAR)
SOLUS THREE VICTOR ARRIVAL (RNAV)
PERTH, WA (YPPH)

13 JUN 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

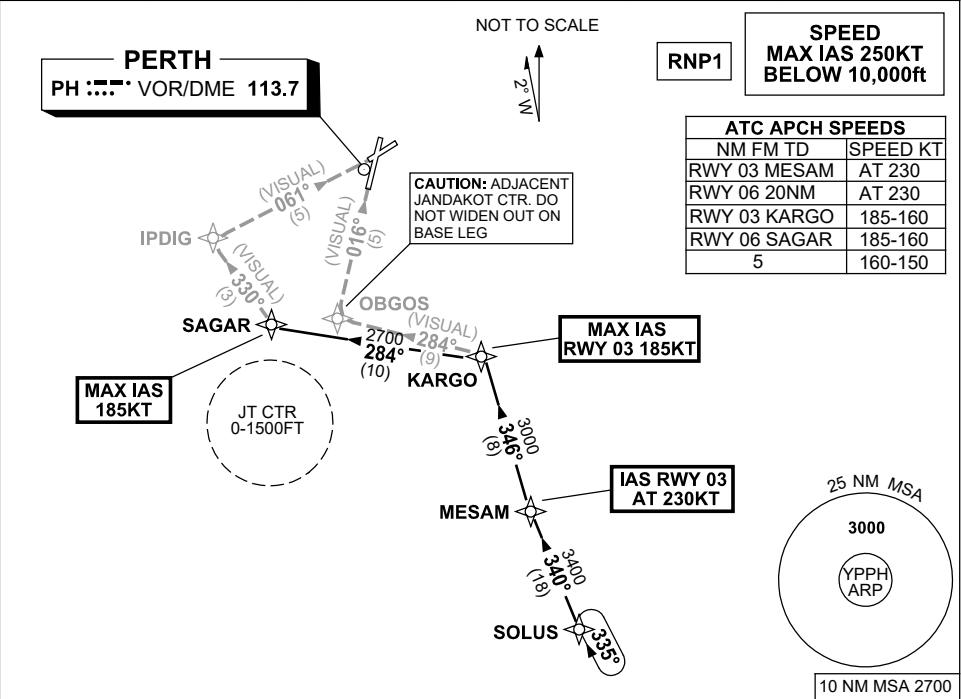


ARRIVAL:	SOLUS THREE - From SOLUS, track 340° to MESAM, IAS RWY 03 AT 230KT from MESAM, - Turn RIGHT, track 346° to KARGO, MAX IAS RWY 03 185KT from KARGO.
RWY 03 VICTOR:	From KARGO turn LEFT, track 284° VISUAL to OBGOS for VISUAL final RWY 03
RWY 06 VICTOR:	From KARGO turn LEFT, track 284° to SAGAR MAX IAS 185KT from SAGAR Turn RIGHT, track 330° VISUAL to IPDIG for VISUAL final RWY 06
COMMUNICATIONS FAILURE: PROCEDURE IN IMC - Squawk 7600, comply with vertical navigation requirements, but not below MSA. - Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.	

STANDARD INSTRUMENT ARRIVAL (STAR)
SOLUS THREE X-RAY ARRIVAL (RNAV)
PERTH, WA (YPPH)

13 JUN 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7		Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--	--

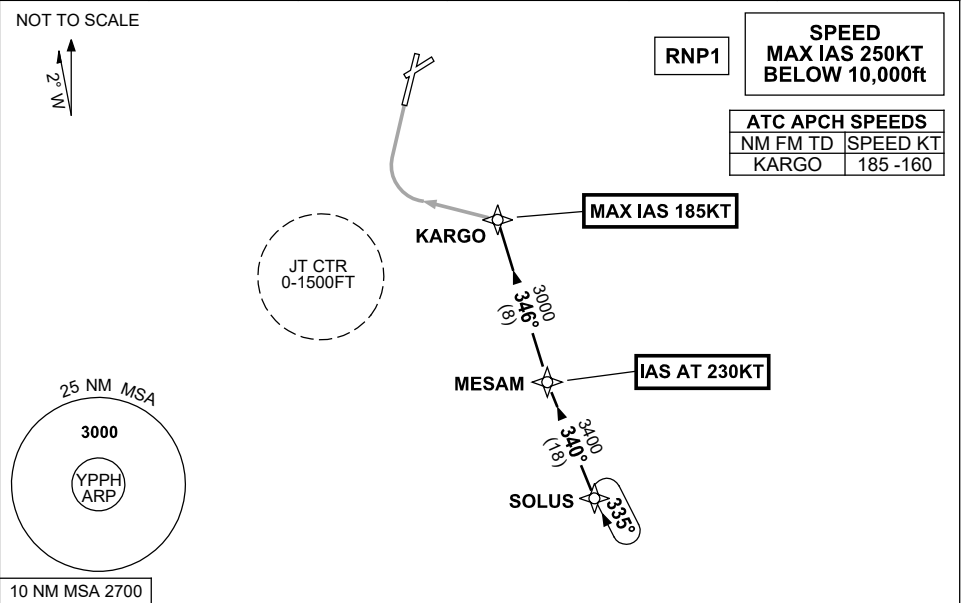

ARRIVAL:

SOLUS THREE

- From SOLUS track 340° to MESAM,
IAS AT 230KT from MESAM,
- Turn RIGHT, track 346° to KARGO,
MAX IAS 185KT from KARGO.

RWY 03 X-RAY: • From KARGO turn LEFT, track via RNP X RWY 03 (AR).

COMMUNICATIONS FAILURE: PROCEDURE IN IMC


- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSa EMERG Section 1.5.

STANDARD INSTRUMENT ARRIVAL (STAR) SAPKO FOUR X-RAY ARRIVALS (NON-JET) (RNAV) PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--

NOT TO SCALE

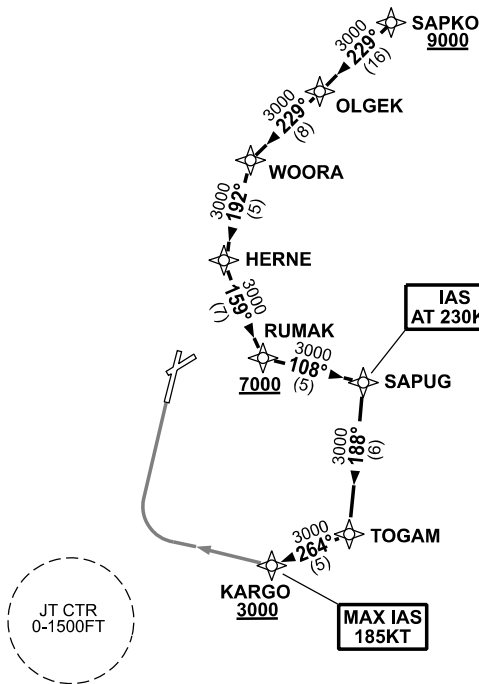


**SPEED
MAX IAS 250KT
BELOW 10,000ft**

RNP1

ATC APCH SPEEDS	
NM FM TD	SPEED KT
KARGO	185 -160

**IAS
AT 230KT**

**MAX IAS
185KT**



10 NM MSA 2700

SAPKO FOUR ARRIVALS

- Cross** SAPKO AT or ABV 9000ft
- From SAPKO track 229° to OLGEK
- Track 229° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to RUMAK
- Cross** RUMAK AT or ABV 7000ft
- Turn LEFT track 108° to SAPUG
- IAS AT** 230KT from SAPUG
- Turn RIGHT track 188° to TOGAM
- Turn RIGHT track 264° to KARGO
- Cross** KARGO AT or ABV 3000ft
- MAX IAS** 185KT from KARGO

RWY 03 X-RAY: From KARGO, turn RIGHT, track via RNP X RWY 03 (AR).

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: FROM SUP H09/26.


PPHSR15-187

STANDARD INSTRUMENT ARRIVAL (STAR) IPMOR TWO ALPHA ARRIVALS (RNAV) RWY 06/24 PERTH, WA (YPPH)

5 SEP 2024

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE

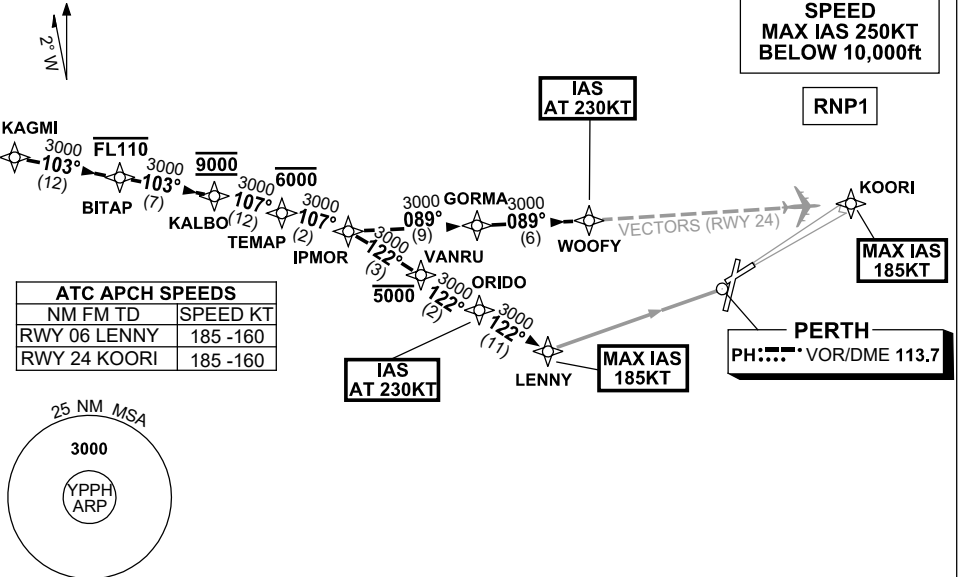

10 NM MSA 2700

KAGMI TRANSITION

- From KAGMI, track 103° to BITAP
Cross BITAP AT or BLW FL110
- Track 103° to KALBO
Cross KALBO AT 9000ft
- Turn RIGHT, track 107° to TEMAP
Cross TEMAP AT or BLW 6000ft
- Track 107° to IPMOR
- Then follow ARRIVAL Instructions.

ARRIVAL: IPMOR TWO ALPHA

RWY 06:

- Turn RIGHT, track 122° to VANRU
Cross VANRU AT or BLW 5000ft
- Track 122° to ORIDO
IAS AT 230KT from ORIDO
- Track 122° to LENNY
for RNP or VOR RWY 06 APCH
MAX IAS 185KT from LENNY.

RWY 24:

- Turn LEFT, track 089° to GORMA
- Track 089° to WOOFY,
IAS AT 230KT from WOOFY
- Expect radar vectors for ILS,
RNP or LOC RWY 24 APPROACH
MAX IAS 185KT from KOORI

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: RWY 03/21 TRANSITIONS DEPICTED ON NEW CHART.

PPHSR17-180

5 SEP 2024

NOT TO SCALE



- ARRIVAL: IPMOR TWO ALPHA**

RWY 03:

- Turn RIGHT, track 153° to HAYCO
 - Turn LEFT, track 102° to SADOL
 - **IAS AT 230KT** from SADOL
 - Track 102° to HARMN
 - Turn LEFT, track 015° to BITUM
- for ILS, RNP Z or LOC
RWY 03 APPROACH
MAX IAS 185KT from BITUM

RWY 21:

- Turn LEFT, track 089° to GORMA
- Track 089° to WOOFY
for ILS, RNP, LOC or
VOR RWY 21 APPROACH
IAS AT 230KT from WOOFY
MAX IAS 185KT from HAIGH


- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

PPHSR18-180

STANDARD INSTRUMENT ARRIVAL (STAR)
JULIM EIGHT X-RAY ARRIVAL(JET) (RNAV)
PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7		Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--	--

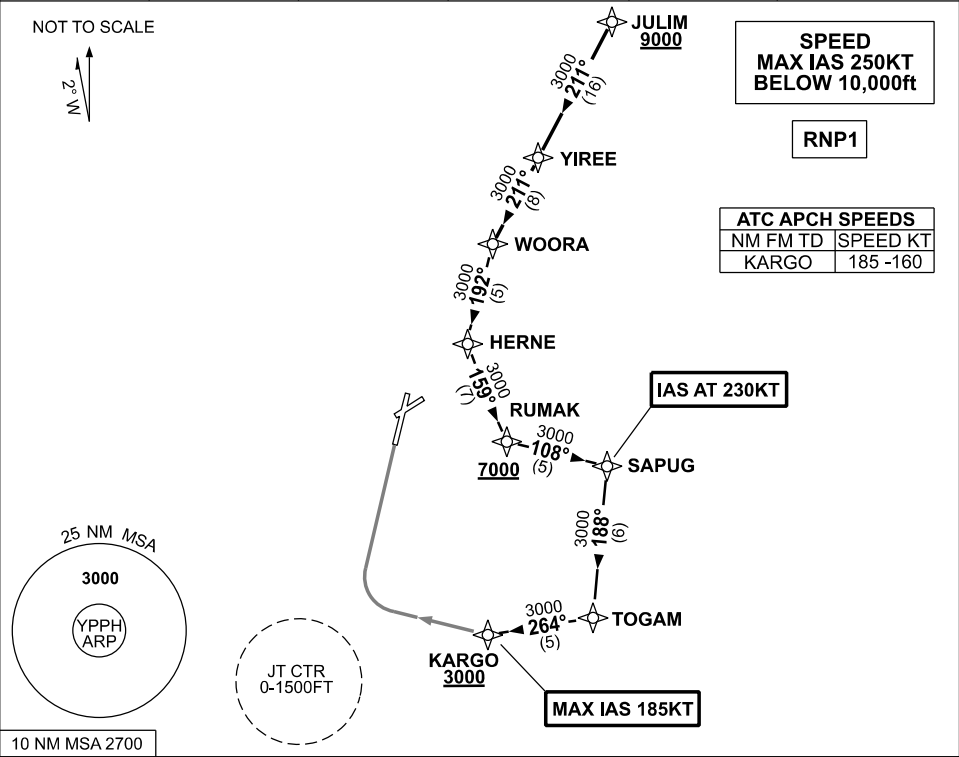

JULIM EIGHT ARRIVAL

- Cross** JULIM AT or ABV 9000ft
- From JULIM track 211° to YIREE
- Track 211° to WOORA
- Turn LEFT track 192° to HERNE
- Turn LEFT track 159° to RUMAK
- Cross** RUMAK AT or ABV 7000ft
- Turn LEFT track 108° to SAPUG
- IAS AT 230KT** from SAPUG
- Turn RIGHT track 188° to TOGAM
- Turn RIGHT track 264° to KARGO
- Cross** KARGO AT or ABV 3000ft
- MAX IAS 185KT** from KARGO

RWY 03 X-RAY: • From KARGO turn RIGHT, track via RNP X RWY 03 (AR).

COMMUNICATIONS FAILURE: PROCEDURE IN IMC


- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

STANDARD INSTRUMENT ARRIVAL (STAR) KABLI THREE VICTOR ARRIVAL (JET) (RNAV) PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE

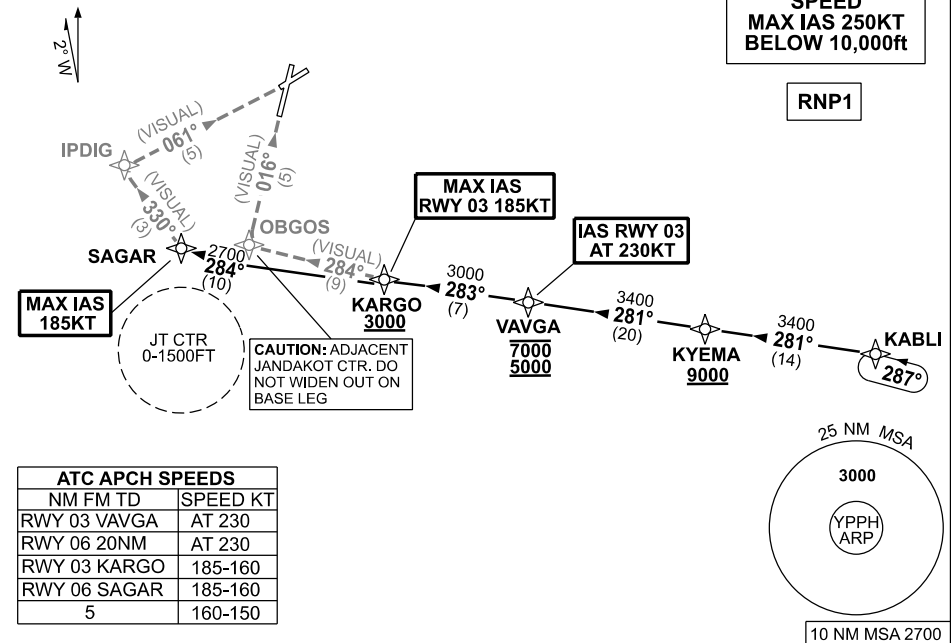

KABLI THREE ARRIVAL

- From KABLI track 281° to KYEMA
Cross KYEMA AT or ABV 9000ft
- Track 281° to VAVGA
Cross VAVGA BTN 5000ft and 7000ft
IAS RWY 03 AT 230KT from VAVGA
- Turn RIGHT track 283° to KARGO
Cross KARGO AT or ABV 3000ft
MAX IAS RWY 03 185KT from KARGO

RWY 03 VICTOR: • From KARGO track 284° VISUAL to OBGOS for VISUAL final RWY 03

RWY 06 VICTOR: • From KARGO track 284° to SAGAR
MAX IAS 185KT from SAGAR
• Turn RIGHT, track 330° VISUAL to IPDIG for VISUAL final RWY 06

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.


Changes: FROM SUP H09/26.

PPHSR21-187

STANDARD INSTRUMENT ARRIVAL (STAR)
KABLI THREE X-RAY ARRIVAL (JET) (RNAV)
PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

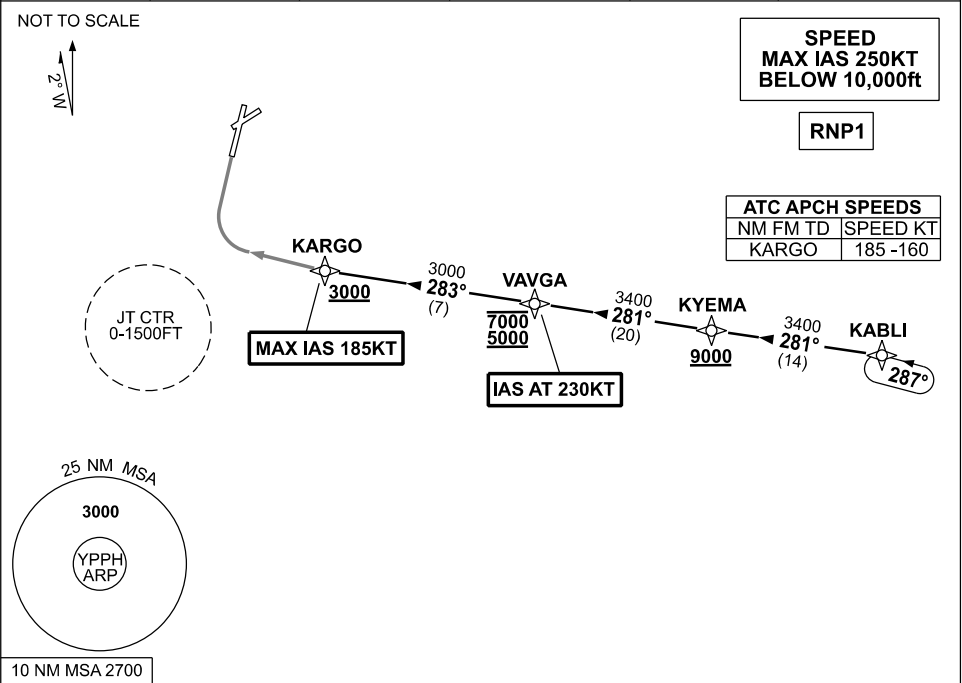

KABLI THREE ARRIVAL

- From KABLI track 281° to KYEMA
Cross KYEMA AT or ABV 9000ft
- Track 281° to VAVGA
Cross VAVGA BTN 5000ft and 7000ft
IAS AT 230KT from VAVGA
- Turn RIGHT, track 283° to KARGO
Cross KARGO AT or ABV 3000ft
MAX IAS 185KT from KARGO

RWY 03 X-RAY: • From KARGO track via RNP X RWY 03 (AR).

COMMUNICATIONS FAILURE: PROCEDURE IN IMC


- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSa EMERG Section 1.5.

STANDARD INSTRUMENT ARRIVAL (STAR) KABLI THREE ALPHA ARRIVALS (JET) (RNAV) RWY 21/24 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE

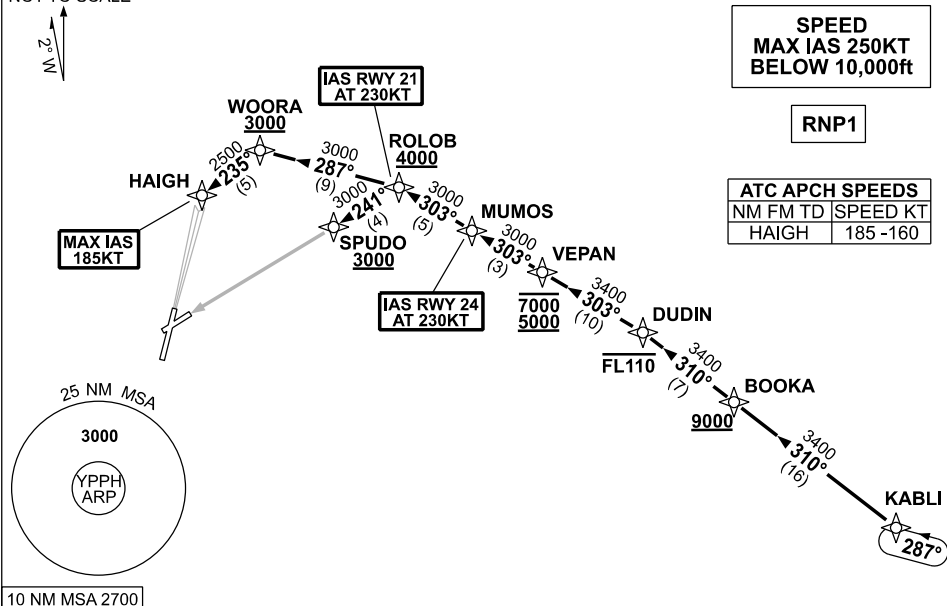

KABL3 THREE ALPHA ARRIVAL

RWY 21:

- From KABLI, track 310° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Track 310° to DUDIN
Cross DUDIN AT or BLW FL110
- Turn LEFT, track 303° to VEPAN
Cross VEPAN BTN 5000ft and 7000ft
- Track 303° to MUMOS
- Track 303° to ROLOB
Cross ROLOB AT or ABV 4000ft
IAS AT 230KT from ROLOB
- Turn LEFT, track 287° to WOORA
Cross WOORA AT or ABV 3000ft
- Turn LEFT, track 235° to HAIGH
for ILS, RNP or
LOC RWY 21 APPROACH
MAX IAS 185KT from HAIGH

RWY 24:

- From KABLI, track 310° to BOOKA
Cross BOOKA AT or ABV 9000ft
- Track 310° to DUDIN
Cross DUDIN AT or BLW FL110
- Turn LEFT, track 303° to VEPAN
Cross VEPAN BTN 5000ft and 7000ft
- Track 303° to MUMOS
IAS AT 230KT from MUMOS
- Track 303° to ROLOB
Cross ROLOB AT or ABV 4000ft
- Turn LEFT, track 241° to SPUDO
for RNP RWY 24 APPROACH.
Cross SPUDO AT or ABV 3000ft

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: FROM SUP H09/26.

PPHSR23-187

STANDARD INSTRUMENT ARRIVAL (STAR) JULIM EIGHT ALPHA ARRIVALS (JET) (RNAV) RWY 21/24 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--


NOT TO SCALE



**SPEED
MAX IAS 250KT
BELOW 10,000ft**

RNP1

ATC APCH SPEEDS			
NM	FM	TD	SPEED KT
RWY 21 HAIGH			185 -160

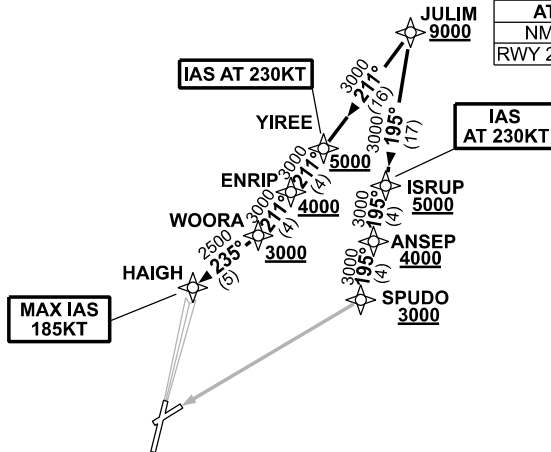

10 NM MSA 2700

JULIM EIGHT ALPHA ARRIVAL

RWY 21:

- **Cross** JULIM AT or ABV 9000ft
- From JULIM, track 211° to YIREE
- **Cross** YIREE AT or ABV 5000ft
- **IAS AT 230KT** from YIREE
- Track 211° to ENRIP
- **Cross** ENRIP AT or ABV 4000ft
- Track 211° to WOORA
- **Cross** WOORA AT or ABV 3000ft
- Turn RIGHT, track 235° to HAIGH
- for ILS, RNP or LOC RWY 21 APPROACH
- MAX IAS 185KT from HAIGH

RWY 24:

- **Cross** JULIM AT or ABV 9000ft
- From JULIM, track 195° to ISRUP
- **Cross** ISRUP AT or ABV 5000ft
- **IAS AT 230KT** from ISRUP
- Track 195° to ANSEP
- **Cross** ANSEP AT or ABV 4000ft
- Track 195° to SPUDO
- for RNP RWY 24 APPROACH.
- **Cross** SPUDO AT or ABV 3000ft

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.


Changes: FROM SUP H09/26.

PPHSR24-187

STANDARD INSTRUMENT ARRIVAL (STAR) SAPKO FOUR ALPHA ARRIVALS (NON-JET) (RNAV) RWY 21/24 PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6 132.95	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	---------------------	--------------	---	--

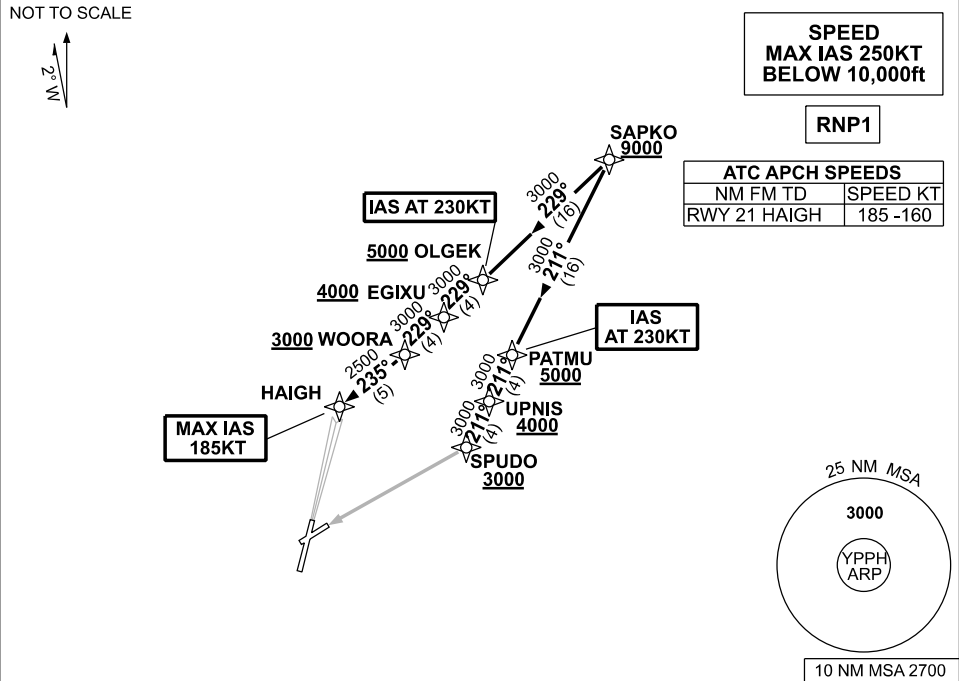

SAPKO FOUR ALPHA ARRIVALS

RWY 21:

- Cross** SAPKO AT or ABV 9000ft
- From SAPKO track 229° to OLGEK
- Cross** OLGEK AT or ABV 5000ft
- IAS AT 230KT** from OLGEK
- Track 229° to EGIXU
- Cross** EGIXU AT or ABV 4000ft
- Track 229° to WOORA
- Cross** WOORA AT or ABV 3000ft
- Turn RIGHT track 235° to HAIGH for ILS, RNP or LOC RWY 21 APPROACH
- MAX IAS 185KT from HAIGH

RWY 24:

- Cross** SAPKO AT or ABV 9000ft
- From SAPKO track 211° to PATMU
- Cross** PATMU AT or ABV 5000ft
- IAS AT 230KT** from PATMU
- Track 211° to UPNIS
- Cross** UPNIS AT or ABV 4000ft
- Track 211° to SPUDO for RNP RWY 24 APPROACH
- Cross** SPUDO AT or ABV 3000ft

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: FROM SUP H09/26.


PPHSR25-187

STANDARD INSTRUMENT ARRIVAL (STAR)
LAVEX THREE ALPHA ARRIVALS (NON-JET) (RNAV) RWY 21/24
PERTH, WA (YPPH)

09 JUL 2026

ATIS 113.7 123.8	APP 123.6	TWR 127.4	SMC E of RWY 03/21 122.2 W of RWY 03/21 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	---	--

NOT TO SCALE

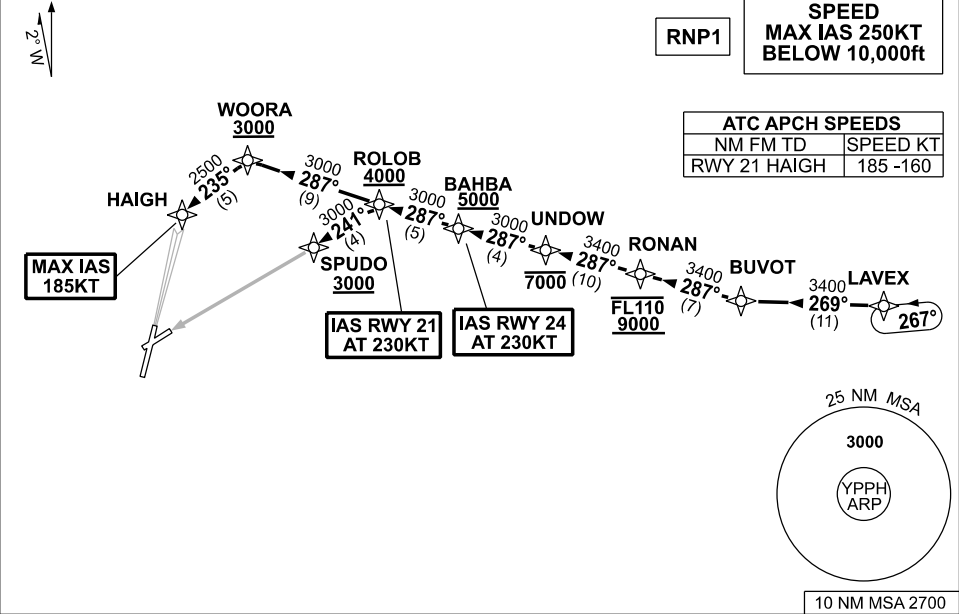

LAVEX THREE ALPHA ARRIVALS

RWY 21:

- From LAVEX track 269° to BUVOT
- Turn RIGHT track 287° to RONAN
Cross RONAN BTN 9000ft and FL110
- Track 287° to UNDOWN
Cross UNDOWN AT or BLW 7000ft
- Track 287° to BAHBA
Cross BAHBA AT or ABV 5000ft
- Track 287° to ROLOB
Cross ROLOB AT or ABV 4000ft
IAS AT 230KT from ROLOB
- Track 287° to WOORA
Cross WOORA AT or ABV 3000ft
- Turn LEFT, track 235° to HAIGH
for ILS, RNP or
LOC RWY 21 APPROACH
MAX IAS 185KT from HAIGH

RWY 24:

- From LAVEX track 269° to BUVOT
- Turn RIGHT track 287° to RONAN
Cross RONAN BTN 9000ft and FL110
- Track 287° to UNDOWN
Cross UNDOWN AT or BLW 7000ft
- Track 287° to BAHBA
Cross BAHBA AT or ABV 5000ft
IAS AT 230KT from BAHBA
- Track 287° to ROLOB
Cross ROLOB AT or ABV 4000ft
- Turn LEFT track 241° to SPUDO
for RNP RWY 24 APPROACH
Cross SPUDO AT or ABV 3000ft

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.



Changes: FROM SUP H09/26.

PPHSR26-187

USE QNH

VOR RWY 03
PERTH, WA (YPPH)

12 JUN 2025

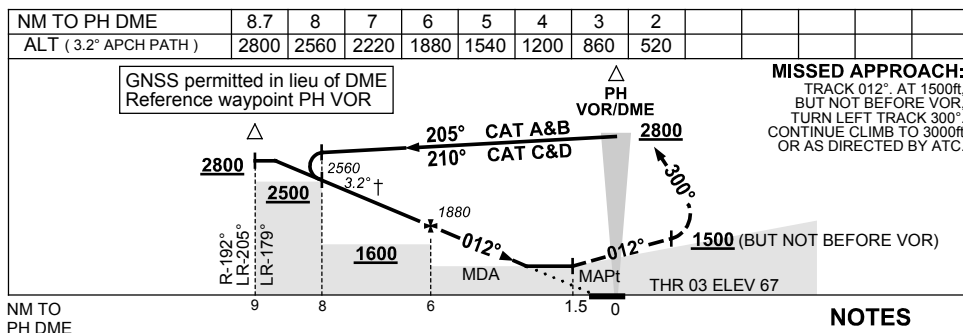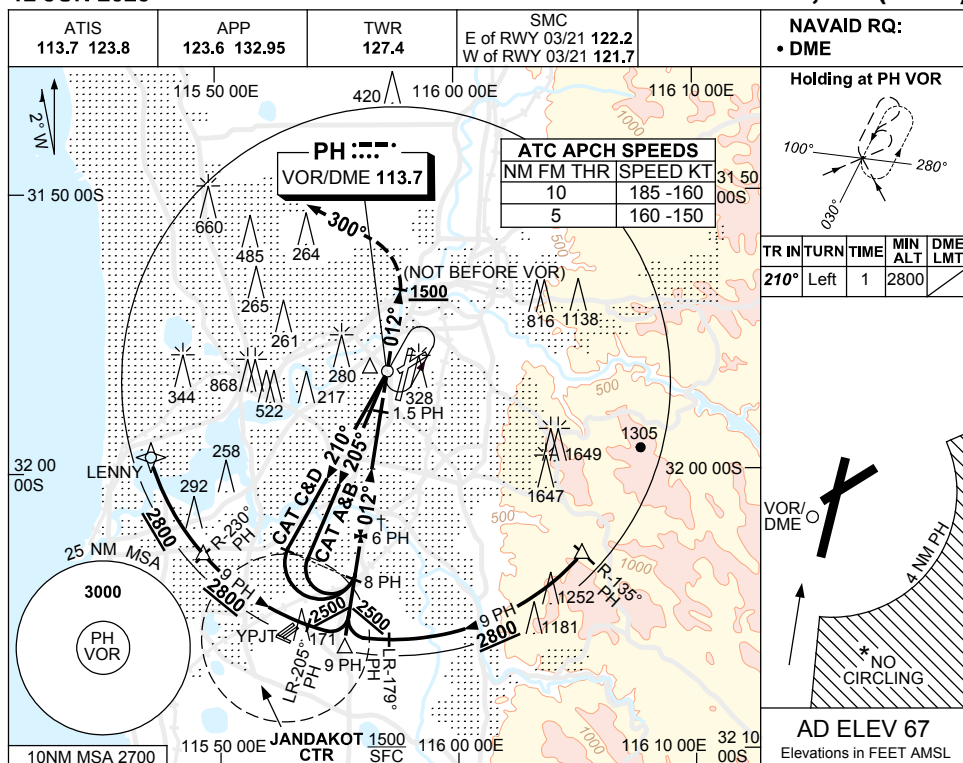

NOTES

* 1. NO CIRCLING CAT C&D

ACFT BEYOND 4NM PH E OF RWY 03/21 AND 06/24.

† 2. ACFT MAY BE RADAR VECTORED TO FNA.

* 3. SPECIAL ALTN MNM NOT APPLICABLE.

4. COLOUR: SEE SPEC NOTICES.

CATEGORY	A	B	C	D
S-I VOR/DME	520 (453-1.5)			
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE *	(1193-4.4)	(1873-6.0)	(1873-7.0)	



Changes: YPJAT ABN DCMSD, Editorial.

PPHV001-183

USE QNH

VOR RWY 06
PERTH, WA (YPPH)

12 JUN 2025

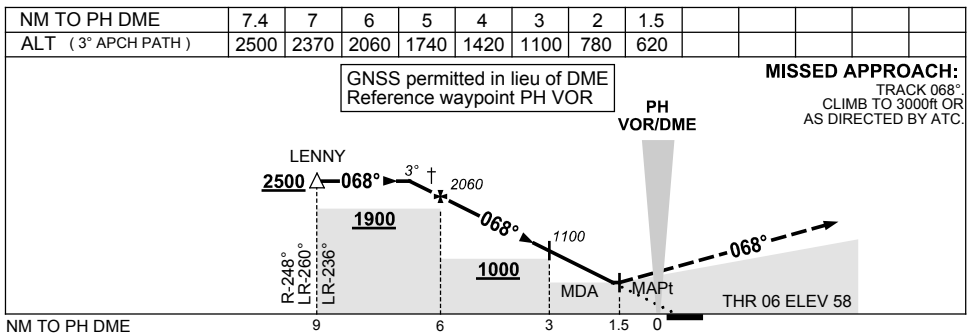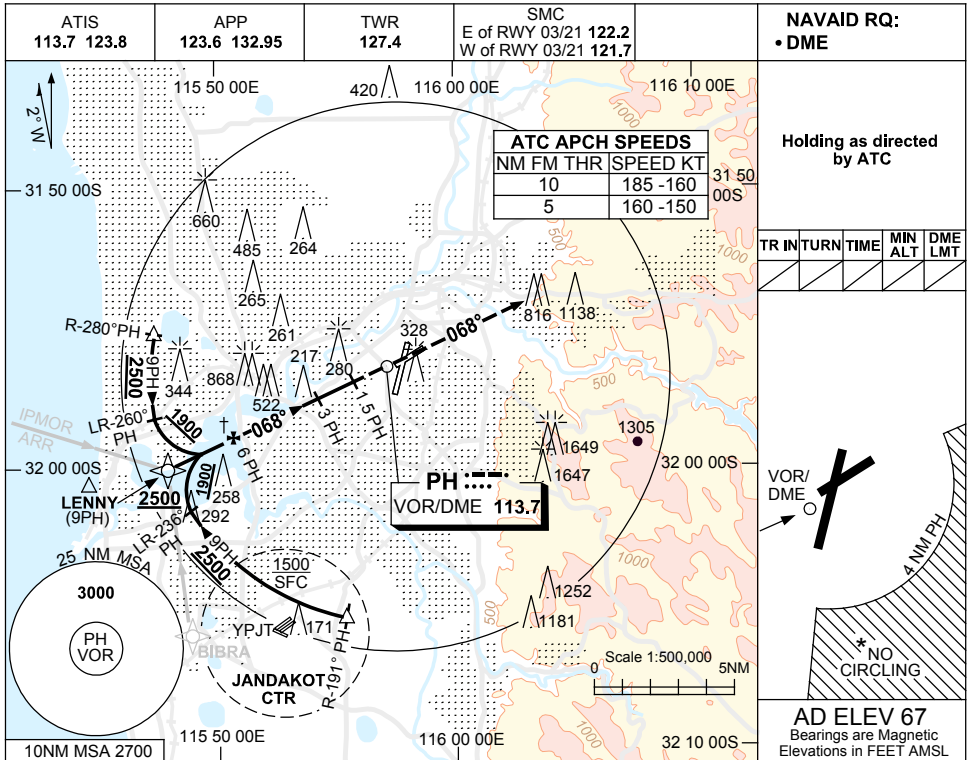

NOTES

- * 1. NO CIRCLING CAT C&D
ACFT BEYOND 4NM
PH E OF RWY 03/21
AND 06/24.
- † 2. ACFT MAY BE RADAR
VECTORED TO FNA.
- * 3. SPECIAL ALTN MNM
NOT APPLICABLE.
- 4. **COLOUR:** SEE
SPEC NOTICES.

CATEGORY	A	B	C	D
S-I VOR/DME	620 (562-3.2)			
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE *	(1193-4.4)	(1873-6.0)	(1873-7.0)	



Changes: YPJT ABN DCMSD, Editorial.

PPHVO02-183

USE QNH

VOR RWY 21
PERTH, WA (YPPH)

12 JUN 2025

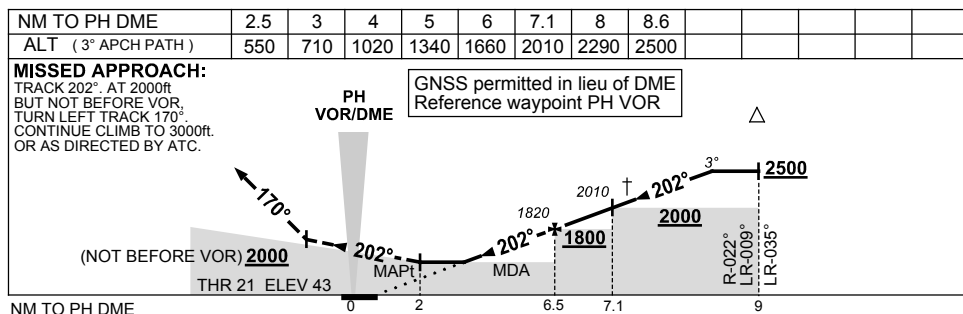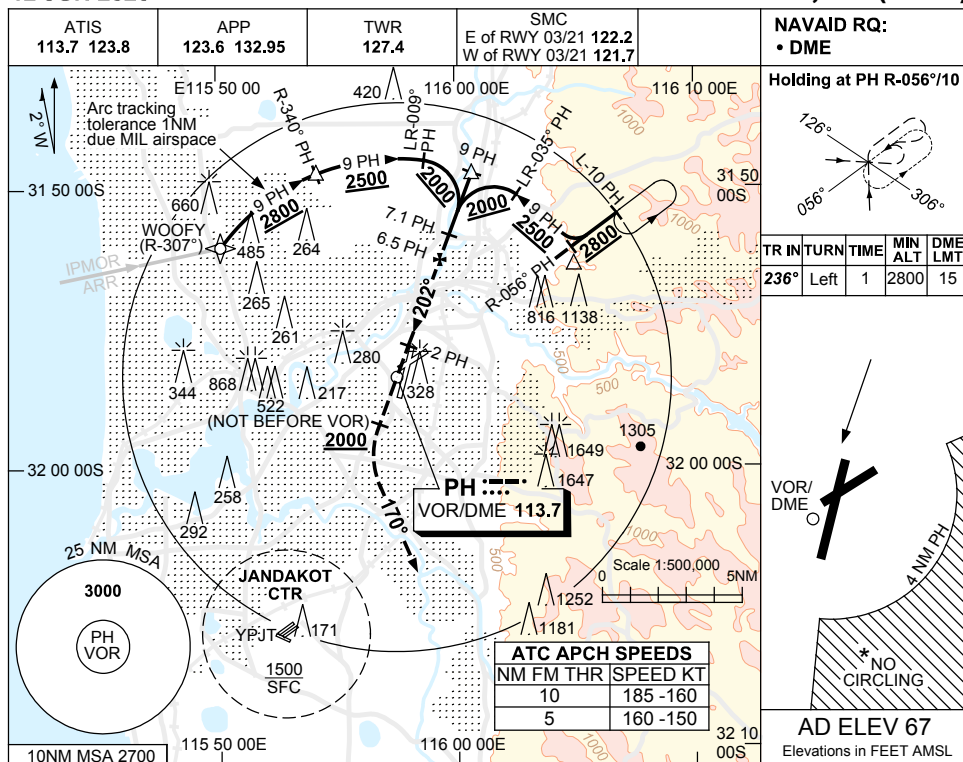

NM TO PH DME

CATEGORY	A	B	C	D
S-I VOR/DME	550 (507-2.9)			
CIRCLING *	760 (693-2.4)	1440 (1373-4.0)	1440 (1373-5.0)	
ALTERNATE *	(1193-4.4)	(1873-6.0)	(1873-7.0)	

- *1. NO CIRCLING CAT C&D
ACFT BEYOND 4NM
PH E OF RWY 03/21
AND RWY 06/24.
- †2. ACFT MAY BE RADAR
VECTORED TO FNA.
- *3. SPECIAL ALTN MNM
NOT APPLICABLE.
4. COLOUR: SEE
SPEC NOTICES.



Changes: YPJT ABN DCMSD, Editorial.

PPHV003-183

USE QNH

VOR RWY 24
PERTH, WA (YPPH)

12 JUN 2025

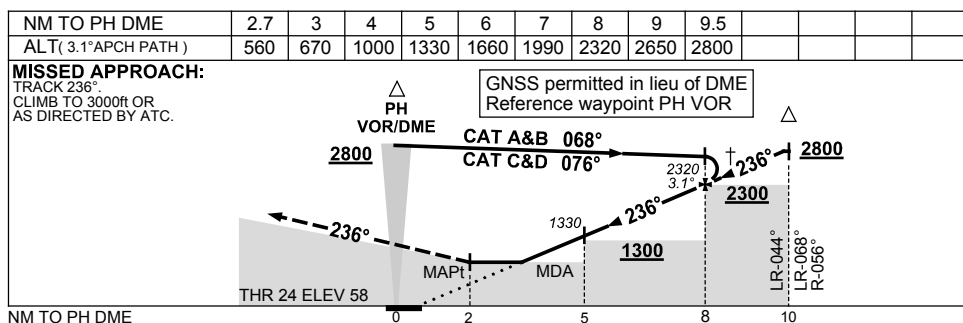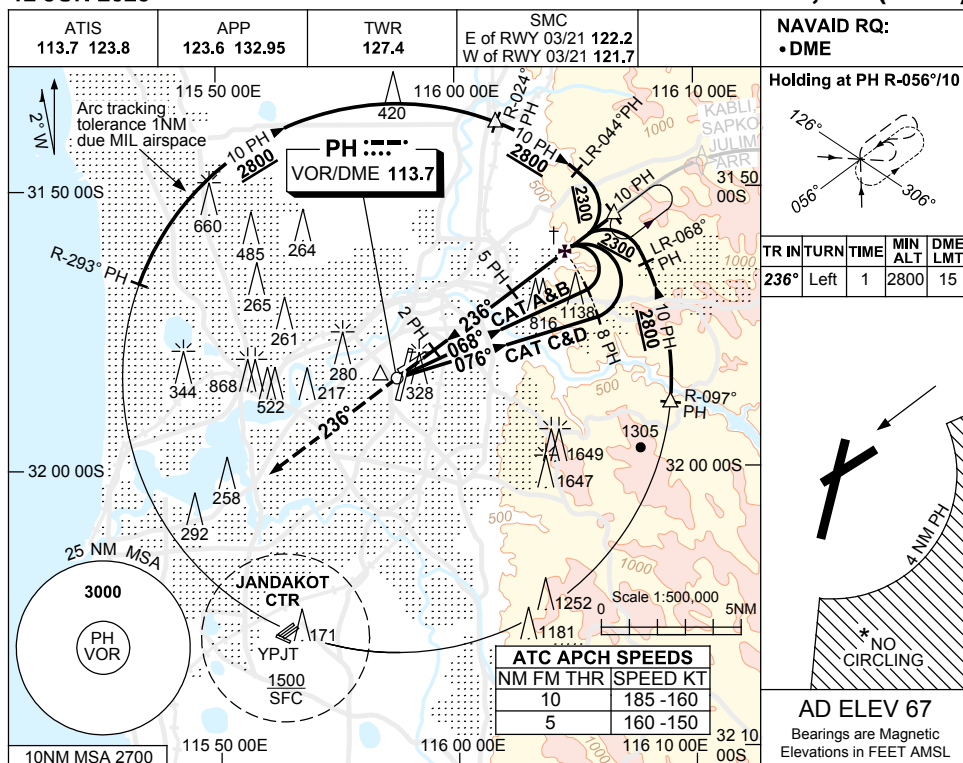

NOTES

- *1. NO CIRCLING CAT C&D ACFT BEYOND 4NM PH E OF RWY 03/21 AND 06/24.
- †2. ACFT MAY BE RADAR VECTORED TO FNA.
- *3. SPECIAL ALTN MNM NOT APPLICABLE.
- 4. COLOUR: SEE SPEC NOTICES.

Changes: YPJT ABN DCMSD, Editorial.

PPHVO04-183