



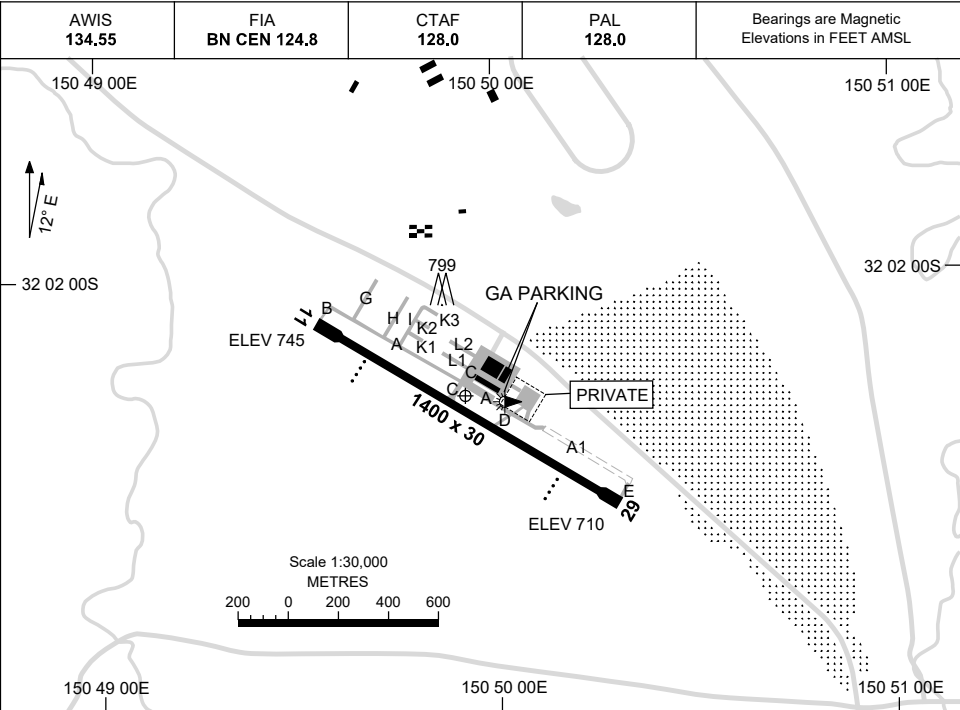


		AERODROME LIGHTING	
RWY		TAXIWAY : BLUE EDGE ON TWY C RL : PAL 128.0	
11	110	LIRL PAPI RIGHT SIDE 3.0° 45FT	
290	29	LIRL PAPI LEFT SIDE 3.0° 46FT	
NOTES			
1. CAUTION: THE PILOT IN COMMAND SHOULD BE AWARE OF THE TERRAIN AND OBSTACLES IN THE CIRCLING AREA PRIOR TO CONDUCTING NIGHT IFR OPERATIONS INTO SCONE.			
2. AWIS RQ 1 SEC TRANSMIT PULSES TO ACTIVATE.			
3. FIA FREQ 124.8 AVBL 4000FT.			
4. PAL RQ THREE ONE SECOND PULSES TO ACTIVATE.			

USE QNH

RNP RWY 29
SCONE, NSW (YSCO)

03 SEP 2026

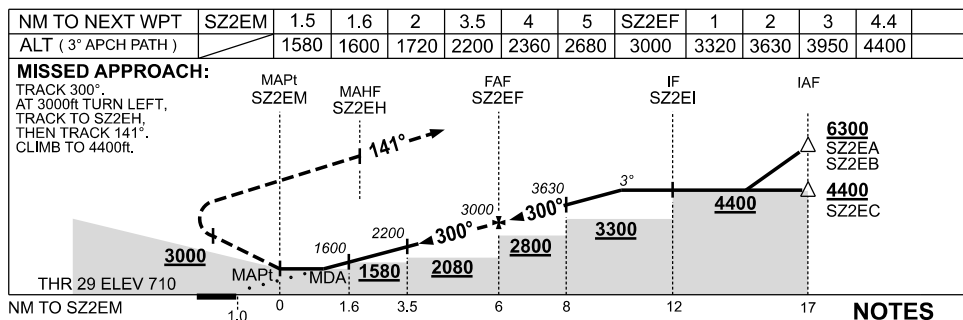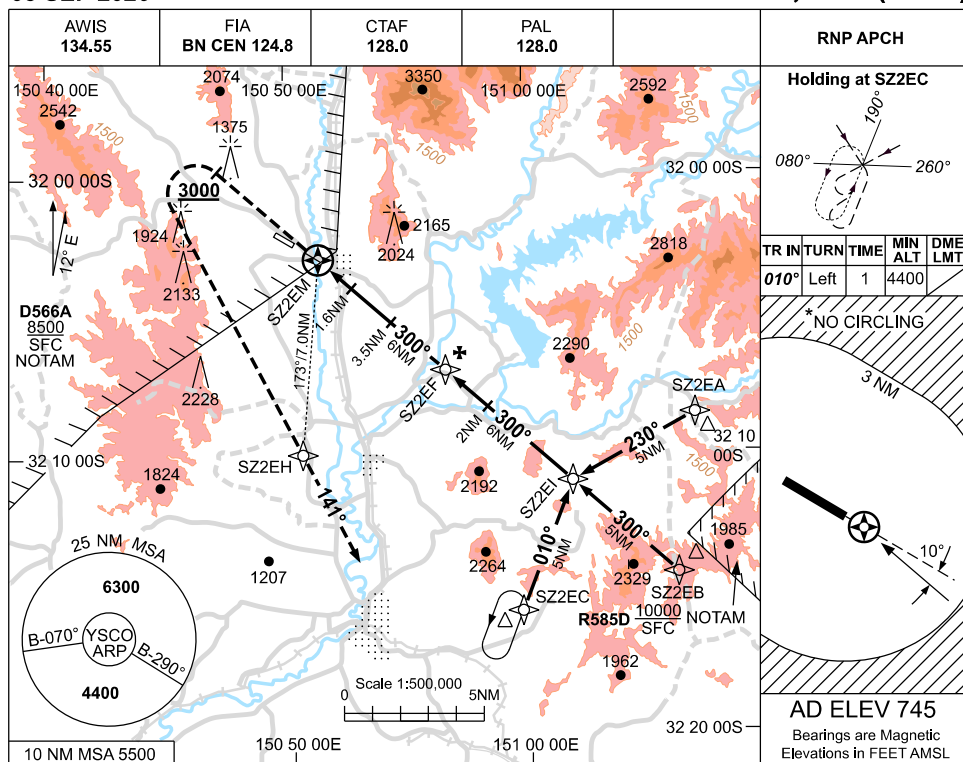

NOTES

- MAX IAS:
INITIAL : 210KT.
MISSED APCH
TURN : 200KT.
CAT C
- CIRCLING : 140KT
* NO CIRCLING
BEYOND 3NM.
- CLR MAY BE REQ
WHEN R585D ACT.
(WLM APP 135.7)
- COLOUR: SEE
SPEC NOTICES.

CATEGORY	A	B	C	D
LNAV	1580 (870-5.0)			NOT APPLICABLE
CIRCLING *	2040 (1295-2.4)		2530 (1785-4.0)	
ALTERNATE	(1795-4.4)		(2285-6.0)	

Changes: WPT NAMING CONVENTION, CAT C CIRCLING SPEED.

SCOGN01-188