

MOUNT HOLLAND**ELEV 1462****AVFAX CODE 6315**

WA

UTC +8

YMHL

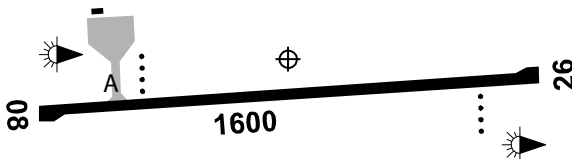
320630S

1194536E

VAR 0 DEG W

CERT

AD OPR Covalent Lithium Pty Ltd, L3, 109 St Georges Tce, Perth, WA, 6000. Email: mth.aerodrome@covalentlithium.com. PH Site Contact: 08 9230 5400. ARO or AD MGR 0437 721 944 (H24). Website: www.covalentlithium.com.

**REMARKS**

Restricted Operations. PPR from AD MGR/ARO.

HANDLING SERVICES AND FACILITIES

Marshalling, parking allocation and ground handling services by prior arrangement with AD MGR.

APRONS AND TAXIWAYS

TWY A - Code C, WID 23M. Apron and TWY PCN 20/F/D/Y/T Bitumen.

AERODROME OBSTACLES

1. Lit tower 1,622FT AMSL BRG 51 DEG MAG 0.51NM FM ARP. Infringes inner HZS by 23FT.
2. Unlit tower, 1,777FT AMSL BRG 345.7 DEG MAG 1.58NM FM ARP. Infringes inner HZS by 177FT.
3. Power pole, 1,623FT AMSL BRG 279 DEG MAG 1.15NM FM ARP. Infringes inner HZS by 23FT.

PHYSICAL CHARACTERISTICS

08/26 085 52a PCN 20 /F /D /980 (142PSI) /T

WID 30 RWS 140

AERODROME AND APPROACH LIGHTING

RWY 08/26 LIRL

AFRU+PAL 126.4

RWY 08/26 PAPI(1)

AFRU+PAL 126.4

3.0 DEG40.4FT

(1) Left side.

OTHER LIGHTING

TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE

125.4 3500FT

LOCAL TRAFFIC REGULATIONS

1. All fixed wing ACFT ABV 5,700KG must make MAX RAD turns at MNM speed at turn pads to avoid SFC damage.
2. Itinerant PRKG CTC AD MGR/ARO.
3. All ACFT to follow APN markings.
4. All jet ACFT to use idle power for movements on the APN with the exception of breakaway thrust to initiate taxi.

FLIGHT PROCEDURES

Right hand CCTS on RWY 08.

CTAF - AFRU 126.4

ADDITIONAL INFORMATION

CAUTION: Blasting occurs to the N of the AD. Dust plumes may occur following blasting. Contact ARO for more details.

CHARTS RELATED TO THE AERODROME

1. WAC 3462.
2. Also refer to AIP Departure and Approach Procedures.

This page is intentionally blank.