

**MOUNT KEITH****ELEV 1792****AVFAX CODE 6605**

WA

UTC +8

YMNE

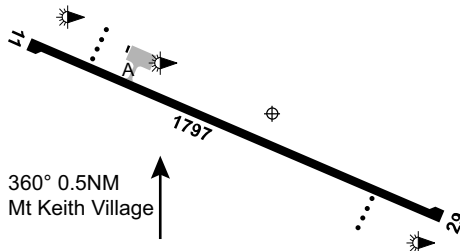
271711S

1203317E

VAR 1 DEG E

CERT

AD OPR BHP Nickel West Pty Ltd (Mount Keith), PO Box 238, Welshpool Delivery Centre, WA, 6986. Email: mountkeithaerodrome@bhp.com. PH AD MGR 0429 009 941. Email: david.silvello@bhp.com. ARO 0499 821 780: 08 9037 8748 (H24).

**REMARKS**

1. PPR for all OPS. Email ARO.
2. AD charges: ALL ACFT.

**HANDLING SERVICES AND FACILITIES**

BHP. CTC ARO. JET A1 only. Payment method via account or credit card.

**PASSENGER FACILITIES**

LG/RF/WC

**AERODROME OBSTACLES**

1. Unlit terrain:
  - a. 2,024FT AMSL BTN BRG 327-332 DEG MAG 4,453M FM ARP.
  - b. 1,998FT AMSL BRG 002 DEG MAG 4,355M FM ARP.
2. Unlit earth bund:
  - a. 8FT AGL BRG 205 DEG MAG 10M FM ARP. Infringes transitional SFC by 1FT.
  - b. 8FT AGL BRG 285 DEG MAG 1,005M FM ARP. Infringes transitional SFC by 3FT.
3. Unlit fence 6FT AGL BRG 115 DEG MAG 20M FM ARP. Infringes transitional SFC by 3FT.
4. Unlit mast 2,200FT AMSL BRG 002 DEG MAG 5,132M FM ARP. Infringes COS by 133FT.

**METEOROLOGICAL INFORMATION PROVIDED**

1. METAR/SPECI.
2. AWIS FREQ 133.15 - Report faults to BHP Nickel West 08 9037 8748.

**PHYSICAL CHARACTERISTICS**

11/29 113 59a PCN 24 /F /A /1000 (145PSI) /T

WID 30 RWS 150

**AERODROME AND APPROACH LIGHTING**

RWY 11/29 LIRL(1)

SDBY PWR AVBL

RWY 11/29 PAPI(2)

3.0 DEG42FT

SDBY PWR AVBL

(1) HN

(2) Left side. Activated H24.

**OTHER LIGHTING**

1. SDBY PWR switchover time: 15 SEC.
2. TWY LGT: Blue edge.
3. TWY holding point LGT: 2 x orange.

**ATS AND AERODROME COMMUNICATION FACILITIES**

FIA MELBOURNE CENTRE

118.95 On Ground

UNICOM MOUNT KEITH UNICOM

126.5

---

**LOCAL TRAFFIC REGULATIONS**

1. 180 DEG turns at RWY ends only. MAX RAD MNM speed.
2. ACFT must be at taxiing speed when turning into and out of TWY/RWY.
3. ACFT ABV 5,700KG must taxi off RWY CL and roll past TWY/RWY INT until taxiing speed achieved. ACFT must follow lead in lines.
4. BAE 146/RJ ACFT to use F70 lead in line.
5. Q400 ACFT to use F100 lead in taxi line on APN.

**FLIGHT PROCEDURES**

Right hand CCTS required when OPR RWY 11.

**CTAF - AFRU** 126.5

AFRU not AVBL on ground.

**ADDITIONAL INFORMATION**

1. Blasting HJ:
  - a. BRG 348 DEG MAG 3.4NM FM ARP. SFC to 2,000FT AGL. CTC ARO for blasting times.
  - b. BRG 170 DEG MAG 9.1NM FM ARP. SFC to 2,000FT AGL. CTC ARO for blasting times.
2. Wildlife hazards increase following rainfall events - typically between January and June.

**CHARTS RELATED TO THE AERODROME**

1. WAC 3345.
  2. Also refer to AIP Departure and Approach Procedures
-