


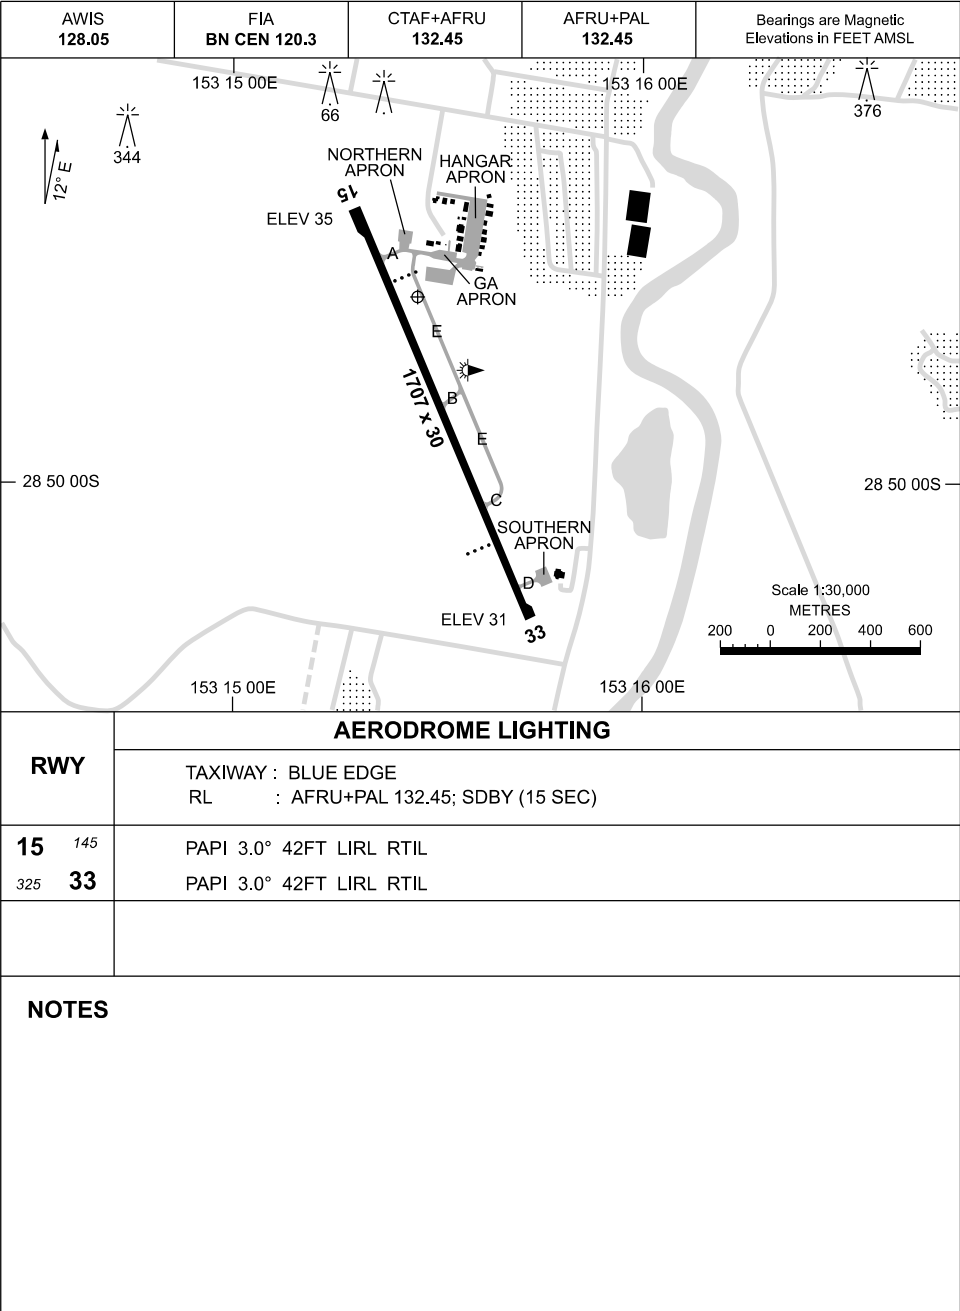

**STANDARD INSTRUMENT DEPARTURES (SID)
LUKLU ONE DEPARTURE (RNAV)
LISMORE, QLD (YLIS)**


09 JUL 2026

AWIS 128.05	FIA BN CEN 120.3	CTAF+AFRU 132.45	AFRU+PAL 132.45		Bearings are Magnetic Elevations in FEET AMSL
----------------	---------------------	---------------------	--------------------	--	--

NOT TO SCALE



RNP 1

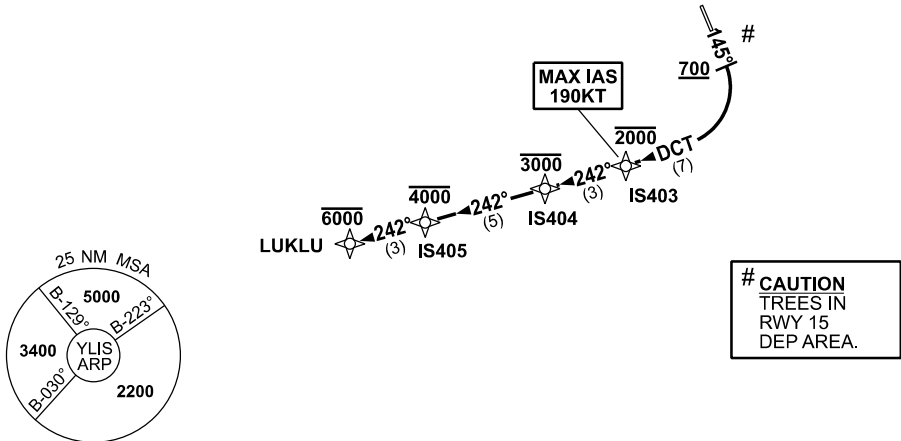

10 NM MSA 3100

LUKLU ONE DEPARTURE

RWY 15

GRAD 4.7% to 700ft, then 3.3%
MAX IAS 190KT until IS403

- Track 145°
- AT or ABOVE 700ft turn RIGHT
- Track DCT to IS403
- **Cross** IS403 AT or BLW 2000ft
- Track 242° to IS404
- **Cross** IS404 AT or BLW 3000ft
- Track 242° to IS405
- **Cross** IS405 AT or BLW 4000ft
- Track 242° to LUKLU
- **Cross** LUKLU AT or BLW 6000ft

Changes: NEW PROCEDURE.

LISDP01-187

**STANDARD INSTRUMENT DEPARTURES (SID)
AKROT ONE DEPARTURE (RNAV)
LISMORE, QLD (YLIS)**



09 JUL 2026

AWIS 128.05	FIA BN CEN 120.3	CTAF+AFRU 132.45	AFRU+PAL 132.45		Bearings are Magnetic Elevations in FEET AMSL
----------------	---------------------	---------------------	--------------------	--	--

NOT TO SCALE



RNP 1

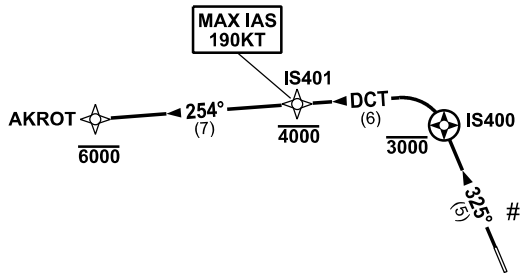

**# CAUTION
TREES IN
RWY 33
DEP AREA.**

10 NM MSA 3100

AKROT ONE DEPARTURE

RWY 33

GRAD 4.1% to 900ft, then 3.3%
MAX IAS 190KT until IS401

- Track 325° to IS400
Cross IS400 AT or BLW 3000ft
- Turn LEFT, track DCT to IS401
Cross IS401 AT or BLW 4000ft
- Track 254° to AKROT
Cross AKROT AT or BLW 6000ft



Changes: NEW PROCEDURE.

LISDP02-187

USE QNH

RNP RWY 15
LISMORE, NSW (YLIS)

09 JUL 2026

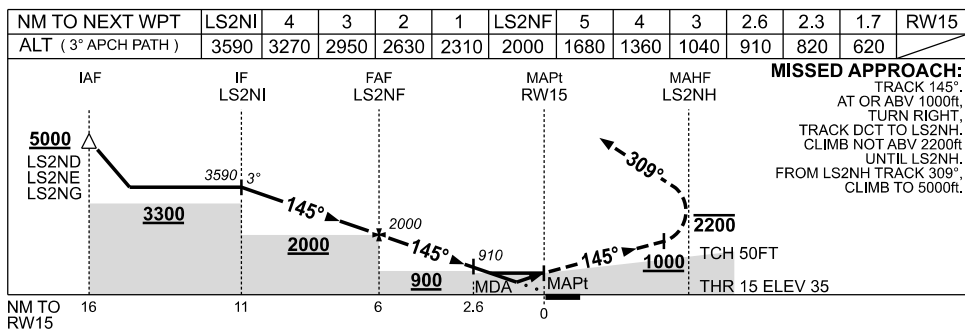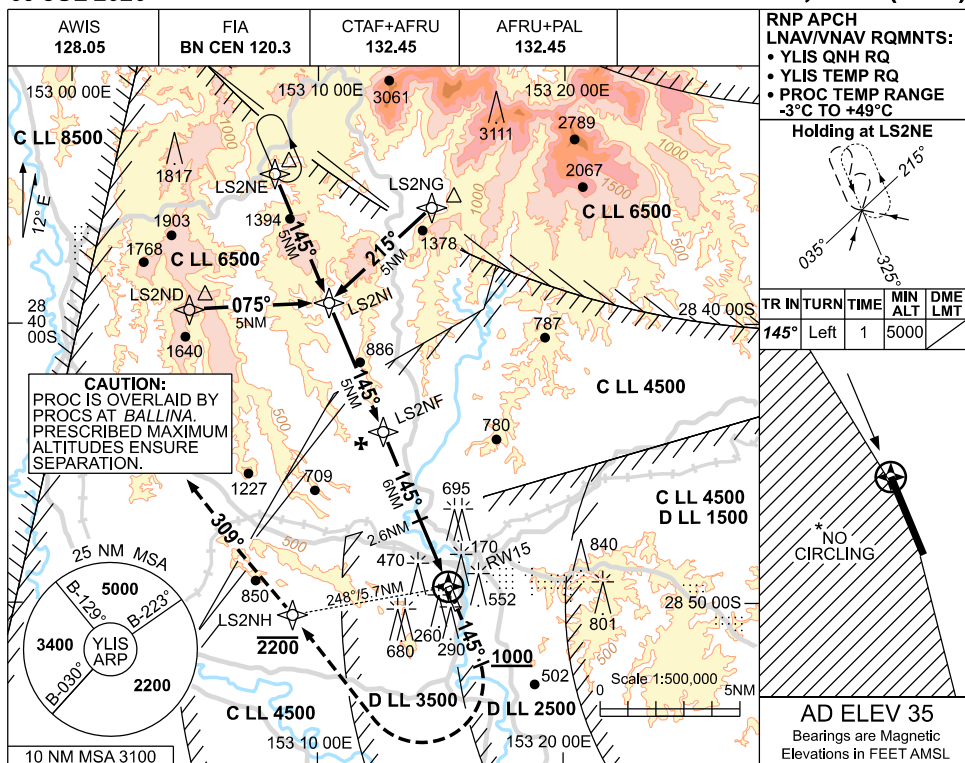

CATEGORY	A	B	C	D
LNAV/VNAV	620 (585-3.3)			NOT APPLICABLE
LNAV	820 (785-4.5)			
CIRCLING *	1060 (1025-2.4)		1310 (1275-4.0)	
ALTERNATE	(1525-4.4)		(1775-6.0)	

- MAX IAS:
INITIAL : 210KT.
MISSED APCH
TURN : 190KT.
HOLDING: 190KT.
- NO CIRCLING WEST
OF RWY 15 / 33.
- COLOUR: SEE
SPEC NOTICES.

Changes: AIRSPACE, REVISED PROC, NOTES, MSA, CIRCLING, WPT NAMING CONVENTION, Editorial.



LISGN01-187

USE QNH

RNP RWY 33

LISMORE, NSW (YLIS)

09 JUL 2026

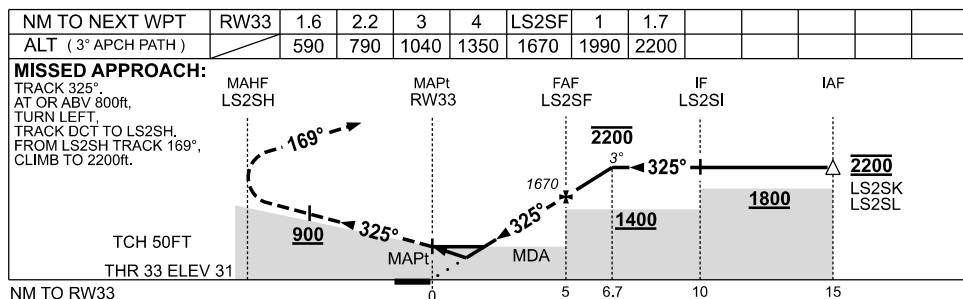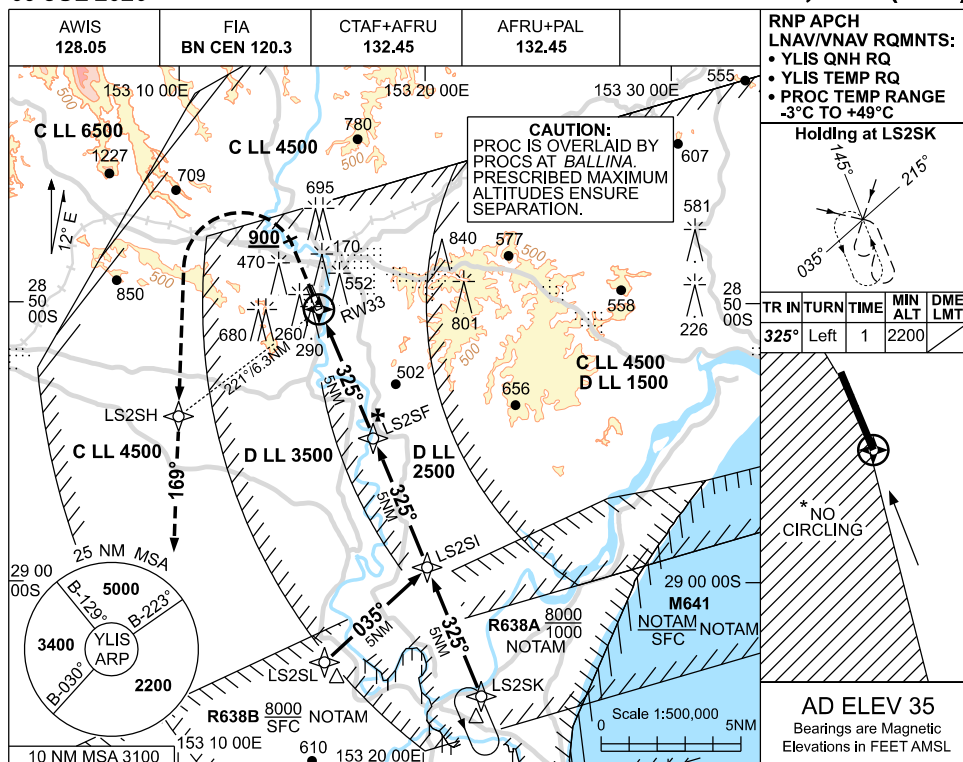

NOTES

1. MAX IAS:
 INITIAL : 210KT.
 MISSED APCH : 190KT.
 TURN : 190KT.
- *2. NO CIRCLING WEST OF RWY 15 / 33.
3. PROC NOT AVBL WHEN **R638A** or **R638B** ACTIVE. ADDITIONALLY, HOLDING AT LS2SK NOT AVBL WHEN **M641** ACTIVE.
4. **COLOUR:**
 SEE SPEC NOTICES.

CATEGORY	A	B	C	D
LNAV/VNAV	590 (559-3.2)			NOT APPLICABLE
LNAV	790 (755-4.3)			
CIRCLING*	1060 (1025-2.4)		1310 (1275-4.0)	
ALTERNATE	(1525-4.4)		(1775-6.0)	

Changes: REVISED PROC, CIRCLING, MSA, AIRSPACE, Editorial.

LISGNO2-187